

Type: \_\_\_\_\_

Model: \_\_\_\_\_

## JARVIS 3-Zone, 300W Smart Transformer

**ORDER CODE:**

490545

**INPUT:**

120VAC 60Hz 2.5A

**OUTPUT:**

300W, 25A, 15V. Three channel independent zone controlled. Single channel can handle full 300W.

**CAUTION: DO NOT exceed 300W total output, including wire load.**

**MAX RATING:**

300VA max | 25A breaker.

**HOUSING:**

304 stainless steel, removable hinged door with lockable latch. Pre-punched knockouts on the bottom side.

**FEATURES:**

- Smart Wi-Fi or Bluetooth landscape transformer.
- IOS, Android, Alexa and Google voice compatible.
- Angled din-rails for easy wire installation.
- 3-zone control, each zone can be programmed individually using a single unit. Settings are saved to the cloud in case of power interruption.
- Scheduling timer control options are independent per channel.
- Sunset & sunrise (digital photocell) with astronomic function.
- Clock timer on/off options.
- Digital power meter (app-specific function) allows viewing of real-time power consumption and monthly history.
- Operating temperature is -20° C to +40° C.
- Integrated short circuit and overload protection.
- Heavy-duty grounded 5' power cord.
- Suitable for wet location.

**AGENCY LISTINGS:**


ETL, conforms to ANSI/UL 1838


**WARRANTY:**

5 years



**DIMENSIONS:**

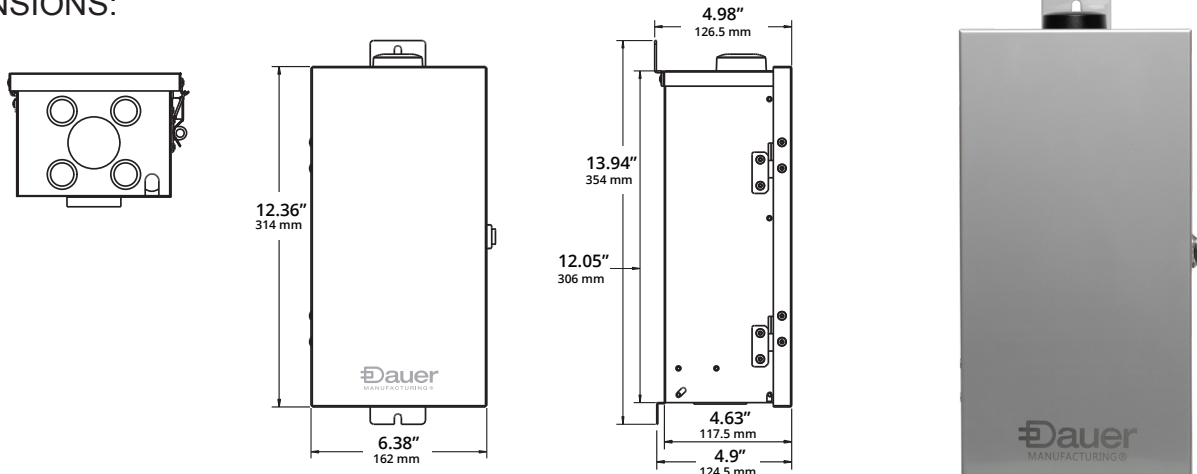

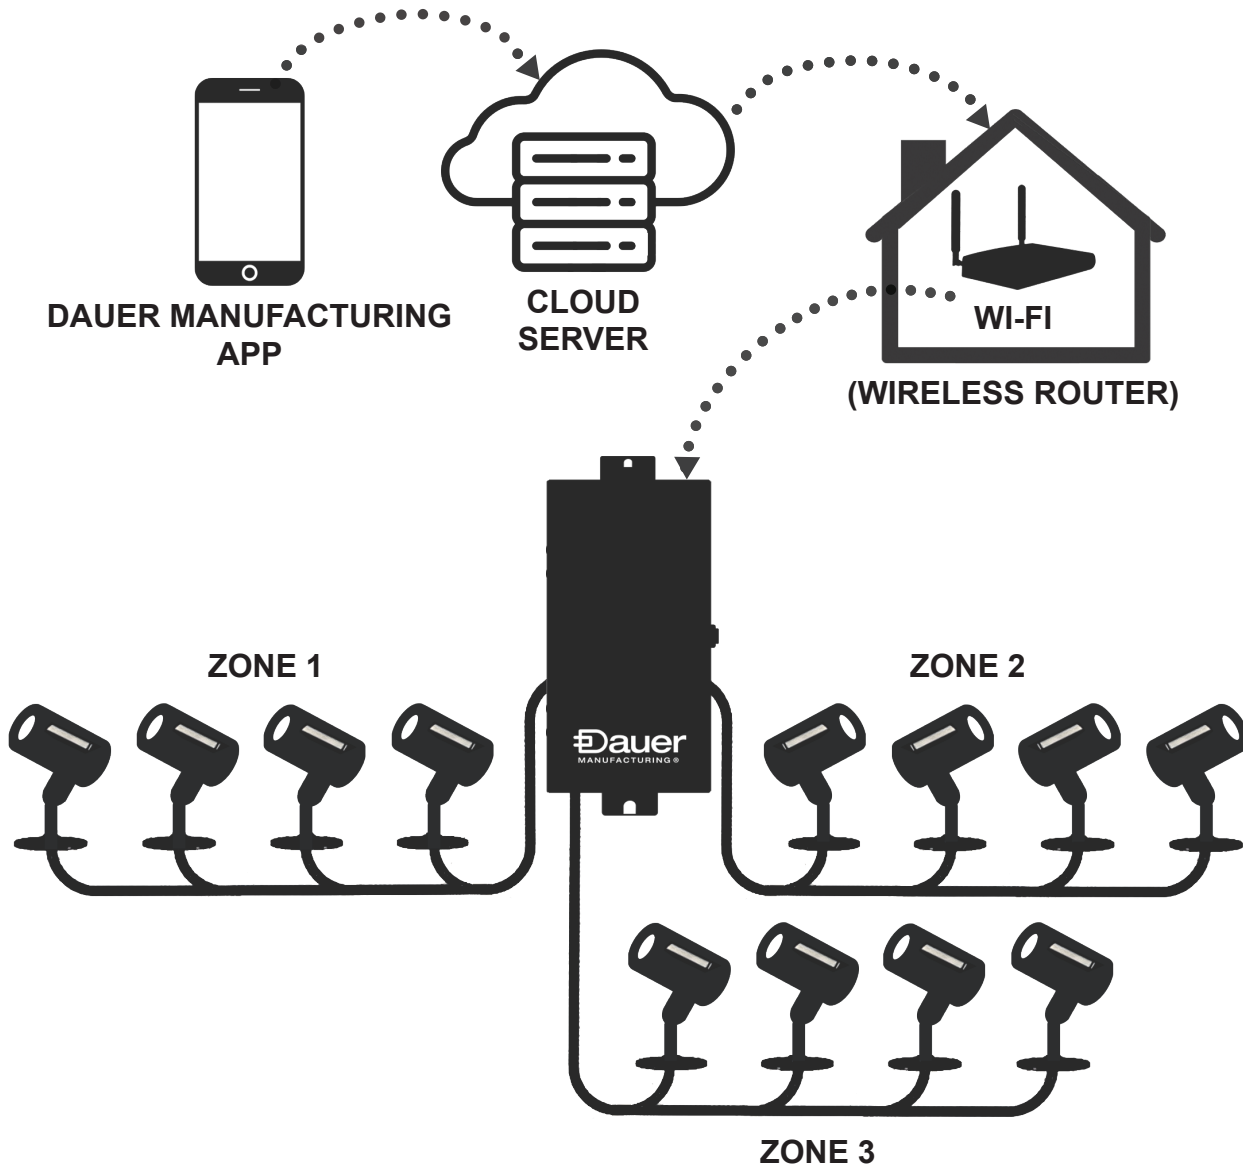

To allow for easier access for wire installation, you may remove the bottom plate by unscrewing the four bottom screws located on the sides of the transformer.

No battery necessary. All settings are saved to the cloud.