SPECIFICATION SHEET



Туре:

Model:

LEX Uplight Fixture

ORDERING CODE:

490105

SPECIFICATIONS

HOUSING:

Cast aluminum.

FINISH:

Architectural bronze. Custom powder coated colors available.

LENS:

Clear flat tempered glass.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket with stainless steel retaining springs.

LAMP TYPE:

12V MR16. LED recommended. 30W halogen or 6W LED maximum.

MOUNTING:

Stem threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories.

WIRING:

Pre-wired with 5' pigtail of 18/2 cable.


WARRANTY:

Five years.

DIMENSIONS:



The Lex uplight features a shroud with O-rings for long-lasting protection. Mounting options are plentiful. Dozens of MR16 LED lamp choices available.

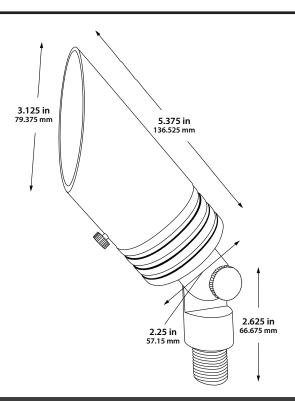



SPECIFICATION SHEET Page 2 LEX Uplight Fixture

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 60°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490105-4W-25-2700K-MS



FIXTURE		LAMP		MOUNTING	RISERS
490105	WATTAGE	BEAM SPREAD	COLOR TEMP.	MS Composite stake (incl.) - 490034 ATM Aluminum Tapered Surface Mount - 490187 AGM Aluminum Gutter Mount - 490188 R6 Aluminum 6-In Riser - 490181 R12 Aluminum 12-In Gutter Mount - 490182 R24 Aluminum 24-In Gutter Mount - 490183	AR6 6-Inch Aluminum Riser - 490181 AR12 12-Inch Aluminum Riser - 490182 AR24 24-Inch Aluminum Riser - 490183
	2W	25° / 40°/ 60°	2700K / 3000K		
	3W	25° / 40°/ 60°	2700K / 3000K		
	4W	25° / 40°/ 60°	2700K / 3000K		
	5W	15° / 25° / 40° / 60°	2700K / 3000K		
		25°	Amber / Blue / Green / Red		
	5W	38°	Purple		
	6W	25° / 40° / 60°	2700K / 3000K		
	7W	15° / 30° / 45° / 60°	2700K / 3000K		