

Type:

Model:

ALBANY LED MR16 Uplight Fixture

ORDERING CODE:

490107

SPECIFICATIONS

HOUSING:

Cast Aluminum. Lock-and-load shroud with treaded O-rings.

FINISH:

Architectural bronze. Custom powder-coated colors available.

LENS:

Tempered glass convex lens.

SOCKET/LAMP HOLDER:

One floating ceramic bi-pin socket with stainless steel retaining springs.

LAMP TYPE:

12V MR16. LED recommended. 35W halogen or 6W LED maximum.

MOUNTING:

Stem threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories.

WIRING:

Pre-wired with 5' pigtail of 18/2 cable.


WARRANTY:

Five years.



The Albany uplight features a "lock-and-load" shroud with O-rings for long-lasting protection. Mounting options are plentiful. Dozens of MR16 LED lamp choices available.

DIMENSIONS:

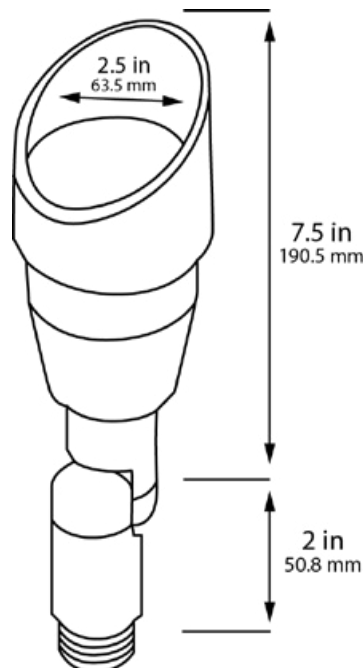

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 60°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490107-4W-25-2700K-MS-R2



FITTURE	LAMP			MOUNTING	RISERS
	WATTAGE	BEAM SPREAD	COLOR TEMP.		
490107	2W	25° / 40° / 60°	2700K / 3000K	MS Composite stake (incl.) - 490034 ATM Aluminum Tapered Surface Mount - 490187 AGM Aluminum Gutter Mount - 490188	AR6 6-Inch Aluminum Riser - 490181 AR12 12-Inch Aluminum Riser - 490182 AR24 24-Inch Aluminum Riser - 490183
	3W	25° / 40° / 60°	2700K / 3000K		
	4W	25° / 40° / 60°	2700K / 3000K		
	5W	15° / 25° / 40° / 60°	2700K / 3000K		
		25°	Amber / Blue / Green / Red		
	5W	38°	Purple		
	6W	25° / 40° / 60°	2700K / 3000K		
	7W	15° / 30° / 45° / 60°	2700K / 3000K		