

Type:

Model:

JARVIS 3-Zone, 300W Smart Transformer

ORDER CODE:

490545

INPUT:

120VAC 60Hz 2.5A

OUTPUT:

300W, 25A, 15V. Three channel independent zone controlled. Single channel can handle full 300W.

CAUTION: DO NOT exceed 300W total output, including wire load.

MAX RATING:

300VA max | 25A breaker.

HOUSING:

304 stainless steel, removable hinged door with lockable latch. Pre-punched knockouts on the bottom side.

FEATURES:

- Smart Wi-Fi or Bluetooth landscape transformer.
- IOS, Android, Alexa and Google voice compatible.
- Angled din-rails for easy wire installation.
- 3-zone control, each zone can be programmed individually using a single unit. Settings are saved to the cloud in case of power interruption.
- Scheduling timer control options are independent per channel.
- Sunset & sunrise (digital photocell) with astronomic function.
- Clock timer on/off options.
- Digital power meter (app-specific function) allows viewing of real-time power consumption and monthly history.
- Operating temperature is -20° C to +40° C.
- Integrated short circuit and overload protection.
- Heavy-duty grounded 5' power cord.
- Suitable for wet location.

AGENCY LISTINGS:


ETL, conforms to ANSI/UL 1838


WARRANTY:

5 years



DIMENSIONS:

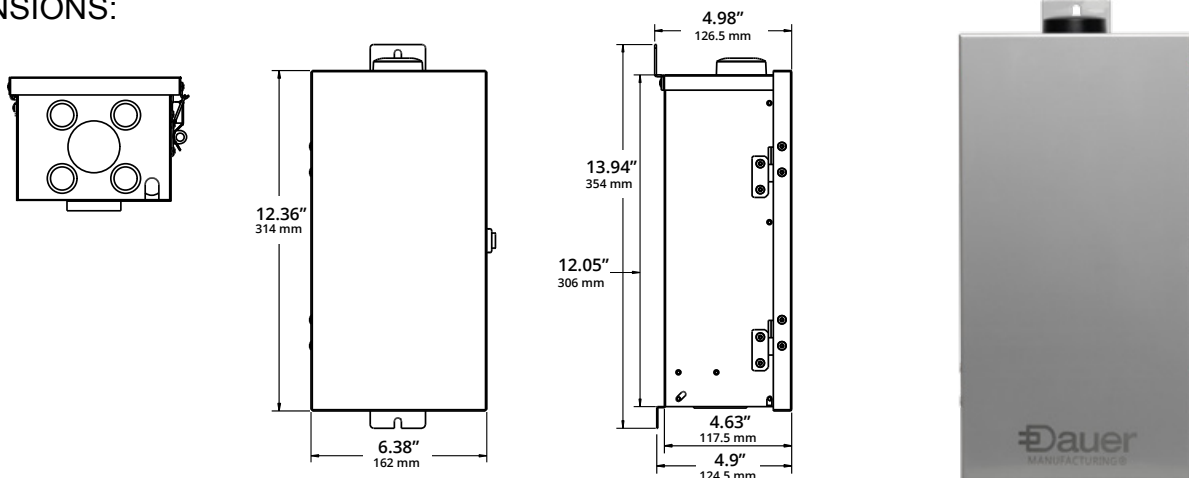

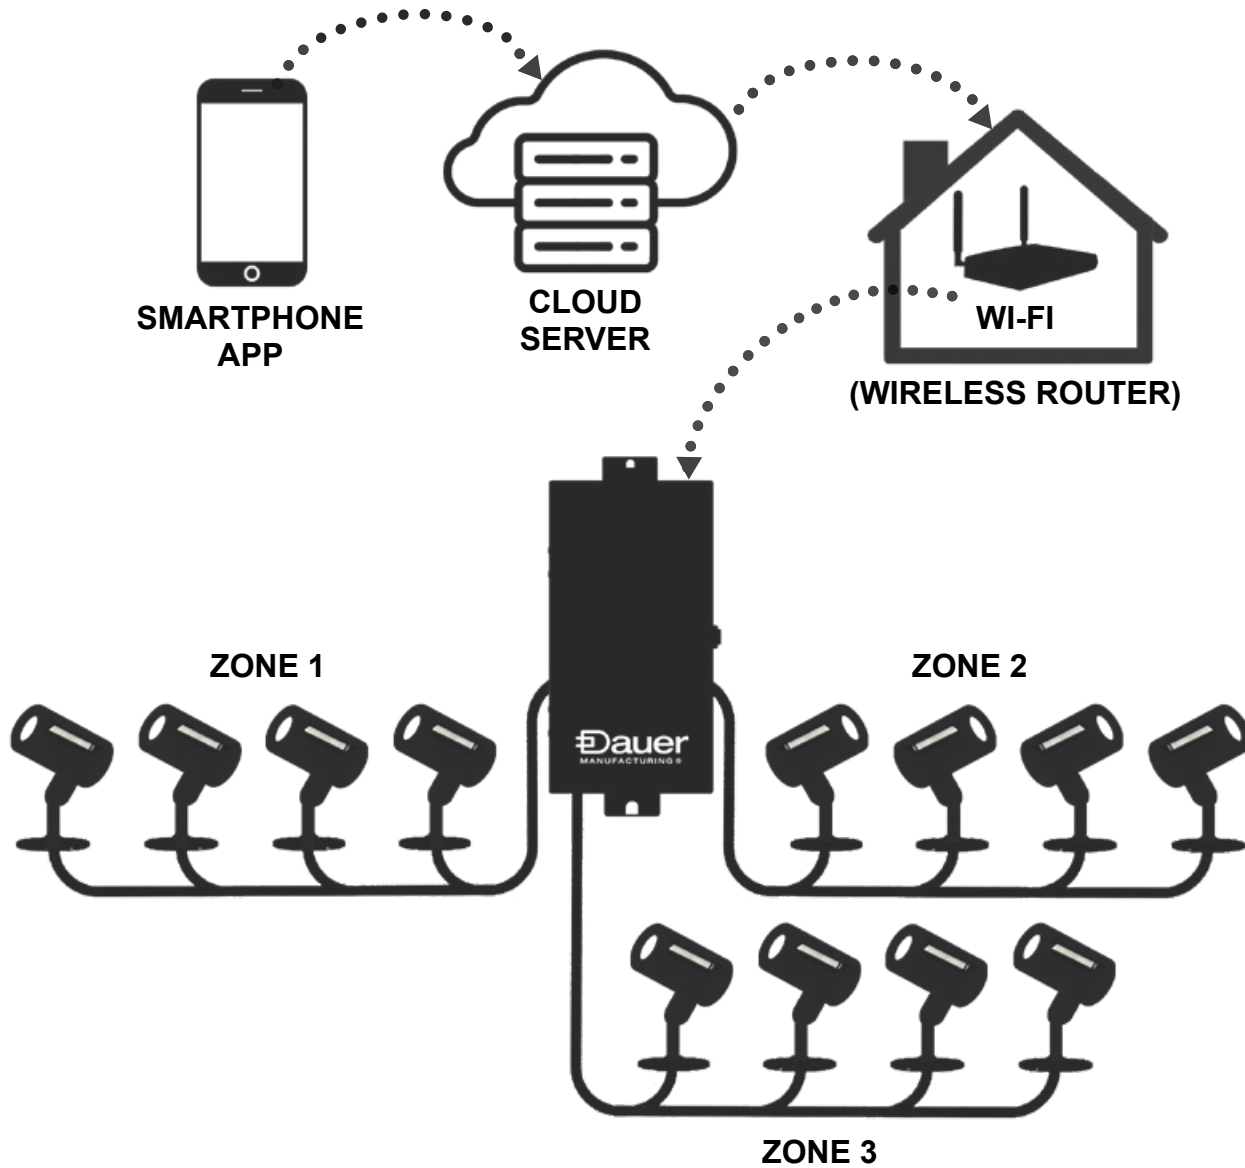

No battery necessary. All settings are saved to the cloud.