


Type:

Model:

**LED 2 × 4 Dimmable Panels**  
**SPECIFICATIONS**

**AGENCY LISTINGS:** ETL.  
**WARRANTY:** Five years.

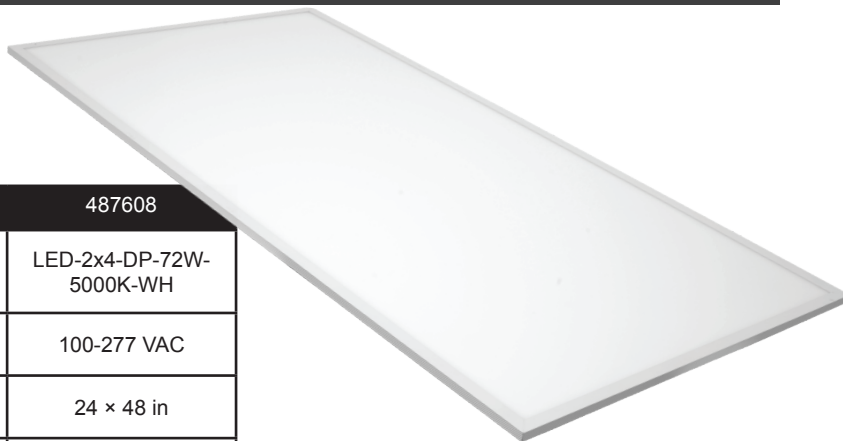

Model	487606	487607	487608
Description	LED-2x4-DP-72W-3000K-WH	LED-2x4-DP-72W-4000K-WH	LED-2x4-DP-72W-5000K-WH
Voltage	100-277 VAC	100-277 VAC	100-277 VAC
Size	24 × 48 in	24 × 48 in	24 × 48 in
Wattage	50 W	50 W	50 W
Color Temperature	3000 K	4000 K	5000 K
Luminous Flux		5000 lm	5000 lm
Efficacy		100 lm/W	100 lm/W



Dauer LED panels are lay-in replacements for fluorescent fixtures. No mercury. Instant on-and-off. Highly efficient with a uniform, pleasant light. Aircraft-cable eye mounts. 0 to 10-volt dimming. Flicker-free. Easy installation. Designed for a 50,000-hour lifetime. Surface-mount kit available. Emergency power (>90 minutes) option is available.

**DIMENSIONS:**

