

Type:

Model:

CARMEL Integrated Path Light Fixture

ORDERING CODE:

489156-2700K

489156-3000K

SPECIFICATIONS

HOUSING:

Cast aluminum.

FINISH:

Architectural bronze. Custom powder coated colors available.

INTEGRATED LED:

Integrated LED array. 3W. 12V. 300 lumens. 3.10 VA at 2700K, 3.10 VA at 3000K. 80 CRI.

LENS:

Polycarbonate.

MOUNTING:

1/2" NPT. Heavy-duty composite stake included with stem. May be mounted into threaded hubs in junction boxes or other mounting accessories.

WIRING:

Pre-wired with 5' pigtail of 18/2 cable.


WARRANTY:

Ten years.



The Carmel path light features a 6.26"-diameter cast aluminum hat. Its underside is a powder-coated reflective white surface. 3W Integrated LED with a 2700K or 3000K color temperature.

DIMENSIONS:

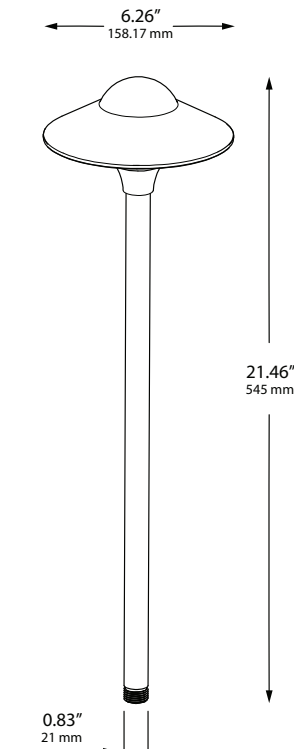

ORDERING CODES:

MODEL	Volts	Wattage	Volt Amps	Lumens	Efficacy	Color Temp.	CRI
489156-2700K	12V	3W	3.10 VA	300 lm	100 lm/W	2700K	80 CRI
489156-3000K	12V	3W	3.10 VA	300 lm	100 lm/W	3000K	80 CRI



FIXTURE ORDERING INFORMATION

To order a fixture with mounting options, select the appropriate choice from each column as in the following example:

489156-2700K-MS-AR12

FIXTURE	MOUNTING	RISERS
489156-2700K 489156-3000K	MS Composite stake (incl.) 490034 ATM Aluminum Tapered Surface Mount - 490187	AR6 6-Inch Aluminum Riser - 490181 AR12 12-Inch Aluminum Riser - 490182 AR24 24-Inch Aluminum Riser - 490183