

Type:

Model:

## SAVANNAH Directional Light Fixture

**ORDERING CODE:**

489901

**SPECIFICATIONS**

**HOUSING:**

Cast brass.

**FINISH:**

Weathered brass. Custom powder coated colors available.

**LENS:**

Clear flat tempered glass.

**SOCKET/LAMP HOLDER:**

One fixed ceramic bi-pin socket with stainless steel retaining springs.

**LAMP TYPE:**

12V MR16. LED recommended. 30W halogen or 7W LED maximum.

**MOUNTING:**

Set-screw-locked 1/2" NPT brass coupling. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories.

**WIRING:**

Pre-wired with 5' pigtail of 18/2 cable.

**WARRANTY:**


Lifetime.



US pat. no. D822,252  
Canadian pat. no. 169820

The Savannah uses one MR16 LED enclosed in a swiveling head that can be aimed with infinite precision vertically and horizontally.

**DIMENSIONS:**

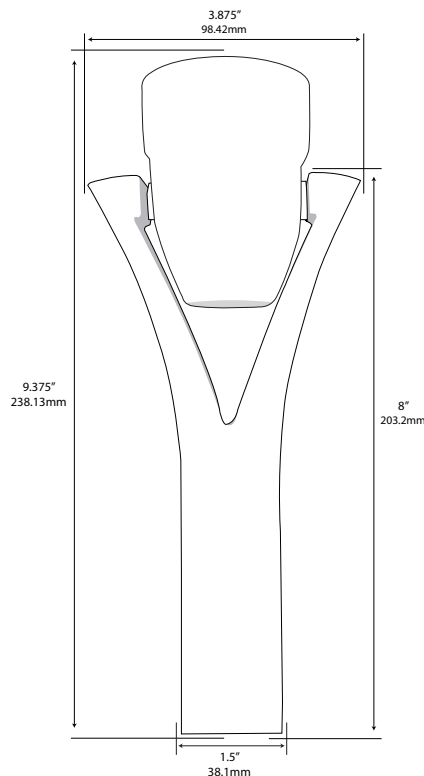

LED LAMP SPECIFICATIONS

**LAMP TYPE:**

Dauer MR16 12V lamp with 5-year warranty.

**OPTICS:**

Integral optics providing available beam spreads from 15° to 120°.

**COLOR TEMPERATURES:**

MR16 available in 2700K and 3000K. Decorative color light options include amber, blue, green, red and purple.

**FIXTURE ORDERING INFORMATION**

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489901-MR16-5W-40-2700K-MS-R2



US pat. no. D822,252  
Canadian pat. no. 169820



FIXTURE	LAMP			MOUNTING	RISER
	WATTAGE	BEAM SPREAD	COLOR TEMP.		
489901	MR16 2W	25°/40°/60°/100°	2700K / 3000K	<b>MS</b> Composite stake (incl.) 490034 <b>PM</b> Round pier mount 490057 <b>M3</b> Trident Heavy-Duty 3-Prong Stake 490036 <b>MP</b> PVC/Brass post stake 490037	<b>R2</b> 2" BRASS RISER 490038 <b>R3</b> 3" BRASS RISER 490039 <b>R6</b> 6" BRASS RISER 490031 <b>R12</b> 12" BRASS RISER 490032 <b>R24</b> 24" BRASS RISER 490033
	MR16 3W	25°/40°/60°	2700K / 3000K		
	MR16 4W	25°/40°/60°/100°	2700K / 3000K		
	MR16 5W	15°/25°/40°/60°/100°	2700K / 3000K		
		25°	Amber / Blue / Green / Red		
	MR16 5W	38°	Purple		
	MR16 6W	25° / 40° / 60°	2700K / 3000K		
	MR16 7W	15°/25°/30°/40°/45°/60°/120°	2700K / 3000K		