

Type:

Model:

FIREFLY LED Path Light Fixture

ORDERING CODE:

489904 (20")
489904-BLK (20" BLACK)
489904-6 (6")
489904-12 (12")

SPECIFICATIONS

HOUSING:

Cast brass.

FINISH:

Weathered brass. Custom powder coated colors available.

LENS:

Clear lens

SOCKET/LAMP HOLDER:

One ceramic GU5.3 bi-pin socket with stainless steel retaining springs, on an adjustable gimbal, accepts MR16 lamps with G4 or GY6.35 bases.

LAMP TYPE:

12V MR16. LED recommended. Halogen 30W maximum or 6W LED maximum.

MOUNTING:

1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or other mounting accessories.

WIRING:


Pre-wired with 5' pigtail of 18/2 cable.

Available in 6", 12" and 20" heights


WARRANTY:

Lifetime.

The Firefly 20" is now available in Black as a standard inventory item.

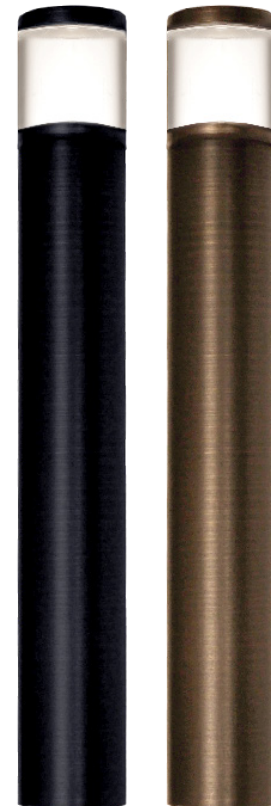

DIMENSIONS:

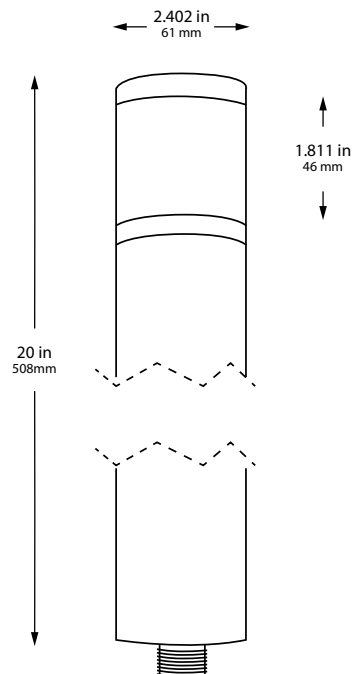

Do not unscrew the top collar above the diffuser. This can damage the fixture.

To replace the lamp, unscrew the bottom collar beneath the diffuser.



6" & 12" heights also available

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

360°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489904-MR16-4W-25-2700K-M3

FIXTURE		LAMP		MOUNTING
489904	WATTAGE	BEAM SPREAD	COLOR TEMP.	MS Composite stake (incl.) 490034 M3 Trident Heavy-Duty 3-Prong Stake 490036 PM Round pier mount 490057 MP PVC/Brass post stake 490037
489904-BLK	2W	25° / 40° / 60° / 100°	2700K / 3000K	
489904-6	3W	25° / 40° / 60°	2700K / 3000K	
489904-12	4W	15°	3000K	
		25° / 40° / 60° / 100°	2700K / 3000K	
	5W	15° / 25° / 40° / 60° / 100°	2700K / 3000K	
		25°	Amber / Blue / Green / Red / Purple	
	6W	25° / 40° / 60°	2700K / 3000K	
	7W	15° / 30° / 45° / 60°	2700K / 3000K	

