

Type:

Model:

## ARIA 16" and 20" LED MR16 Path Light Fixture

**ORDERING CODE:**

489917-P16 (16") 489917-P20 (20")

**SPECIFICATIONS**

**HOUSING:**

Solid brass. Threaded with O-ring. Watertight and bug-tight.

**FINISH:**

Weathered brass. Architectural colors and custom powder coated colors available.

**LENS:**

Clear flat tempered glass.

**SOCKET/LAMP HOLDER:**

One fixed ceramic bi-pin socket with stainless steel retaining springs.

**LAMP TYPE:**

12V MR16. LED recommended. 30W halogen or 7W LED maximum.

**MOUNTING:**

Stake mount included.




**WIRING:**

Pre-wired with 5' pigtail of 18/2 cable.

**WARRANTY:**

Lifetime.

**ARCHITECTURAL COLORS:**

FINE TEXTURE SILVER	
FINE TEXTURE WHITE	
FINE TEXTURE BLACK	

Aria 16" Uplight (489917-P16-S)

Aria 20" Uplight (489917-P20-S)

Aria 16" Uplight (489917-P16-WH)

Aria 20" Uplight (489917-P20-WH)


Aria 16" Uplight (489917-P16-BLK)

Aria 20" Uplight (489917-P20-BLK)



Standard colors: Bronze Aria 16" uplight (489917-P16) / Bronze Aria 20" uplight (489917-P20). Architectural colors and powder coated colors are also available.

### DIMENSIONS:

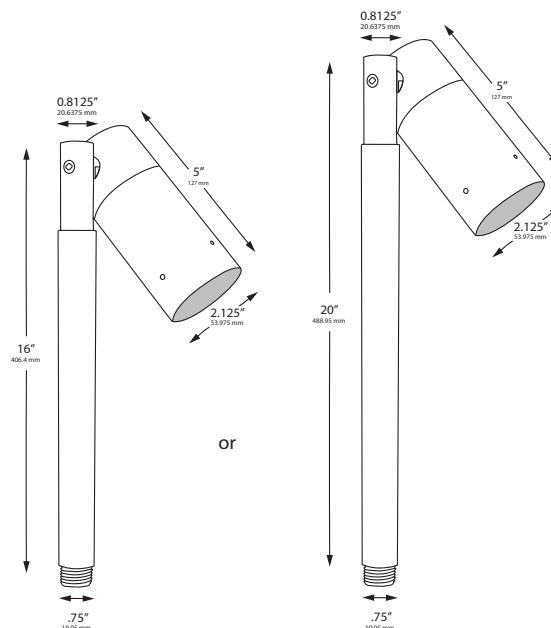

LED LAMP SPECIFICATIONS

**LAMP TYPE:**

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

**OPTICS:**

Integral optics providing available beam spreads from 15° to 120°.

**COLOR TEMPERATURES:**

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

**FIXTURE ORDERING INFORMATION**

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489917-P16-4W-25-2700K-MS



FIXTURE	LAMP			MOUNTING
	WATTAGE	BEAM SPREAD	COLOR TEMP.	
489917-P16	2W	25° / 40° / 60° / 100°	2700K / 3000K	<b>MS</b> Composite stake (incl.) 490034 <b>M3</b> Trident Heavy-Duty 3-Prong Stake 490036 <b>PM</b> Round pier mount 490057 <b>MR</b> Round tapered 3-hole surface mount 490048 <b>MP</b> PVC/Brass post stake 490037
489917-P16-S				
489917-P16 -WH				
489917-P16 -BLK				
489917-P20	3W	25° / 40° / 60°	2700K / 3000K	
489917-P20-S				
489917-P20 -WH	4W	25° / 40° / 60° / 100°	2700K / 3000K	
489917-P20 -BLK				
	5W	15° / 25° / 40° / 60° / 100°	2700K / 3000K	
		25°	Amber / Blue / Green / Red	
	5W	38°	Purple	
	6W	25° / 40° / 60°	2700K / 3000K	
	7W	15° / 30° / 45° / 60° / 120°	2700K / 3000K	