

Type:

Model:

FAIRMONT Shrouded Uplight Fixture

ORDERING CODE:

489920
489920-BLK
489920-FS (floating socket)
489920-FS-BLK (floating socket)

SPECIFICATIONS

HOUSING:

Cast brass. Includes an adjustable 3" shroud with an optional 5" shroud available. Threaded housing with O-ring.

FINISH:

Weathered brass. Custom powder coated colors available.

LENS:

Clear flat tempered glass.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket with stainless steel retaining springs.

LAMP TYPE:

12V MR16. LED recommended. 30W halogen or 7W LED maximum.

MOUNTING:

Stem threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories.

WIRING:

Pre-wired with 5' pigtail of 18/2 cable.

WARRANTY:

Lifetime.



489920 fixture with standard 3" shroud.



489920-BLK
Standard Black offered with 3" shroud only.





489920 fixture with optional 5" shroud (490054).



The Fairmont uplight has an adjustable 3" shroud to control glare (optional 5" shroud available). Easily adjustable swivel to achieve the optimal effect. Numerous mounting options available. A very wide range of MR16 lamp intensities, beam spreads, and hues are available to maximize your creative expression.

DIMENSIONS:

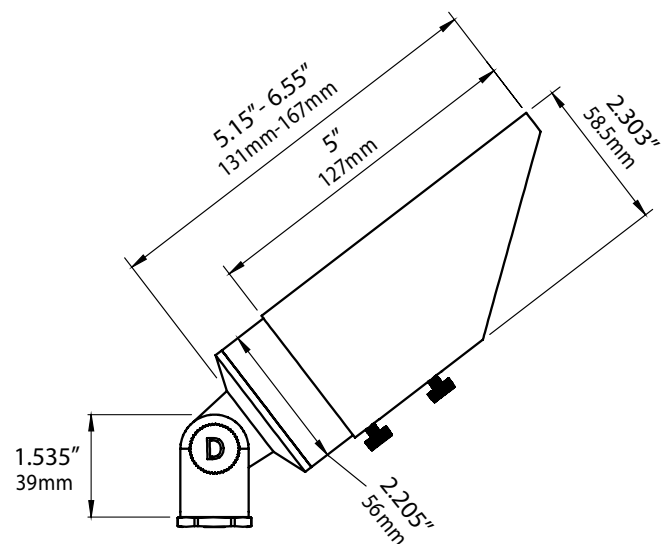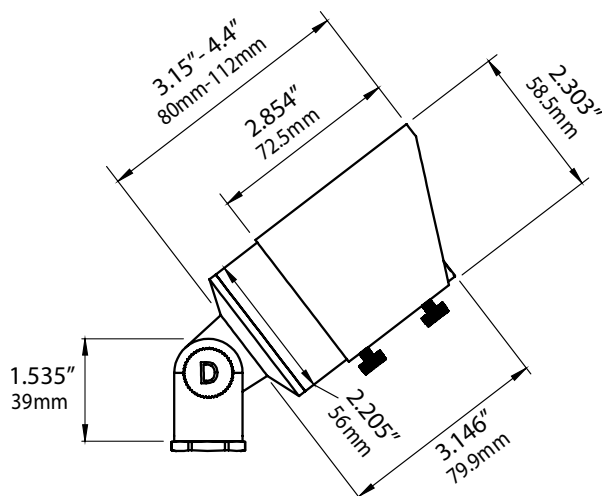

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 120°.


COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489920-4W-25-2700K-MS

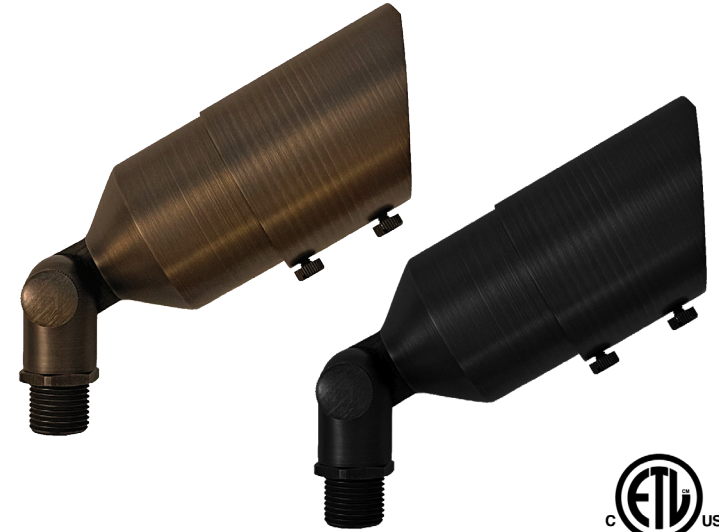

FIXTURE	LAMP			MOUNTING	RISERS
	WATTAGE	BEAM SPREAD	COLOR TEMP.		
489920				MS Composite stake (incl.) - 490034	R2 2" brass riser 490038
489920-BLK	2W	25° / 40° / 60°/100°	2700K / 3000K	M3 Trident Heavy-Duty 3-Prong Stake - 490036	R3 3" brass riser 490039
489920-FS (floating socket)	3W	25° / 40° / 60°	2700K / 3000K	PM Round pier mount - 490057	R6 6" brass riser 490031
489920-FS-BLK (floating socket)	4W	25° / 40° / 60°/100°	2700K / 3000K	MR Round tapered 3-hole surface mount - 490048	R12 12" brass riser 490032
	5W	15° / 25° / 40° / 60°/100°	2700K / 3000K	MP PVC/Brass post stake - 490037	R24 24" brass riser 490033
		25°	Amber / Blue / Green / Red		
	5W	38°	Purple	SH Brass 5" shroud - 490055	
	6W	25° / 40° / 60°	2700K / 3000K	GM Brass gutter mount - 490047	
7W	15° / 30° / 45° / 60 /120°	2700K / 3000K	RMP Round Brass Electrical Mounting Plate - 490043		
			REP Rectangular Brass Electrical Mounting Plate - 490044		