

Type:

Model:

## FAIRMONT Shrouded Uplight Fixture

**ORDERING CODE:**  
489920

### SPECIFICATIONS

**HOUSING:**  
Cast brass. Includes an adjustable 3" shroud with an optional 5" shroud available. Threaded housing with O-ring.

**FINISH:**  
Weathered brass. Custom powder coated colors available.

**LENS:**  
Clear flat tempered glass.

**SOCKET/LAMP HOLDER:**  
One fixed ceramic bi-pin socket with stainless steel retaining springs.

**LAMP TYPE:**  
12V MR16. LED recommended. 30W halogen or 7W LED maximum.

**MOUNTING:**  
Stem threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories.

**WIRING:**  
Pre-wired with 5' pigtail of 18/2 cable.

**WARRANTY:**  
Lifetime.




489920 fixture with standard 3" shroud.

489920 fixture with optional 5" shroud (490055).

The Fairmont uplight has an adjustable 3" shroud to control glare (optional 5" shroud available). Easily adjustable swivel to achieve the optimal effect. Numerous mounting options available. A very wide range of MR16 lamp intensities, beam spreads, and hues are available to maximize your creative expression.

### DIMENSIONS:

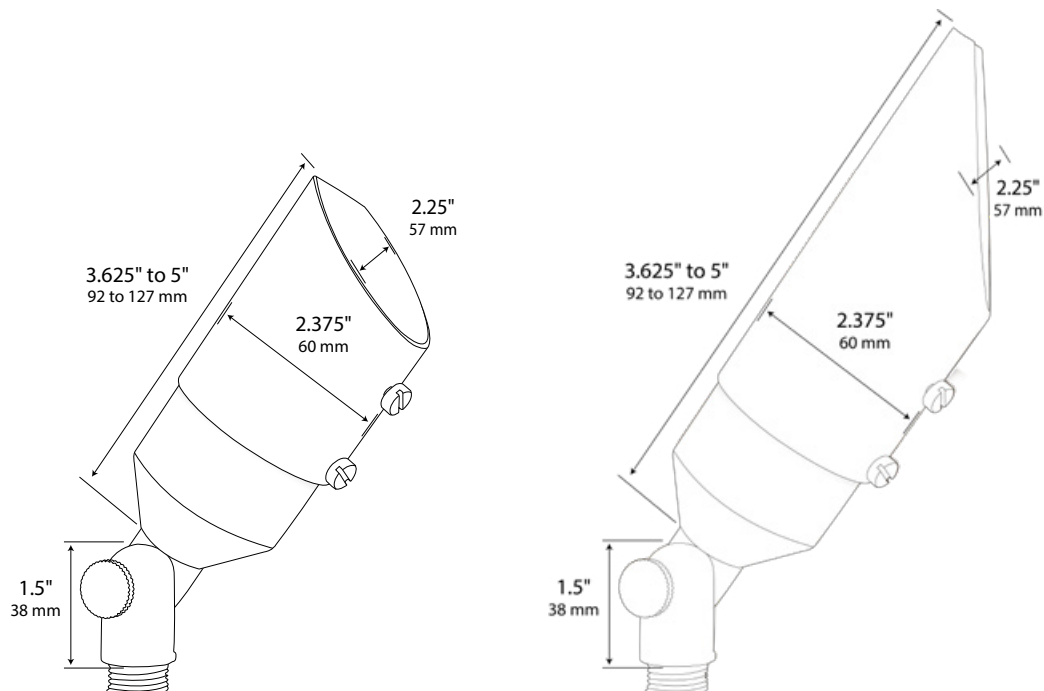

## LED LAMP SPECIFICATIONS

### LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

### OPTICS:

Integral optics providing available beam spreads from 15° to 120°.

### COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

## FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489920-4W-25-2700K-MS



FIXTURE	LAMP			MOUNTING	RISERS
489920	WATTAGE	BEAM SPREAD	COLOR TEMP.	<b>MS</b> Composite stake (incl.) - 490034	<b>R2</b> 2" brass riser 490038
	2W	25° / 40° / 60°/100°	2700K / 3000K	<b>M3</b> Trident Heavy-Duty 3-Prong Stake - 490036	<b>R3</b> 3" brass riser 490039
	3W	25° / 40° / 60°	2700K / 3000K	<b>PM</b> Round pier mount - 490057	<b>R6</b> 6" brass riser 490031
	4W	25° / 40° / 60°/100°	2700K / 3000K	<b>MR</b> Round tapered 3-hole surface mount - 490048	<b>R12</b> 12" brass riser 490032
	5W	15° / 25° / 40° / 60°/100°	2700K / 3000K	<b>MP</b> PVC/Brass post stake - 490037	<b>R24</b> 24" brass riser 490033
		25°	Amber / Blue / Green / Red	<b>SH</b> Brass 5" shroud - 490055	
	5W	38°	Purple	<b>GM</b> Brass gutter mount - 490047	
	6W	25° / 40° / 60°	2700K / 3000K	<b>RMP</b> Round Brass Electrical Mounting Plate - 490043	
7W	15° / 30° / 45° / 60 / 120°	2700K / 3000K	<b>REP</b> Retangular Brass Electrical Mounting Plate - 490044		