

Type:

Model:

STARDUST Pendant Fixture

ORDERING CODE:

489924

SPECIFICATIONS

HOUSING:

Solid brass. Threaded O-ring, decorative vents, brass chain and canopy included.

FINISH:

Weathered brass. Custom powder coated colors available.

LENS:

No lens.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket with stainless steel retaining springs.

LAMP TYPE:

12V MR16 or bi-pin. LED recommended. 30W halogen or 7W LED maximum.

MOUNTING:

17.5" brass chain (field-adjustable) and canopy mounting bracket.

WIRING:

Pre-wired with 5' pigtail of 18/2 cable.



WARRANTY:

Lifetime.



The Stardust hanging pendant is crafted from solid brass with a decorative vented shroud that casts a romantic light. Choose from various intensities of cool-white MR16 LED lamps for a moonlight effect, or a warm-white bi-pin or MR16 LED for a traditional lantern effect.

DIMENSIONS:

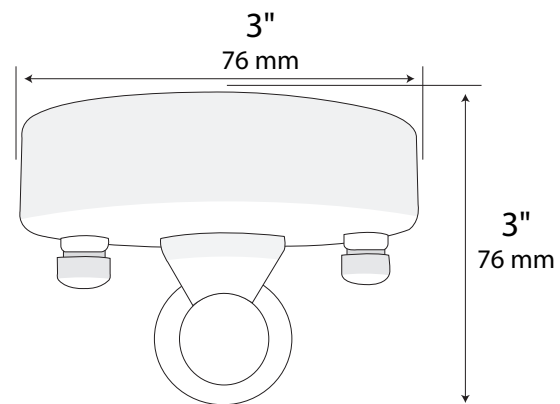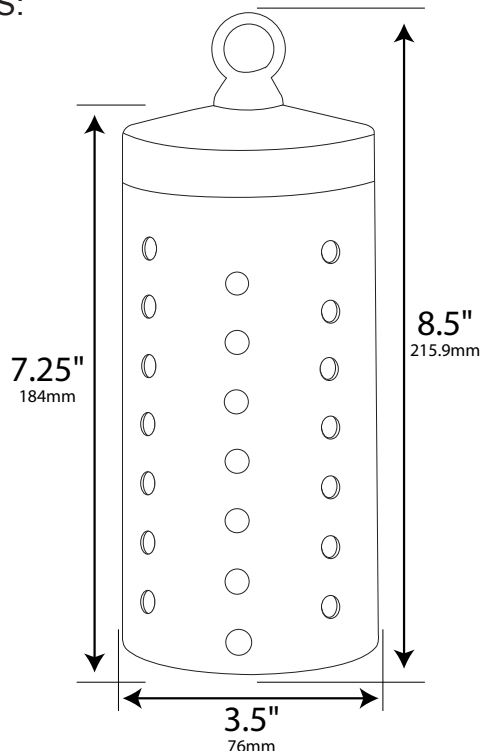

Canopy

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp or bi-pin with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 60° for MR16 lamp (or no optics for bi-pin lamp).

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489924-MR16-4W-25-2700K



FIXTURE		LAMP	
489924	WATTAGE	BEAM SPREAD	COLOR TEMP.
	MR16 2W	25° / 40° / 60°	2700K / 3000K
	MR16 3W	25° / 40° / 60°	2700K / 3000K
	MR16 4W	25° / 40° / 60°	2700K / 3000K
	MR16 5W	15° / 25° / 40° / 60°	2700K / 3000K
		25°	Amber / Blue / Green / Red
	MR16 5W	38°	Purple
	MR16 6W	25° / 40° / 60°	2700K / 3000K
	MR16 7W	15° / 30° / 45° / 60°	2700K / 3000K
	Bi-pin 2W		2700K / 3000K
	Bi-pin 3W		2700K / 3000K
	Bi-pin 3.3W		Amber / Blue / Green / Red
	Bi-pin 4W		Amber
	Bi-pin 4W		2700K / 3000K
	Bi-pin 4W		2700K-HO / 3000K-HO