

Type:

Model:

BILTMORE Brass LED Mini Flood Light With Shroud

SPECIFICATIONS

VOLTAGE:
12 volts AC/DC.

HOUSING:
Cast Brass.

FINISH:
Weathered brass. Custom powder coated colors available.

MOUNTING:
Threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories



WIRING:
Pre-wired with a 5' 18/2 cable.

WARRANTY:
Ten Years.



Ideal for applications such as landscape lighting, sign lighting, and building accent lighting. 150° (7H x 7V) beam.

DIMENSIONS:

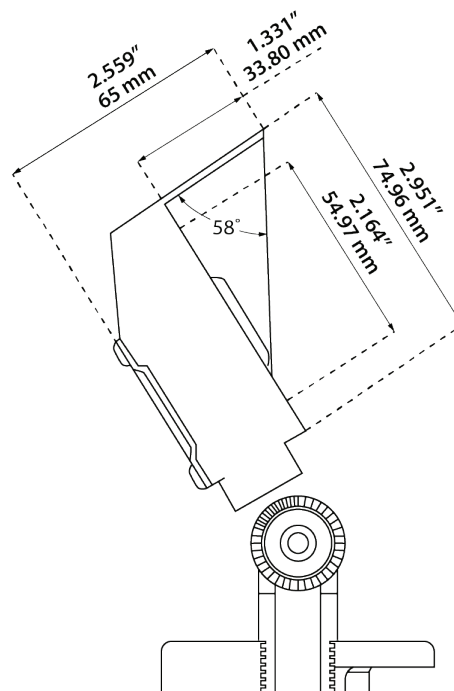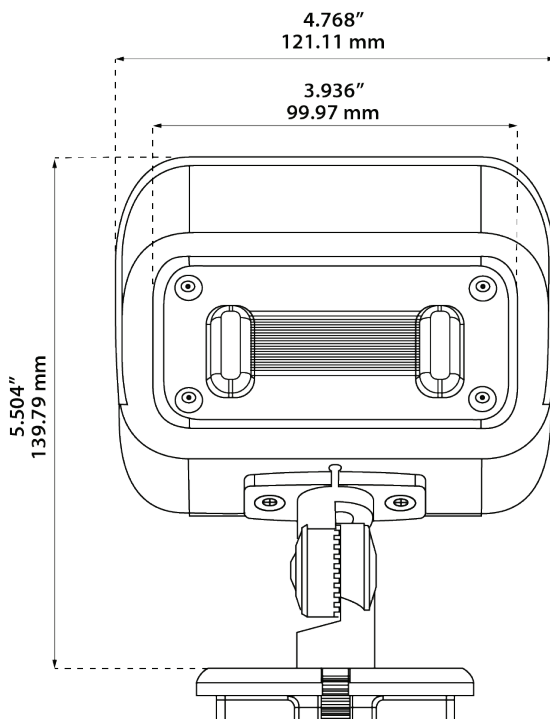

LED LAMP SPECIFICATIONS

LAMP TYPE:
Integrated LED.

OPTICS:
Integral optics providing available beam spread of 150° (7H x 7V).

COLOR TEMPERATURES:
Color temperature options provide the following qualities: 2700K or 3000K.

FIXTURE ORDERING INFORMATION
To order a fixture, select the appropriate choice from each column as in the following example:

EXAMPLE: 489940-MS



Model	489960	489961	489940	489941	489943	489944	489946	489947	Mounting
Description	BRASS MINI FLOOD 12V 4W 2700K	BRASS MINI FLOOD 12V 4W 3000K	LED-MF-BR-7W-2700K-12V	LED-MF-BR-7W-3000K-12V	LED-MF-BR-12W-2700K-12V	LED-MF-BR-12W-3000K-12V	BRASS MINI FLOOD 12V 20W 2700K	BRASS MINI FLOOD 12V 20W 3000K	MS Composite stake (incl.) 490034 M3 Trident Heavy-Duty 3-Prong Stake 490036 PM Round pier mount 490057 MR Round tapered 3-hole surface mount 490048 MP PVC/Brass post stake 490037
Wattage	4W	4W	7W	7W	12W	12W	20W	20W	
Lumens	312lm	356lm	544lm	626lm	918lm	1044lm	1720lm	1780lm	
Efficacy	78lm/W	89lm/W	77.71 lm/W	89.41 lm/W	76.53 lm/W	87lm/W	86lm/W	89lm/W	
Volt Amps	-	3.89VA	6.98VA	6.94VA	12.98VA	13.51VA	22.60VA	22.43VA	
Color Temperature	2700K	3000K	2700K	3000K	2700K	3000K	2700K	3000K	
CRI	70	70	70	70	70	70	70	70	