

Type:

Model:

## ASTOR LED MR16 Uplight Fixture

**ORDERING CODE:**

490007  
490007-FS (floating socket)

**SPECIFICATIONS**

**HOUSING:**

Cast brass. Lock-and-load shroud with double O-rings.

**FINISH:**

Weathered brass. Custom powder coated colors available.

**LENS:**

Tempered glass convex lens.

**SOCKET/LAMP HOLDER:**

One fixed ceramic bi-pin socket with stainless steel retaining springs.

**LAMP TYPE:**

12V MR16. LED recommended. 35W halogen or 7W LED maximum.

**MOUNTING:**

Stem threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories.




**WIRING:**

Pre-wired with 5' pigtail of 18/2 cable.

**WARRANTY:**

Lifetime.


**ARCHITECTURAL COLORS:**

<b>FINE TEXTURE SILVER</b>		490007-S
<b>FINE TEXTURE WHITE</b>		490007-WH
<b>FINE TEXTURE BLACK</b>		490007-BLK



The sleek Astor uplight features a tempered glass convex lens that illuminates foliage and outdoor scenery with soft, mellow light. Crafted from cast brass with a brass-knobbed swivel for creative directionality. A "lock-and load" shroud features double O-rings for long-lasting protection.

**DIMENSIONS:**

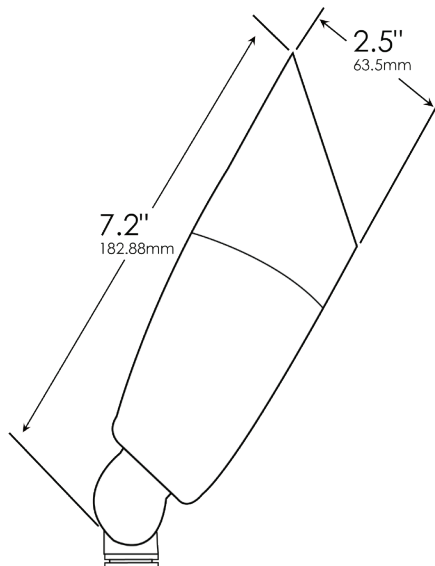

LED LAMP SPECIFICATIONS

**LAMP TYPE:**

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

**OPTICS:**

Integral optics providing available beam spreads from 15° to 60°.

**COLOR TEMPERATURES:**

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

**FIXTURE ORDERING INFORMATION**

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490007-4W-25-2700K-MS-R2



FIXTURE	LAMP			MOUNTING	RISER
	WATTAGE	BEAM SPREAD	COLOR TEMP.		
490007 490007-S 490007-WH 490007-BLK 490007-FS (floating socket)	2W	25° / 40° / 60°	2700K / 3000K	<b>MS</b> Composite stake (incl.) 490034 <b>M3</b> Trident Heavy-Duty 3-Prong Stake 490036 <b>PM</b> Round pier mount 490057 <b>MR</b> Round tapered 3-hole surface mount 490048 <b>MP</b> PVC/Brass post stake 490037 <b>GM</b> Brass gutter mount 490047 <b>RMP</b> Round Brass Electrical Mounting Plate - 490043 <b>REP</b> Retangular Brass Electrical Mounting Plate - 490044	<b>R2</b> 2" brass riser 490038 <b>R3</b> 3" brass riser 490039 <b>R6</b> 6" brass riser 490031 <b>R12</b> 12" brass riser 490032 <b>R24</b> 24" brass riser 490033
	3W	25° / 40° / 60°	2700K / 3000K		
	4W	25° / 40° / 60°	2700K / 3000K		
	5W	15° / 25° / 40° / 60°	2700K / 3000K		
		25°	Amber / Blue / Green / Red		
	5W	38°	Purple		
	6W	25° / 40° / 60°	2700K / 3000K		
	7W	15° / 30° / 45° / 60°	2700K / 3000K		