# SPECIFICATION SHEET



Туре:

Model:

# DIPLOMAT LED BI-Pin Wall Wash Fixture

## ORDERING CODE:

490010

### **SPECIFICATIONS**

#### HOUSING:

Cast brass. Angled shroud.

#### FINISH:

Weathered brass. Custom powder coated colors available.

# LENS:

Clear and frosted tempered glass lenses included.

#### SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket accepts bi-pin lamps with G4 or GY6.35 base.

#### LAMP TYPE:

12V MR16 or bi-pin. LED recommended. 35W halogen or 7W LED maximum.

#### **MOUNTING:**

1/2" NPT. Heavy-duty composite stake included with stem. May be mounted into threaded hubs in junction boxes or other mounting accessories.

### WIRING:

Pre-wired with 5' pigtail of 18/2 cable.

#### WARRANTY:


Lifetime.





The Diplomat large wall wash casts a very broad and even light on surfaces and scenery. Choose between the included clear and frosted lens options. The lens is gasketed onto an angled shroud. Dozens of bi-pin lamp options maximize your creative expression for wall washing applications, or install an MR16 LED lamp if you desire a longer throw or narrower, more directional beam-spread options ranging from 15° to 120°. Heavy-duty stake included.

# DIMENSIONS:

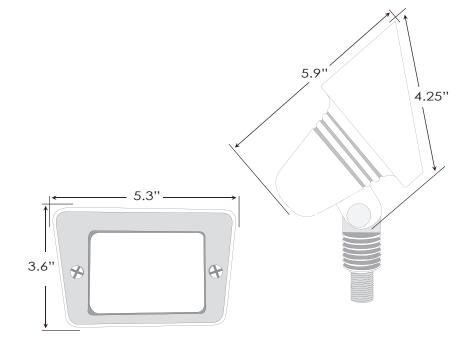



# SPECIFICATION SHEET Page 2 DIPLOMAT LED BI-Pin Wall Wash Fixture

## LED LAMP SPECIFICATIONS

## LAMP TYPE:

12V Dauer MR16 lamp or bi-pin with 5-year warranty, dimmable, and suitable for enclosed luminaires. **OPTICS:** 

Integral optics providing available beam spreads from 15° to 120° for MR16 lamp (or no optics for bi-pin lamp).

### COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K, 3000K. Decorative color light options include amber, blue, green, red and purple.

### FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE (MR16): 490010-MR16-4W-60°-2700K-MS-R2 EXAMPLE (BI-PIN): 490010-BP-4WHO-2700K-MS-R2





FIXTURE		LAMP		MOUNTING	RISER
490010	WATTAGE	BEAM SPREAD	COLOR TEMP.	<b>MS</b> Composite stake (incl.) 490034	<b>R2</b> 2" brass riser 490038
	MR16 2W	25° / 40°/ 60° / 100°	2700K / 3000K	Stake 490036 <b>R6</b> 6" bra <b>PM</b> Round pier mount 490057	<b>R3</b> 3" brass riser 490039
	MR16 3W	25° / 40°/ 60°	2700K / 3000K		<b>R6</b> 6" brass riser 490031
	MR16 4W	25° / 40°/ 60° / 100°	2700K / 3000K		
	MR16 5W	15° / 25° / 40° / 60° /100°	2700K / 3000K	<b>MR</b> Round tapered 3-hole surface mount 490048	<b>R12</b> 12" brass riser 490032
		25°	Amber / Blue / Green / Red		<b>R24</b> 24" brass riser 490033
	MR16 5W	38°	Purple	<b>MP</b> PVC/Brass post stake 490037	
	MR16_6W	25° / 40° / 60°	2700K / 3000K		
	MR16 7W	15° / 30° / 45° / 60° / 120°	2700K / 3000K		
	Bi-pin 2W		2700K / 3000K	1	
	Bi-pin 3W		2700K / 3000K		
	Bi-pin 3.3W		Amber / Blue / Green / Red		
	Bi-pin 4W		Amber		
	Bi-pin 4W		2700K / 3000K		
	Bi-pin 4WHO		2700K-HO / 3000K-HO		