

Type:

Model:

COLONY Pendant Fixture

ORDERING CODE:

490088

SPECIFICATIONS

HOUSING:

Solid brass. Threaded O-ring, decorative vents, brass chain and canopy included.

FINISH:

Weathered brass. Custom powder coated colors available.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket with stainless steel retaining springs.

LAMP TYPE:

12V MR16 or bi-pin. LED recommended. 30W halogen or 7W LED maximum.

MOUNTING:

17.5" brass chain (field-adjustable) and canopy mounting bracket.

WIRING:

Pre-wired with 5' pigtail of 18/2 cable.


WARRANTY:

Lifetime.



The Colony hanging pendant is crafted from solid brass with a decorative vented shroud that casts a romantic light. Choose from various intensities of cool-white MR16 LED lamps for a moonlight effect, or a warm-white bi-pin or MR16 LED for a traditional lantern effect.

DIMENSIONS:

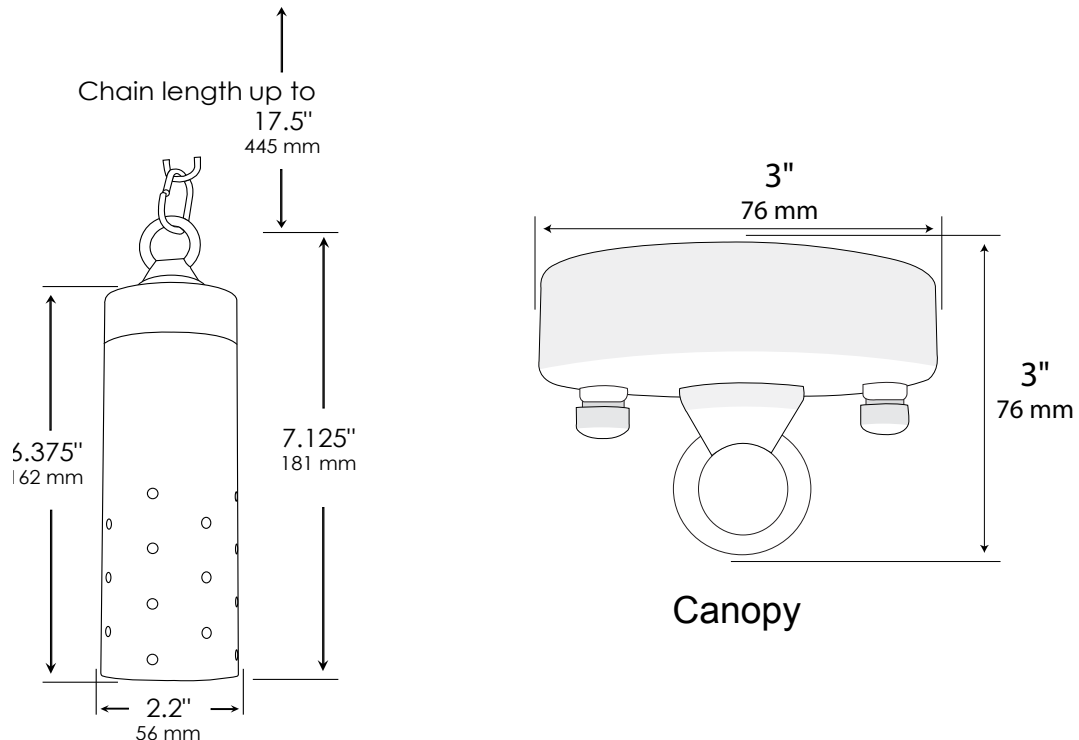

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp or bi-pin with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 60° for MR16 lamp (or no optics for bi-pin lamp).

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490088-MR16-4W-25-2700K



| FIXTURE | | LAMP | |
|---------|-------------|-----------------------|----------------------------|
| 490088 | WATTAGE | BEAM SPREAD | COLOR TEMP. |
| | MR16 2W | 25° / 40° / 60° | 2700K / 3000K |
| | MR16 3W | 25° / 40° / 60° | 2700K / 3000K |
| | MR16 4W | 25° / 40° / 60° | 2700K / 3000K |
| | MR16 5W | 15° / 25° / 40° / 60° | 2700K / 3000K |
| | | 25° | Amber / Blue / Green / Red |
| | MR16 5W | 38° | Purple |
| | MR16 6W | 25° / 40° / 60° | 2700K / 3000K |
| | MR16 7W | 15° / 30° / 45° / 60° | 2700K / 3000K |
| | Bi-pin 2W | | 2700K / 3000K |
| | Bi-pin 3W | | 2700K / 3000K |
| | Bi-pin 3.3W | | Amber / Blue / Green / Red |
| | Bi-pin 4W | | Amber |
| | Bi-pin 4W | | 2700K / 3000K |
| | Bi-pin 4W | | 2700K-HO / 3000K-HO |