

Type:

Model:

## LED Mini Flood Light

### SPECIFICATIONS

**VOLTAGE:**

120 to 277V 50/60Hz (12V models also available)

**HOUSING:**

Sealed cast aluminum. Shroud must be purchased separately.

**FINISH:**

Architectural bronze. Custom powder coated colors available.

**MOUNTING:**

Threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes.

**WIRING:**

Pre-wired five-foot 18/2 SPT1 lead.

**WARRANTY:**

Ten Years.



With optional 2" shroud.




With optional 4" shroud.




Ideal for applications such as landscape lighting, moon lighting, architectural wall washing and sign lighting. 10kV/10kA surge protection. 150° (7H x 7V) beam. Optional shroud available. Shrouds must be ordered separately.

### DIMENSIONS:


15W

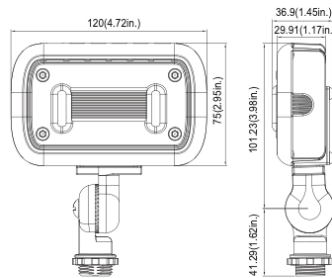

30W

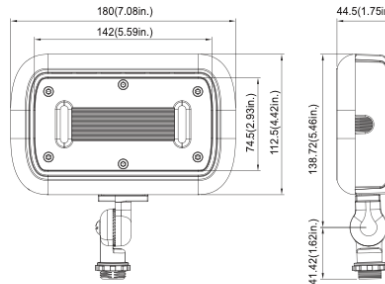

45W

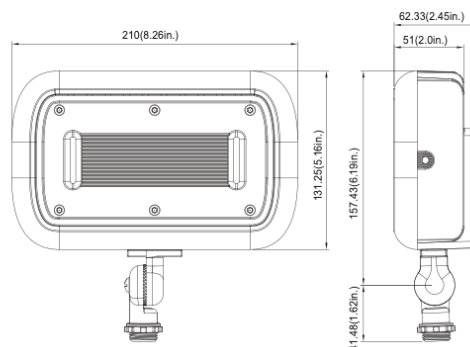

LED LAMP SPECIFICATIONS

**LAMP TYPE:**

Integrated LED.

**OPTICS:**

Integral optics providing available beam spreads 150° (7H x 7V) beam.

**COLOR TEMPERATURES:**

Color temperature options provide the following qualities: 2700K, 3000K, 4000K or 5000K.


**FIXTURE ORDERING INFORMATION**

To order a fixture, select the appropriate choice from each column as in the following example:


EXAMPLE: 490692




Model	490692	490693	490673	490694	490695	490674	490696	490697	490675	Mounting
<b>Description</b>	LED-MF-15W-2700K-120/277	LED-MF-15W-3000K-120/277	LED-MF-15W-5000K-120/277	LED-MF-30W-2700K-120/277	LED-MF-30W-3000K-120/277	LED-MF-30W-5000K-120/277	LED-MF-45W-2700K-120/277	LED-MF-45W-3000K-120/277	LED-MF-45W-5000K-120/277	<b>MS</b> Composite stake (incl.) 490034 <b>ATM</b> Aluminum Tapered Surface Mount - 490187 <b>AGM</b> Aluminum Gutter Mount - 490188 <b>AR6</b> Aluminum 6-In Riser - 490181 <b>AR12</b> Aluminum 12-In Gutter Mount - 490182 <b>AR24</b> Aluminum 24-In Gutter Mount - 490183
<b>Wattage</b>	15W	15W	15W	30W	30W	30W	45W	45W	45W	
<b>Lumens</b>	1140 lm	1290 lm	1504 lm	2850 lm	2910 lm	3159 lm	4545 lm	4725 lm	5580 lm	
<b>Efficacy</b>	76 lm/W	86 lm/W	100.29 lm/W	95 lm/W	97 lm/W	105.29 lm/W	101 lm/W	105 lm/W	123.96 lm/W	
<b>Volt Amps</b>	14.74 VA	14.86 VA	15.05 VA	29.16 VA	29.11 VA	28.70 VA	45.68 VA	44.84 VA	45.19 VA	
<b>Color Temperature</b>	2700K	3000K	5000K	2700K	3000K	5000K	2700K	3000K	5000K	
<b>CRI</b>	70	70	70	70	70	70	70	70	70	
<b>Equivalent</b>	50W MH	50W MH	50W MH	100W MH	100W MH	100W MH	150W MH	150W MH	150W MH	

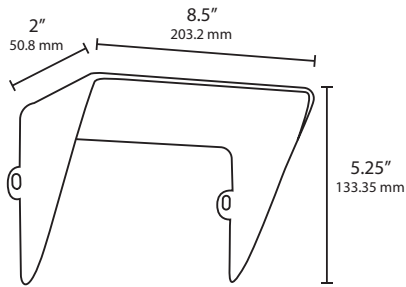

490676 2" Large Shroud

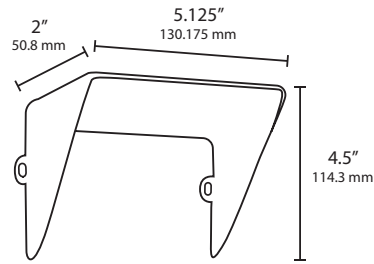


490672 2" Medium Shroud

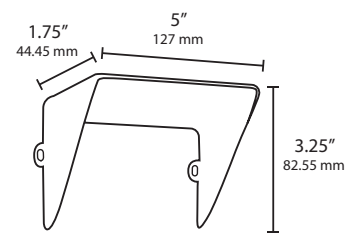


490667 2" Small Shroud




With optional 2" shroud.

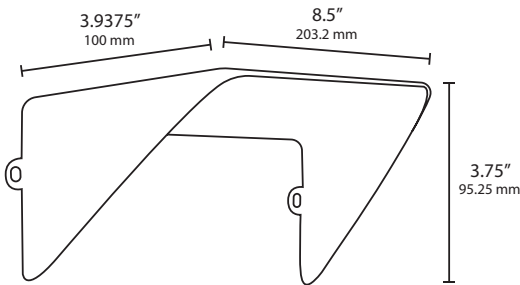

490700 4" Large Shroud

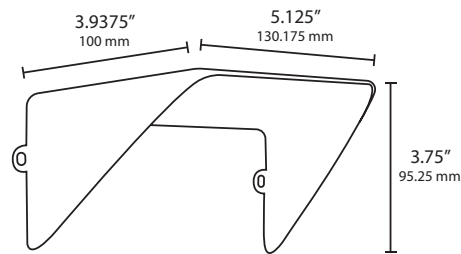

490699 4" Medium Shroud

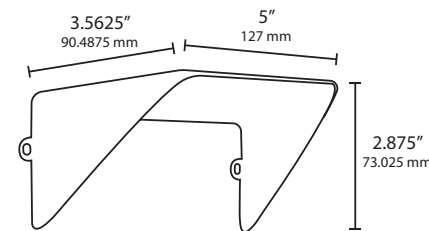

490698 4" Small Shroud



With optional 4" shroud.