

Type:

Model:

LED Mini Flood Light

SPECIFICATIONS

VOLTAGE:

120 to 277V 50/60Hz (12V models also available)

HOUSING:

Sealed cast aluminum. Shroud must be purchased separately.

FINISH:

Architectural bronze. Custom powder coated colors available.

MOUNTING:

Threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes.

WIRING:

Pre-wired five-foot 18/2 SPT1 lead.


WARRANTY:

Ten Years.



Ideal for applications such as landscape lighting, moon lighting, architectural wall washing and sign lighting. 10kV/10kA surge protection. 150° (7H x 7V) beam. Optional shroud available. Shrouds must be ordered separately.

DIMENSIONS:

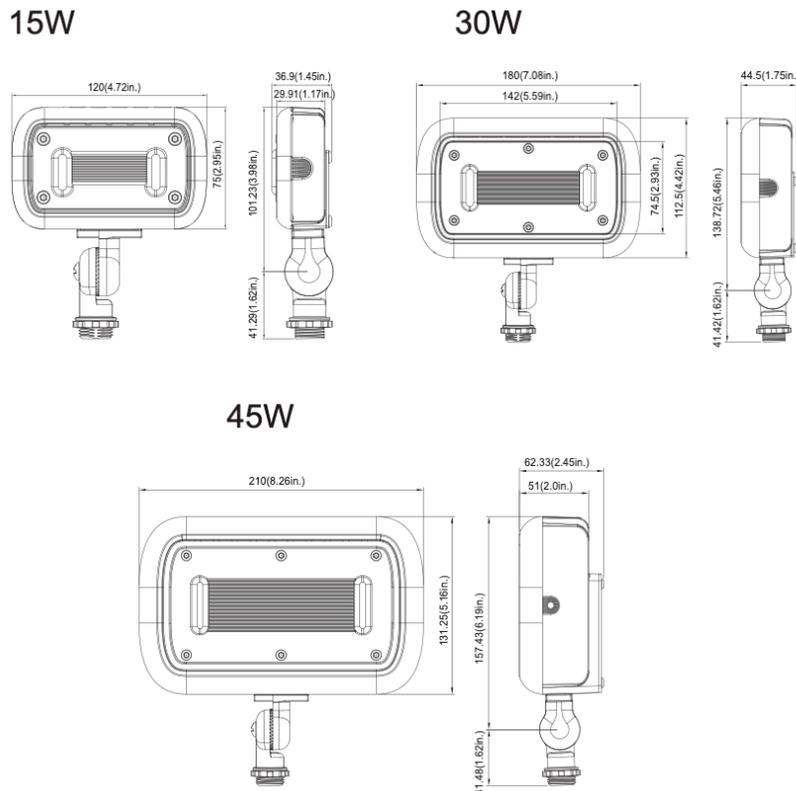

LED LAMP SPECIFICATIONS

LAMP TYPE:

Integrated LED.

OPTICS:

Integral optics providing available beam spreads 150° (7H x 7V) beam.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 3000K, 4000K or 5000K.

FIXTURE ORDERING INFORMATION

To order a fixture, select the appropriate choice from each column as in the following example:

EXAMPLE: 490693



Model	490693	490673	490695	490674	490675	Mounting
Description	LED-MF-15W-3000K-120/277	LED-MF-15W-5000K-120/277	LED-MF-30W-3000K-120/277	LED-MF-30W-5000K-120/277	LED-MF-45W-5000K-120/277	MS Composite stake (incl.) 490034
Wattage	15W	15W	30W	30W	45W	ATM Aluminum Tapered Surface Mount - 490187
Lumens	1290 lm	1504 lm	2910 lm	3159 lm	5580 lm	AGM Aluminum Gutter Mount - 490188
Efficacy	86 lm/W	100.29 lm/W	97 lm/W	105.29 lm/W	123.96 lm/W	AR6 Aluminum 6-In Riser - 490181
Volt Amps	14.86 VA	15.05 VA	29.11 VA	28.70 VA	45.19 VA	AR12 Aluminum 12-In Gutter Mount - 490182
Color Temperature	3000K	5000K	3000K	5000K	5000K	AR24 Aluminum 24-In Gutter Mount - 490183
CRI	70	70	70	70	70	
Equivalent	50W MH	50W MH	100W MH	100W MH	150W MH	