

Type:

Model:

RETRO-LOGIC Direct Wire LED Tube

Retro-Logic LED tubes are a direct replacement for four-foot fluorescent tubes. They connect directly to a two-wire line supply with no ballast. No mercury. No glass. Instant on-and-off. Highly efficient. Flicker-free.

SPECIFICATIONS

LENGTH: 48 in.

BODY: Shatterproof frosted plastic. 1" diameter.

SOCKET BASE: G13 (socket must be non-shunted)

INPUT VOLTAGE: 120-277V 50/60 Hz

WATTAGE: 15W or 18W

CHIPS: Epistar SMT2835 (96 diodes)

BEAM SPREAD: 270°

DRIVER EFFICIENCY: 90%+

CRI: 80+


POWER FACTOR: .90+

AGENCY LISTINGS: UL approved. RoHS compliant. CE and DLC approved.

WARRANTY: 5 years



Direct installation in a new circuit.
You can directly install a Retro-Logic tube in a fixture with no ballast. UL approved.

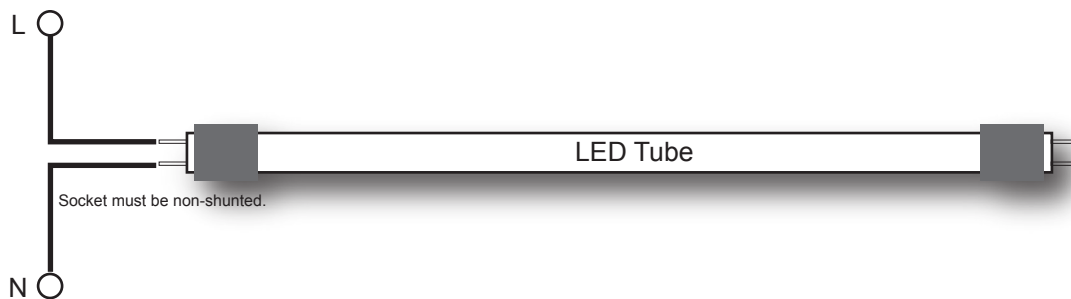

CODE	DESCRIPTION	LENGTH	WATTAGE	COLOR TEMP.	LUMENS	EFFICACY	NO. OF LEDS
487458	LED-4T8-DW-18W-4000K-FR-120/277V	48"	18W	4000K	2000	111 lm/W	96
487459	LED-4T8-DW-15W-5000K-FR-120/277V	48"	15W	5000K	1900	126 lm/W	96