

Type:

Model:

ICON LED MR16 Uplight Fixture

ORDERING CODE:

490001

490001-FS (floating socket)

SPECIFICATIONS

HOUSING:

Cast brass. Lock-and-load shroud with threaded O-rings.

FINISH:

Weathered brass. Custom powder coated colors available.

LENS:

Tempered glass convex lens.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket with stainless steel retaining springs.

LAMP TYPE:

12V MR16. LED recommended. 35W halogen or 7W LED maximum.

MOUNTING:

Stem threaded with 1/2" NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories.

WIRING:

Pre-wired with 5' pigtail of 18/2 cable.


WARRANTY:

Lifetime.



The decoratively ribbed Icon uplight is cast from solid brass. Its tempered glass convex lens casts a gentle, even light. The "lock-and-load" shroud features double O-rings for durability.

DIMENSIONS:

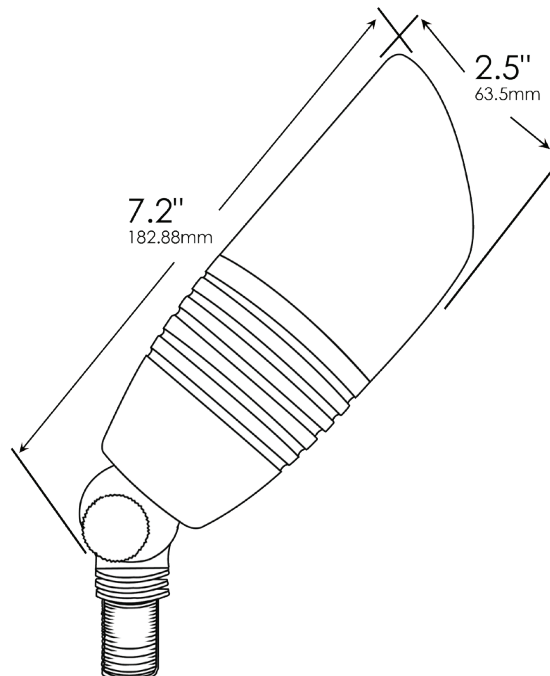

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 60°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490001-4W-25-2700K-MS-R2



| FIXTURE | | LAMP | | MOUNTING | RISER | |
|---|-----------------------|-----------------------|---------------|--|-------------------------------------|-----------------------------------|
| 490001 490001-FS (floating socket) | WATTAGE | BEAM SPREAD | COLOR TEMP. | MS Composite stake (incl.) 490034 | R2 2" brass riser 490038 | |
| | 2W | 25° / 40° / 60° | 2700K / 3000K | M3 Trident Heavy-Duty 3-Prong Stake 490036 | R3 3" brass riser 490039 | |
| | 3W | 25° / 40° / 60° | 2700K / 3000K | PM Round pier mount 490057 | R6 6" brass riser 490031 | |
| | 4W | 25° / 40° / 60° | 2700K / 3000K | MR Round tapered 3-hole surface mount 490048 | R12 12" brass riser 490032 | |
| | 5W | 15° / 25° / 40° / 60° | 2700K / 3000K | MP PVC/Brass post stake 490037 | GM Brass gutter mount 490047 | R24 24" brass riser 490033 |
| | | | 25° | | | |
| | 5W | 38° | Purple | RMP Round Brass Electrical Mounting Plate - 490043 | | |
| | 6W | 25° / 40° / 60° | 2700K / 3000K | REP Retangular Brass Electrical Mounting Plate - 490044 | | |
| 7W | 15° / 30° / 45° / 60° | 2700K / 3000K | | | | |