

### SPECIFICATION SHEET

Type:

Model:

# ATLANTIS Wildlife Safe LED Bi-Pin Path Light

#### **ORDERING CODE:**

490019

#### **SPECIFICATIONS**

#### **HOUSING:**

Spun brass.

#### FINISH:

Weathered brass. Custom powder coated colors available.

#### LENS:

Frosted acrylic

#### **SOCKET/LAMP HOLDER:**

One fixed ceramic bi-pin socket in stem accepts bi-pin lamps with G4 or GY6.35 bases.

#### **LAMP TYPE:**

12V encapsulated LED bi-pin. Halogen 35W maximum or 6W LED maximum.

#### **MOUNTING:**

1/2" NPT. Heavy-duty composite stake included with stem. May be mounted into threaded hubs in junction boxes or other mounting accessories.

#### WIRING:

Pre-wired with 5' pigtail of 18/2 cable.


#### **WARRANTY**:

Lifetime.



The Atlantis path light features a 4-inch-diameter spun brass hat. Its underside is a powder-coated reflective white surface. Frosted acrylic lens ensures water and bug resistant operation.

#### **DIMENSIONS:**

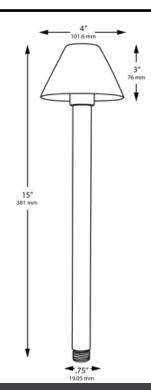



## SPECIFICATION SHEET Page 2 ATLANTIS Wildlife Safe LED Bi-Pin Path Light

LED LAMP SPECIFICATIONS

LAMP TYPE:

Dauer encapsulated bi-pin with 5-year warranty.

**COLOR TEMPERATURES:** 

Wildlife-approved, amber and red.

These fixtures are only deemed wildlife approved if they utilize a wildlife-approved amber or red bulb as per the chart below.



To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490019-490025-487123-WL-MS



| FIXTURE | STEM  |           |          | LAMP             |         |                 | MOUNTING   |
|---------|---|-----------|----------|------------------|---------|-----------------|--|
| 490019  | 490025<br>(10")<br>490023<br>(16")<br>490026<br>(18") | ORDER NO. | COLOR    | DESCRIPTION      | WATTAGE | NANOMETER RANGE | <b>MS</b> Composite stake (incl.) 490034 <b>M3</b> Trident Heavy-Duty 3-Prong Stake 490036 |
|         |   | 487123-WL | Amber-WL | Encap. Bi-pin G4 | 4W      | 585-595         |  |
|         |   | 487120-WL | Red-WL   | Bi-pin G4        | 3W      | 610-645         | PM Round pier mount 490057   |
|         |   |           |          |                  |         |                 | <b>MR</b> Round tapered 3-hole surface mount 490048  |
|         |   |           |          |                  |         |                 | MP PVC/Brass post stake 490037   |
|         | (12)  |           |          |                  |         |                 |  |
|         |   |           |          |                  |         |                 |  |