

Type:

Model:

ARIA II 21" LED MR16 Path Light Fixture

ORDERING CODE:
489917-2XP21

SPECIFICATIONS

HOUSING:
Solid brass. Threaded with O-ring. Watertight and bug-tight.

FINISH:
Weathered brass. Architectural colors and custom powder coated colors available.

LENS:
Clear flat tempered glass.

SOCKET/LAMP HOLDER:
Each head contains one fixed ceramic bi-pin socket with stainless steel retaining springs.




LAMP TYPE:
12V MR16. LED recommended. 30W halogen or 7W LED maximum per head.

MOUNTING:
Stake mount included.

WIRING:
Pre-wired with 5' pigtail of 18/2 cable.

WARRANTY:
Lifetime.

ARCHITECTURAL COLORS:

FINE TEXTURE SILVER	
FINE TEXTURE WHITE	
FINE TEXTURE BLACK	

(489917-2XP21-S)


(489917-2XP21-WH)

(489917-2XP21-BLK)



Standard color is weathered brass (489917-2XP21).
Standard size is 21". Custom sizes are available.

DIMENSIONS:

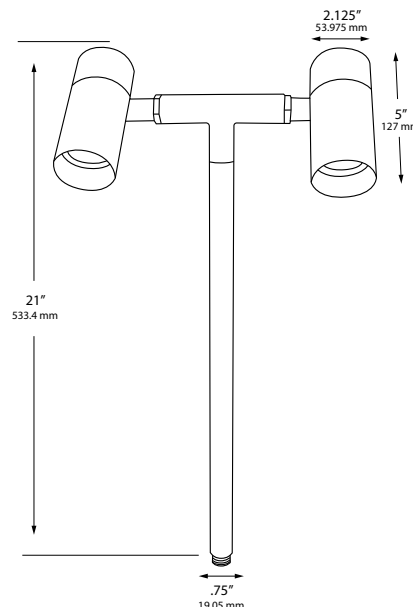

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 120°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489917-2XP21-4W-25-2700K-MS



FIXTURE	LAMP			MOUNTING
	WATTAGE	BEAM SPREAD	COLOR TEMP.	
489917-2XP21 489917-2XP21-S) 489917-2XP21-WH) 489917-2XP21-BLK)	2W	25° / 40° / 60° / 100°	2700K / 3000K	MS Composite stake (incl.) 490034 M3 Trident Heavy-Duty 3-Prong Stake 490036 PM Round pier mount 490057 MR Round tapered 3-hole surface mount 490048 MP PVC/Brass post stake 490037
	3W	25° / 40° / 60°	2700K / 3000K	
	4W	25° / 40° / 60° / 100°	2700K / 3000K	
	5W	15° / 25° / 40° / 60° / 100°	2700K / 3000K	
		25°	Amber / Blue / Green / Red	
	5W	38°	Purple	
	6W	25° / 40° / 60°	2700K / 3000K	
	7W	15° / 30° / 45° / 60° / 120°	2700K / 3000K	