

Type:

Model:

**TORTUGA Path Light Fixture/Citronella Torch**

**ORDERING CODE:**

490028

**SPECIFICATIONS**

**HOUSING:**

Cast brass, integrated citronella tank.

**FINISH:**

Weathered brass. Powder-coated reflective white undersurface.  
Custom powder coated colors available.

**STEMS:**

10" (Model 490025), 18" (Model 490026) and 60" (Model 490027)  
stems are sold separately.

**SOCKET/LAMP HOLDER:**

One fixed ceramic bi-pin socket in stem accepts bi-pin or MR16  
lamps with G4 or GY6.35 bases.

**LAMP TYPE:**

12V bi-pin. LED recommended. Halogen 30W maximum or 7W LED  
maximum.

**MOUNTING:**

Threaded with 1/2" NPT. Heavy-duty composite stake included with  
stem, sold separately. May be mounted into threaded hubs in  
junction boxes or other mounting accessories.

**WIRING:**

Stem (sold separately) is pre-wired with 5' pigtail of 18/2 cable.


**WARRANTY:**

Lifetime.



The cast brass Tortuga pathlight incorporates a citronella tank and wick for tiki torch drama. A brass cap on a chain covers the wick. Powder-coated reflective white undersurface.

**DIMENSIONS:**

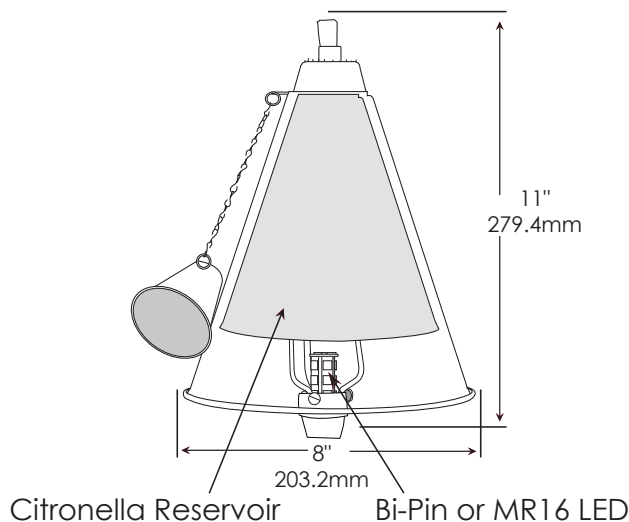

**LED LAMP SPECIFICATIONS**

**LAMP TYPE:**

12V Dauer MR16 lamp or bi-pin with 5-year warranty, dimmable, and suitable for enclosed luminaires.

**OPTICS:**

Integral optics providing available beam spreads from 15° to 120° for MR16 lamp (or no optics for bi-pin lamp).

**COLOR TEMPERATURES:**

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

**FIXTURE ORDERING INFORMATION**

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490028-490028-MR16-4W-2700K-MS



FIXTURE	STEM	LAMP			MOUNTING
		WATTAGE	BEAM SPREAD	COLOR TEMP.	
490028	490025 (10")	MR16 2W	25° / 40° / 60° / 100°	2700K / 3000K	<b>MS</b> Composite stake (incl. with stem) 490034 <b>M3</b> Trident Heavy-Duty 3-Prong Stake 490036 <b>PM</b> Round pier mount 490057 <b>MR</b> Round tapered 3-hole surface mount 490048 <b>MP</b> PVC/Brass post stake 490037 (included with the 60" stem)
		MR16 3W	25° / 40° / 60°	2700K / 3000K	
	490026 (18")	MR16 4W	25° / 40° / 60° / 100°	2700K / 3000K	
		490027 (60")	MR16 5W	15° / 25° / 40° / 60° / 100°	
	25°			Amber / Blue / Green / Red	
	MR16 5W	38°	Purple		
	MR16 6W	25° / 40° / 60°	2700K / 3000K		
	MR16 7W	15° / 30° / 45° / 60° / 120°	2700K / 3000K		
	Bi-pin 2W		2700K / 3000K		
	Bi-pin 3W		2700K / 3000K		
	Bi-pin 3.3W		Amber / Blue / Green / Red		
	Bi-pin 4W		Amber		
	Bi-pin 4W		2700K / 3000K		
	Bi-pin 4W		2700K-HO / 3000K-HO		