

Report No.:

Test Time: 2020-11-6 14:24

Luminaire Property

Luminaire Manufacturer:

Luminaire Description: MLS0210W12V27KD60 (不帶帽沿CXM-7-27-80, 10.71W, 二次)

Lamp Catalog: CXM-7-27-80-36

Lamp Description: DDC10WB12S-230

Voltage: 11.9 V

Current: 0.981 A

Power: 10.53 W

Power Factor: 0.904

Volt Amps: 11.70 VA

Photometric Results

CIE Class: Direct

Total Rated Lamp Lumens: 653.5 lm

Measurement Flux: 653.5 lm

Efficiency: 100%

Downward Ratio: 99%

Upward Ratio: 1%

Horizontal Diffuse Angle(10%,50%,75%,100%): H83.1,H50.2,H32.9,H1

Vertical Diffuse Angle(10%,50%,75%,100%): V83.6,V50.4,V33,V1

Luminaire Efficacy Rating (LER): 62.11

Central Intensity: 847.32 cd


Max. Intensity: 849.44 cd

Pos of Max. Intensity: H60 V0


S/MH(C0/C180): 0.78

S/MH(C90/C270): 0.78

Picture Of Luminaire



Luminous Intensity Distribution Curve

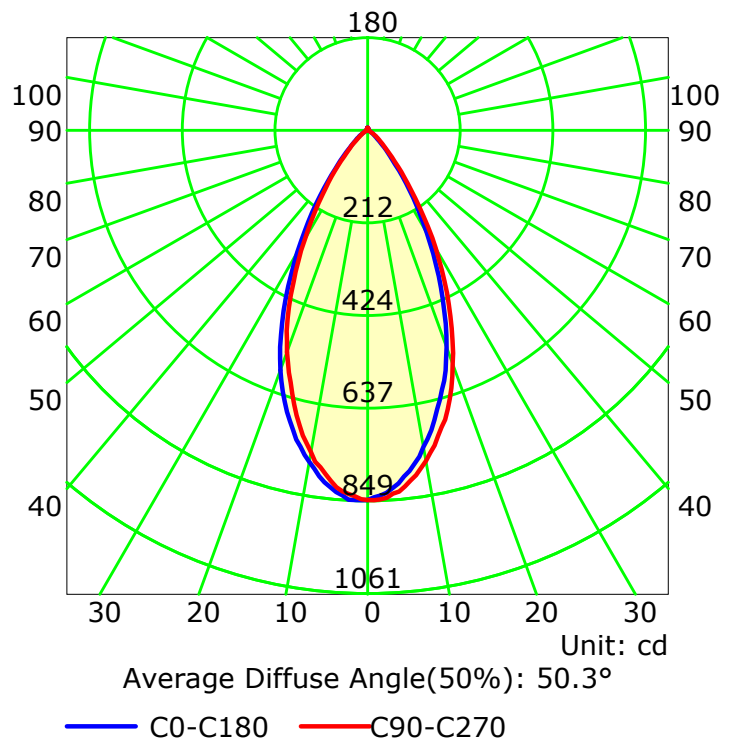

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:


Luminous Intensity Distribution Curve

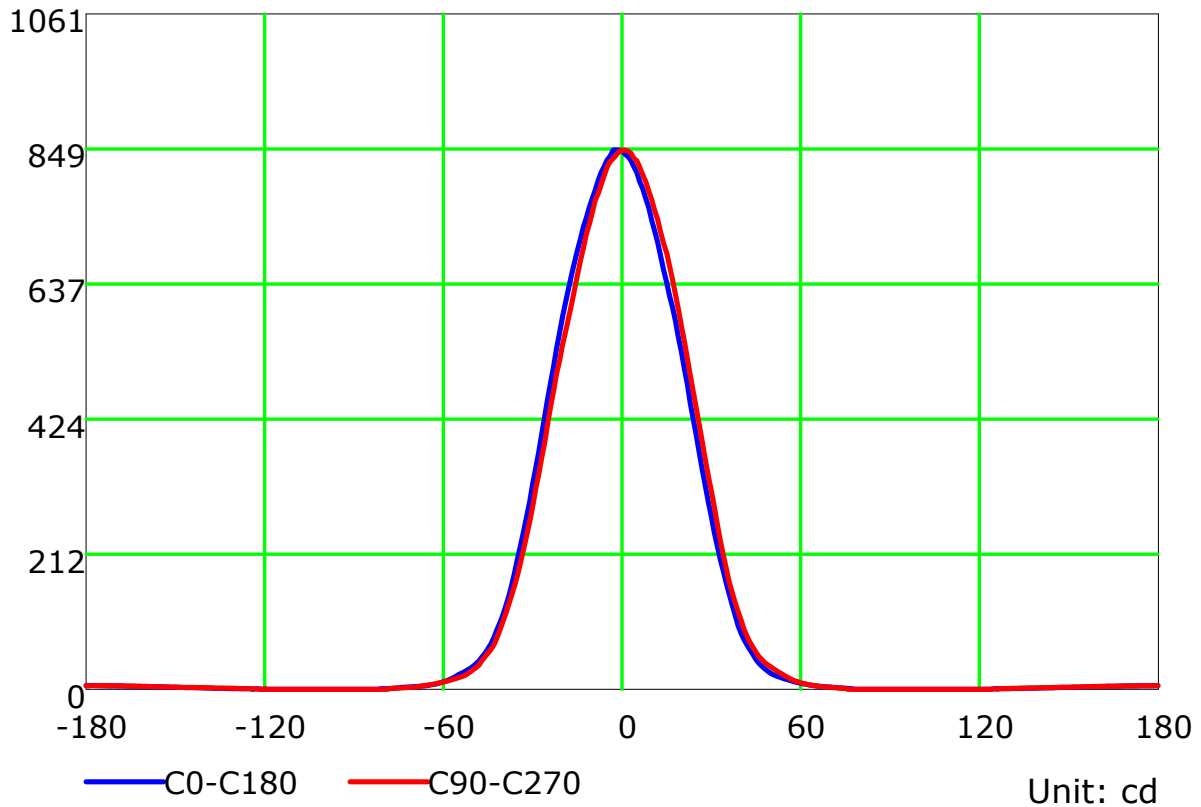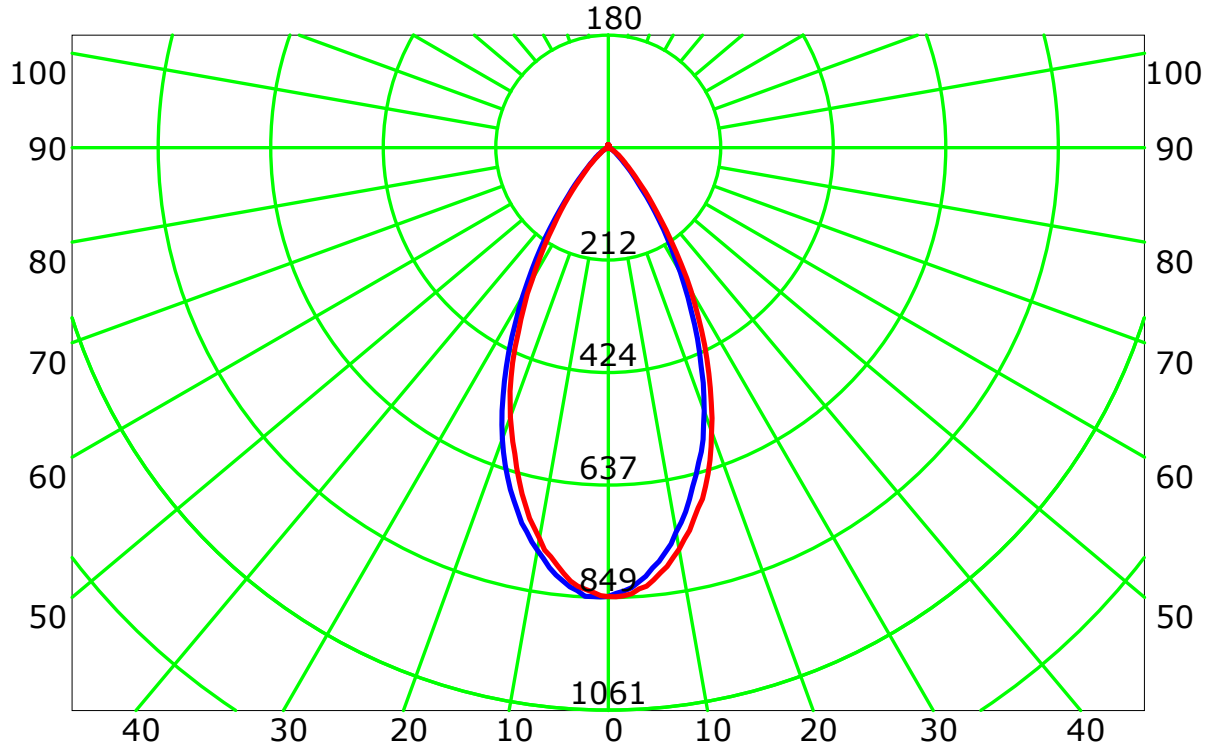

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Luminous Intensity Distribution Curve(cd/klm)

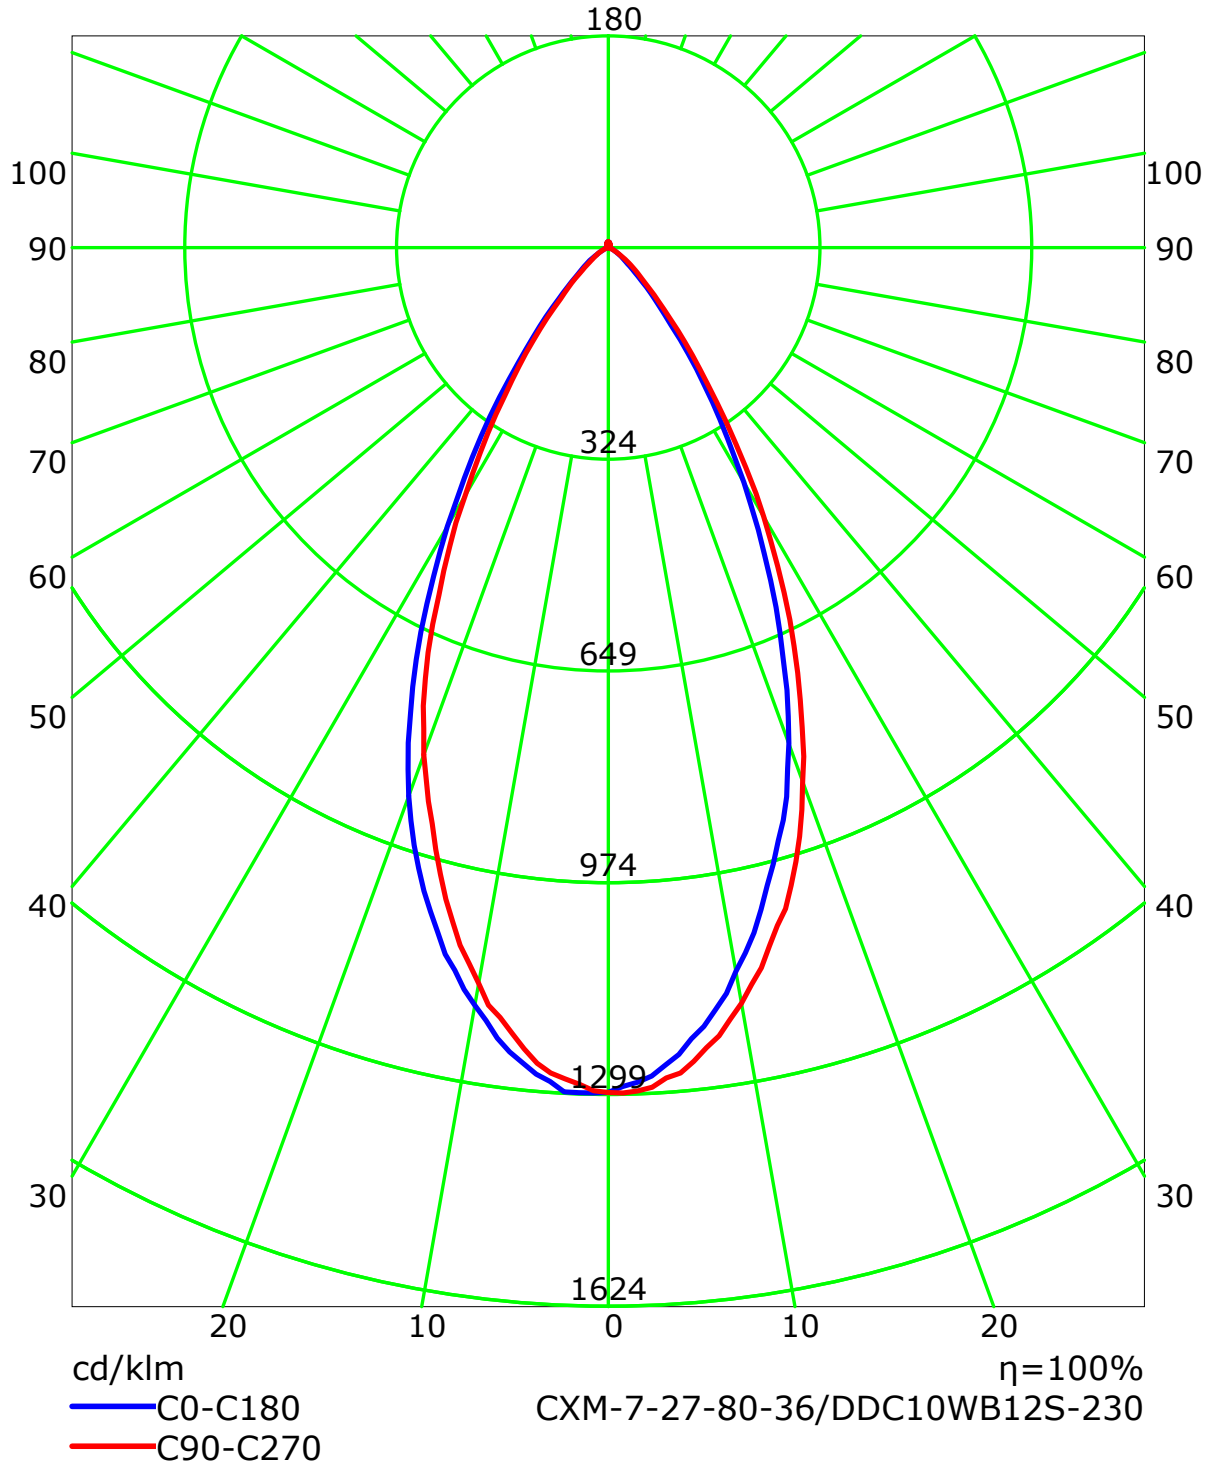


C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	110	110	110	106	106	106	101	101	101	99
1	113	110	108	105	110	108	106	104	104	102	100	100	98	97	96	95	94	92
2	107	102	98	95	105	101	97	94	97	94	91	94	91	89	91	89	87	85
3	102	95	90	86	100	94	89	85	91	87	84	88	85	82	86	83	81	79
4	97	89	83	79	95	88	82	78	85	81	77	83	79	76	81	78	75	74
5	92	83	77	73	90	82	77	72	80	75	72	78	74	71	77	73	70	69
6	87	78	72	68	85	77	71	67	76	71	67	74	70	66	73	69	66	64
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60
8	79	69	63	59	77	69	63	59	67	62	59	66	62	58	65	61	58	57
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53
10	72	62	56	52	71	61	56	52	61	56	52	60	55	52	59	55	52	50


Spacing Criteria (0-180): 0.78
 Spacing Criteria (90-270): 0.78
 Spacing Criteria (Diagonal): 0.79

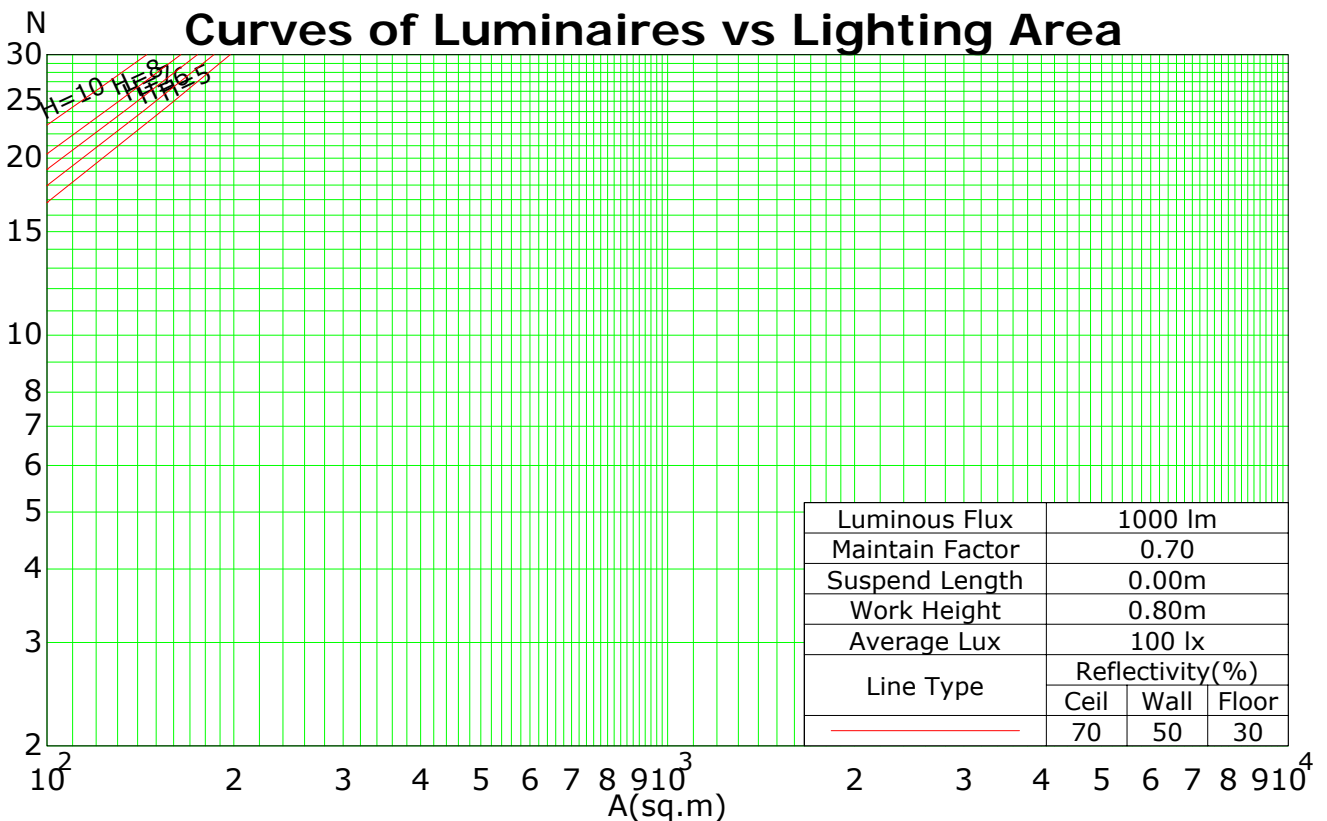

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Isocandela (rectangle)

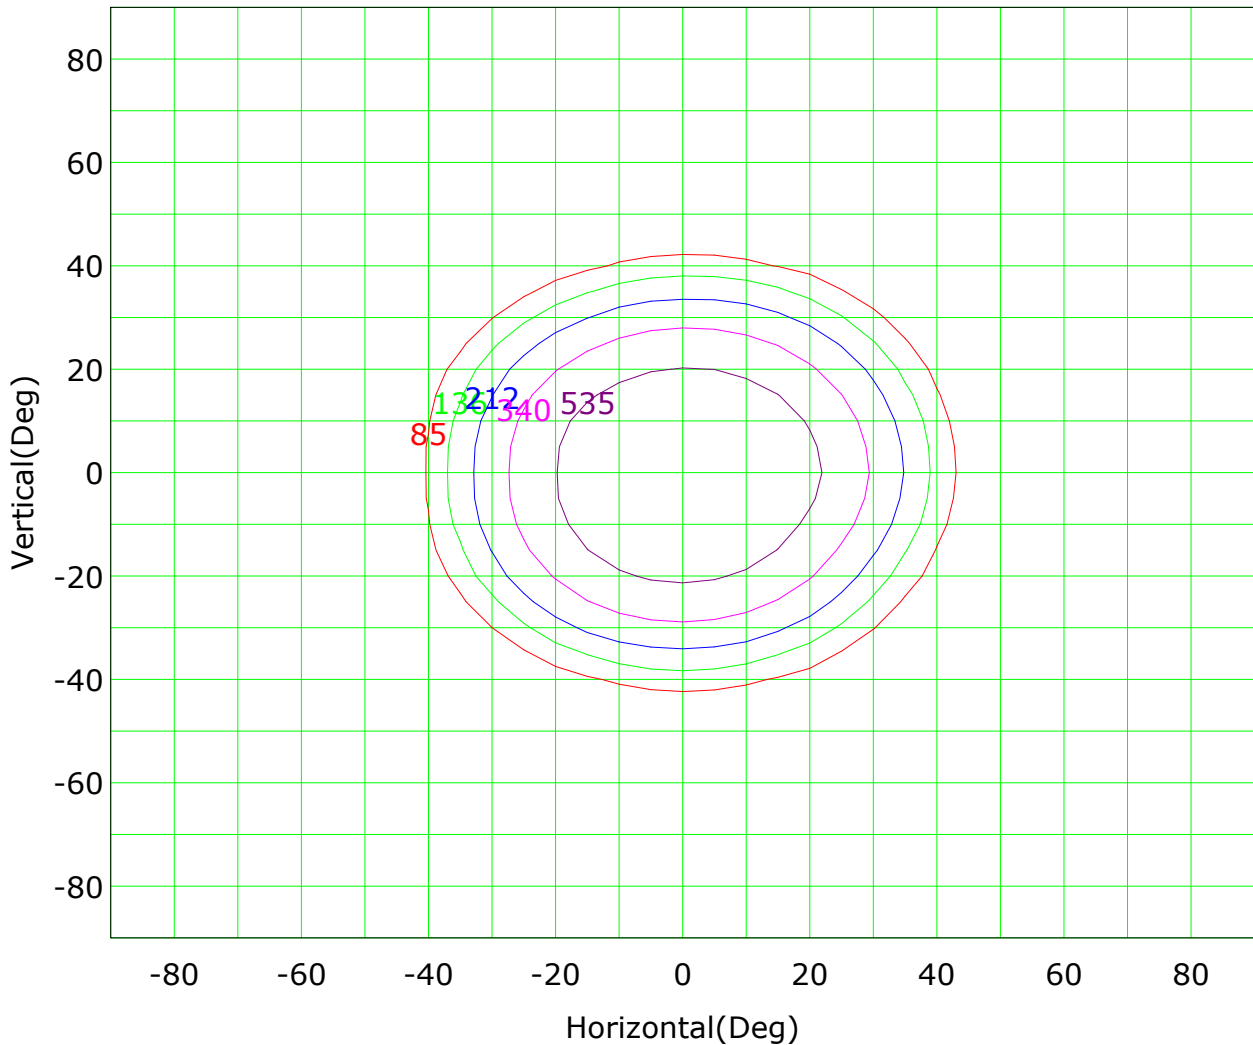


Imax (100%): 849 cd

— (10%):	85 cd	— (16%):	136 cd
— (25%):	212 cd	— (40%):	340 cd
— (63%):	535 cd	— (100%):	849 cd

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Isocandela (sphere)

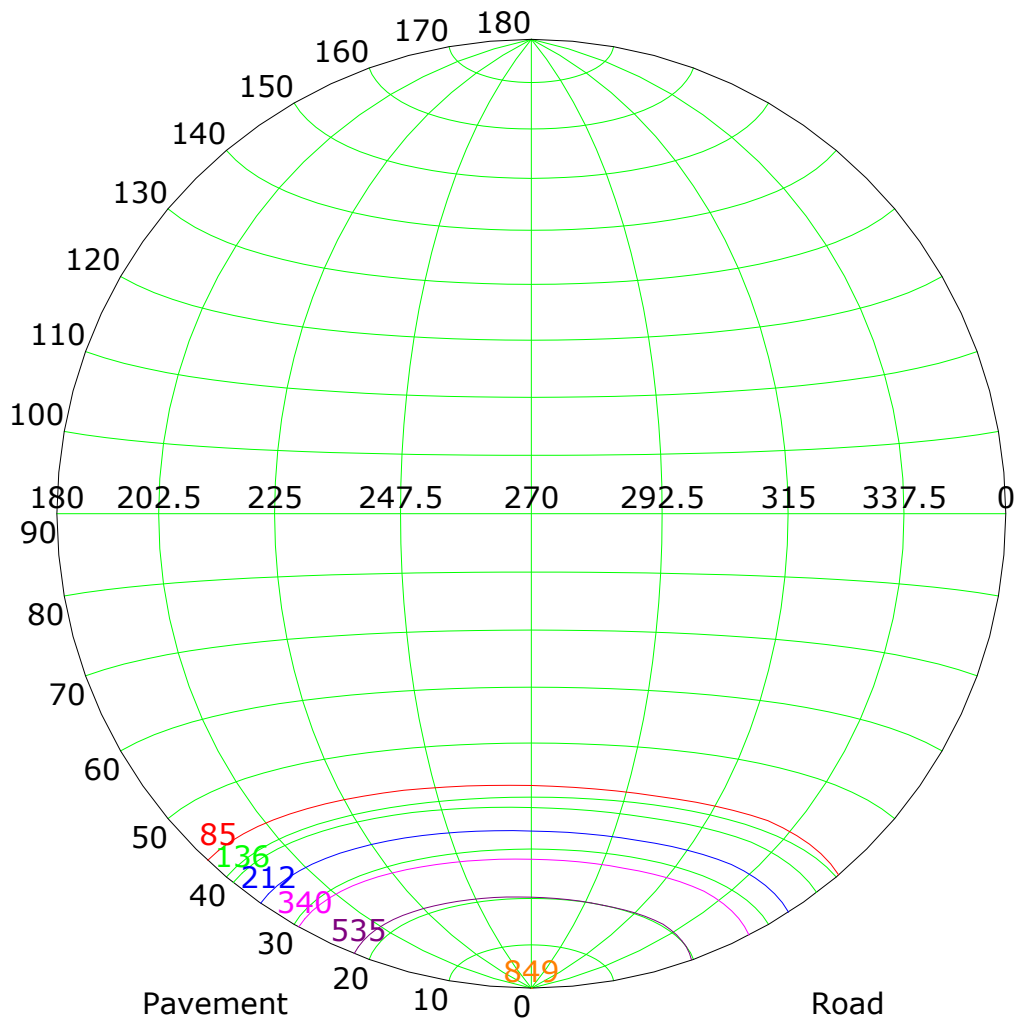

Imax (100%): 849 cd

- | | |
|------------------|------------------|
| — (10%): 85 cd | — (16%): 136 cd |
| — (25%): 212 cd | — (40%): 340 cd |
| — (63%): 535 cd | — (100%): 849 cd |

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

IsoLux Plot

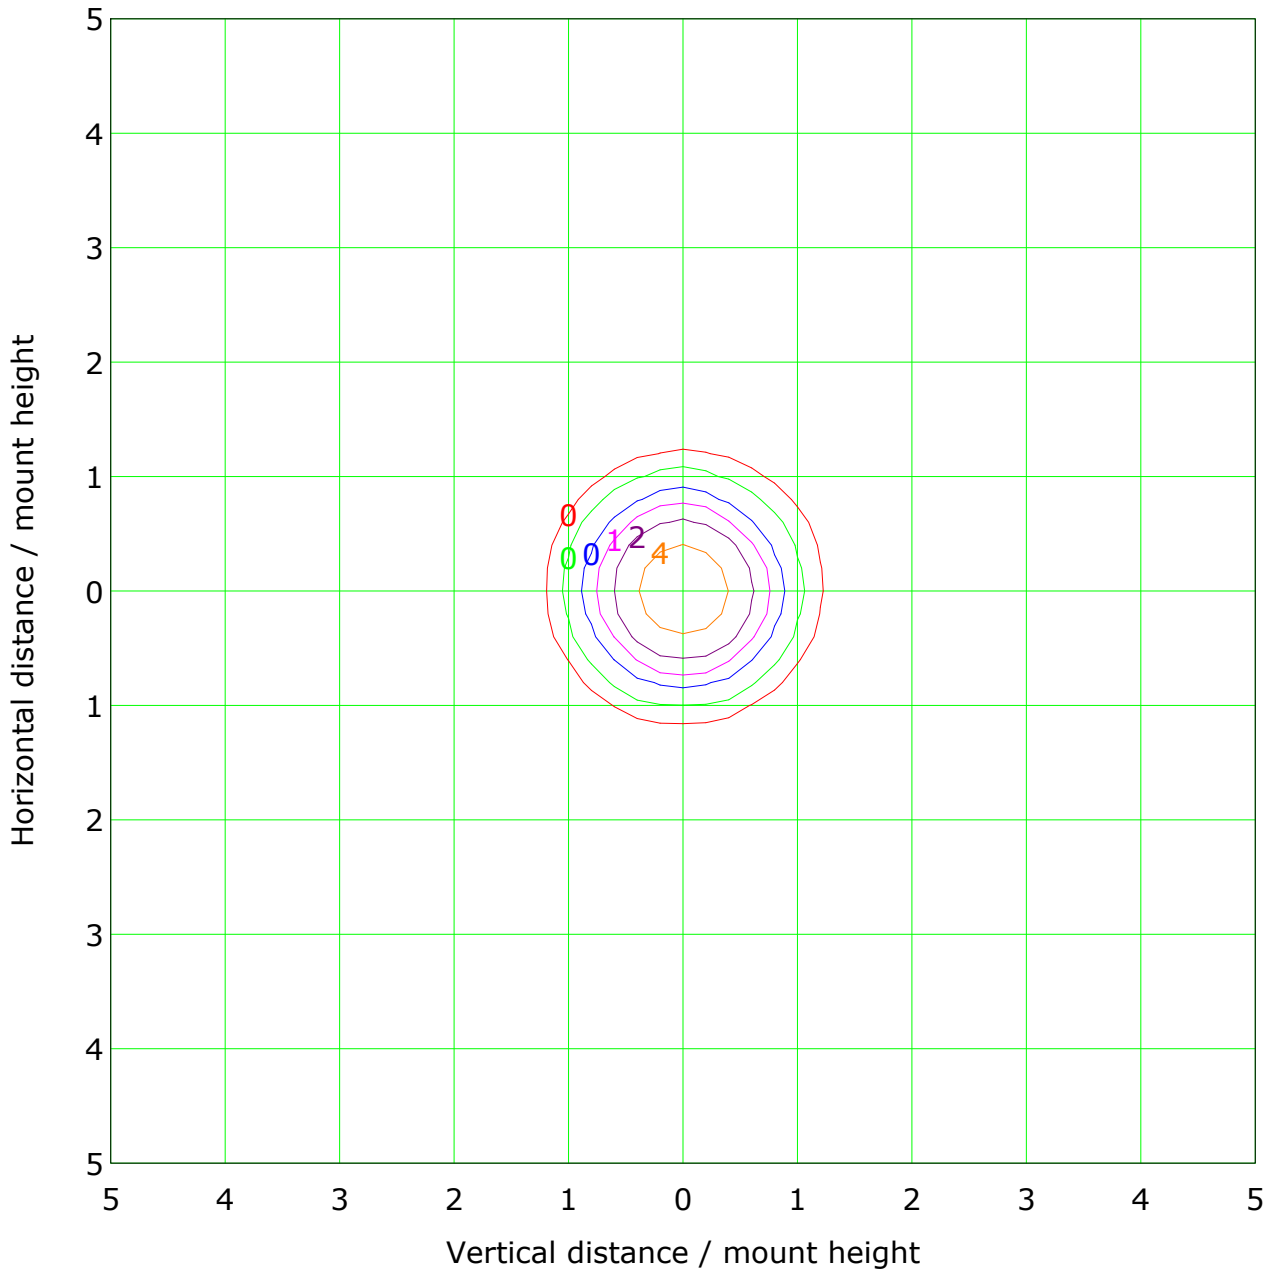


Mounting Height: 10.0m		Max Lux(100%): 8.5 lx	
— (1%):	0.1 lx	— (2%):	0.2 lx
— (5%):	0.4 lx	— (10%):	0.8 lx
— (20%):	1.7 lx	— (50%):	4.2 lx
— (100%):	8.5 lx		

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Roadway CU Curve

Efficiency(%)

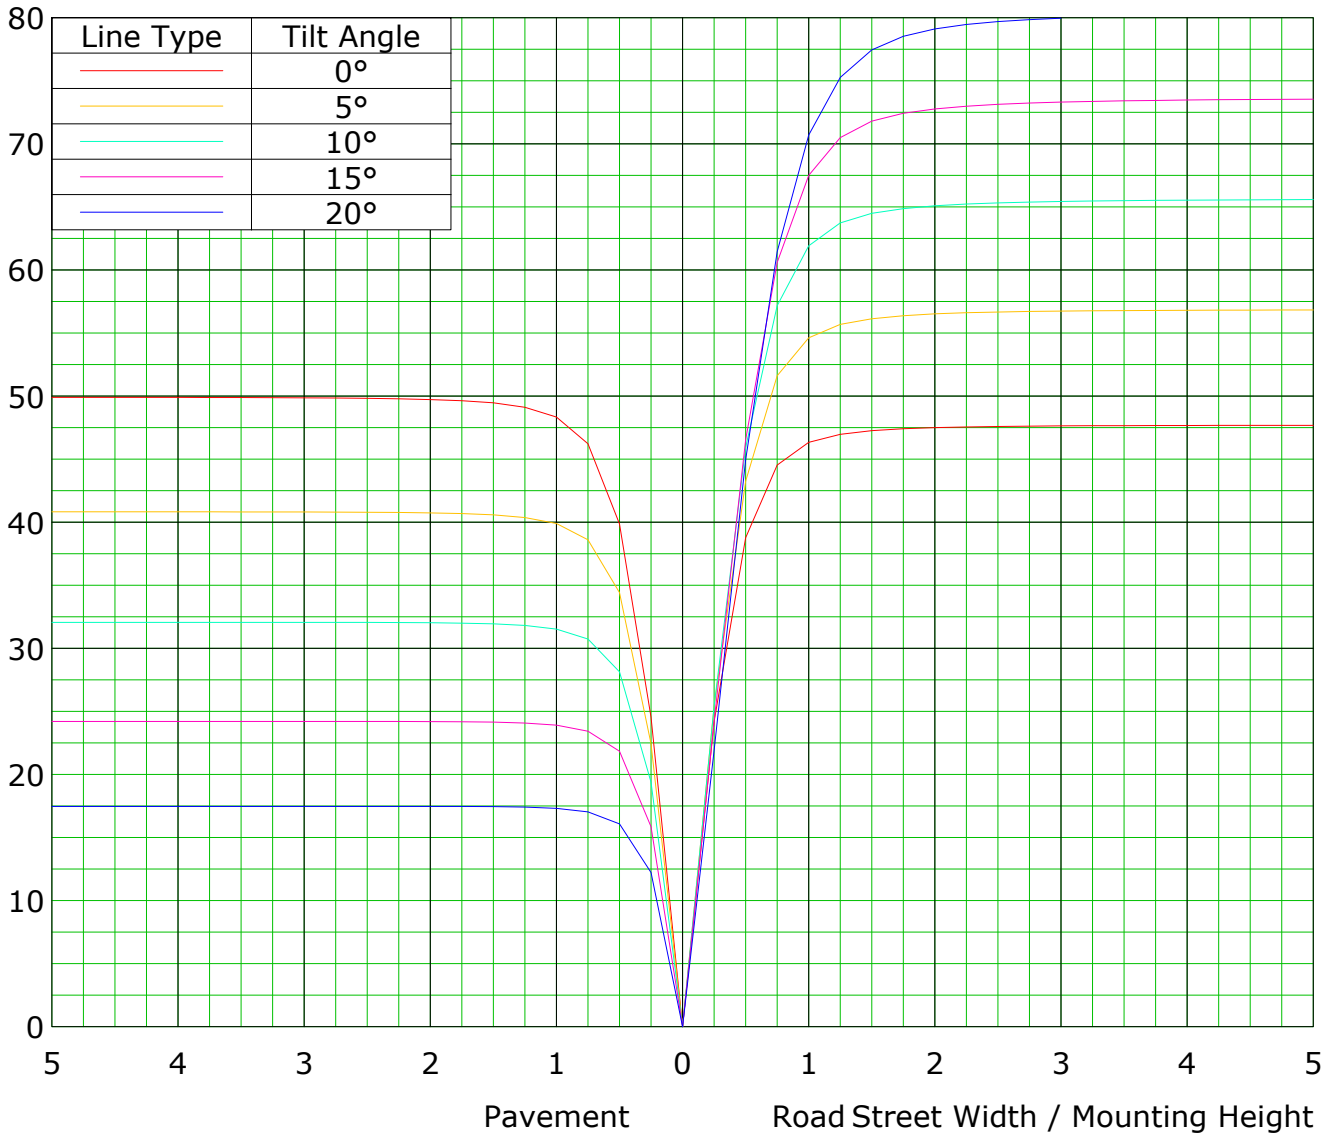



C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

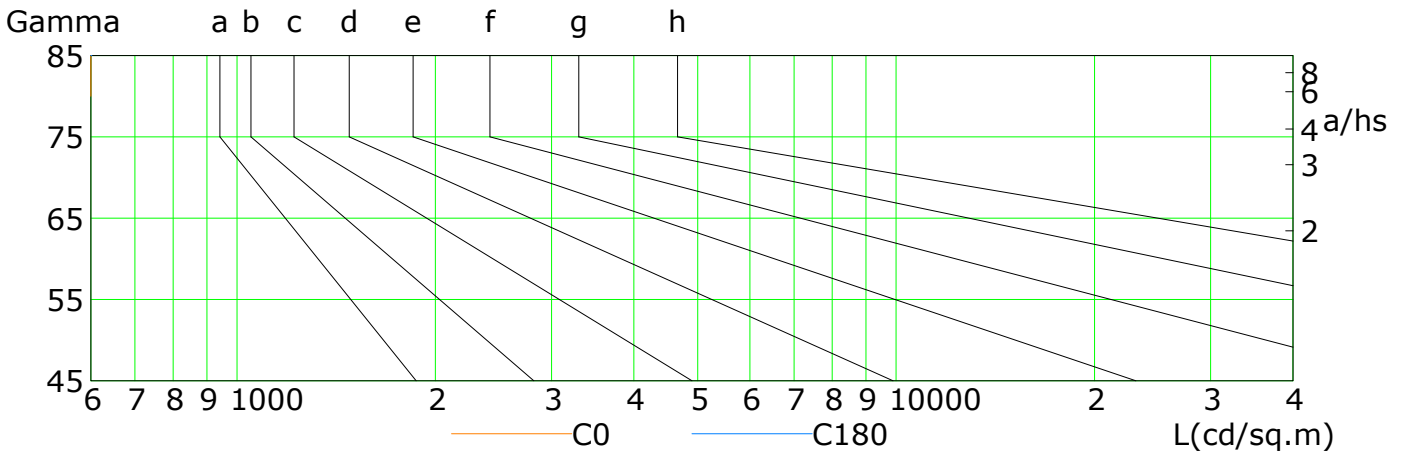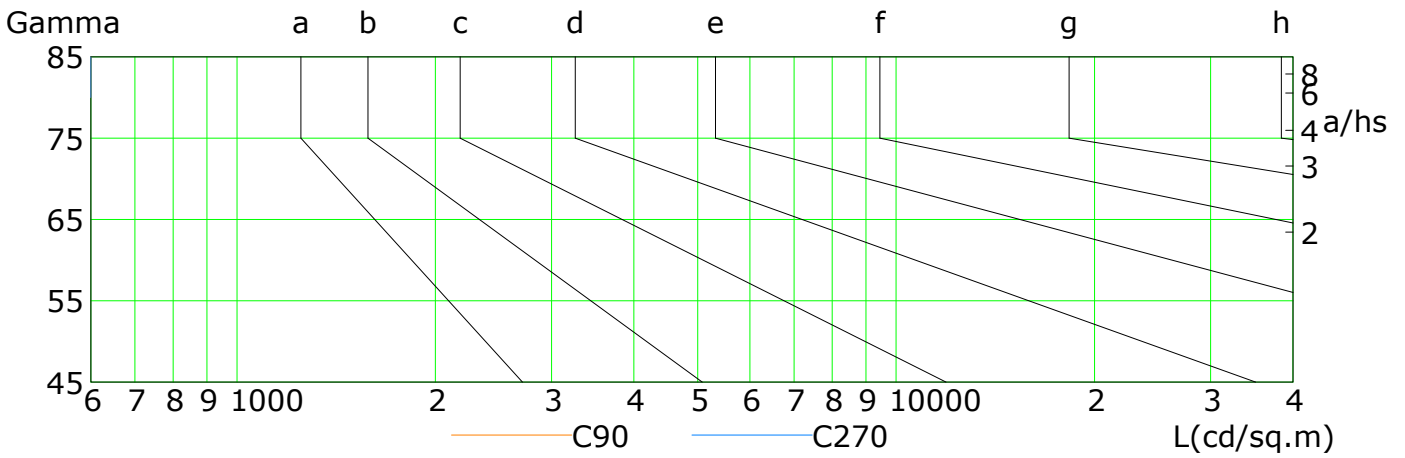

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	47	25	16	10	6	4	2	0	0
C90	58	35	21	10	6	3	1	0	0
C180	64	36	23	12	7	4	3	1	0
C270	57	31	18	12	7	4	2	0	0

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:


Illuminance at a Distance

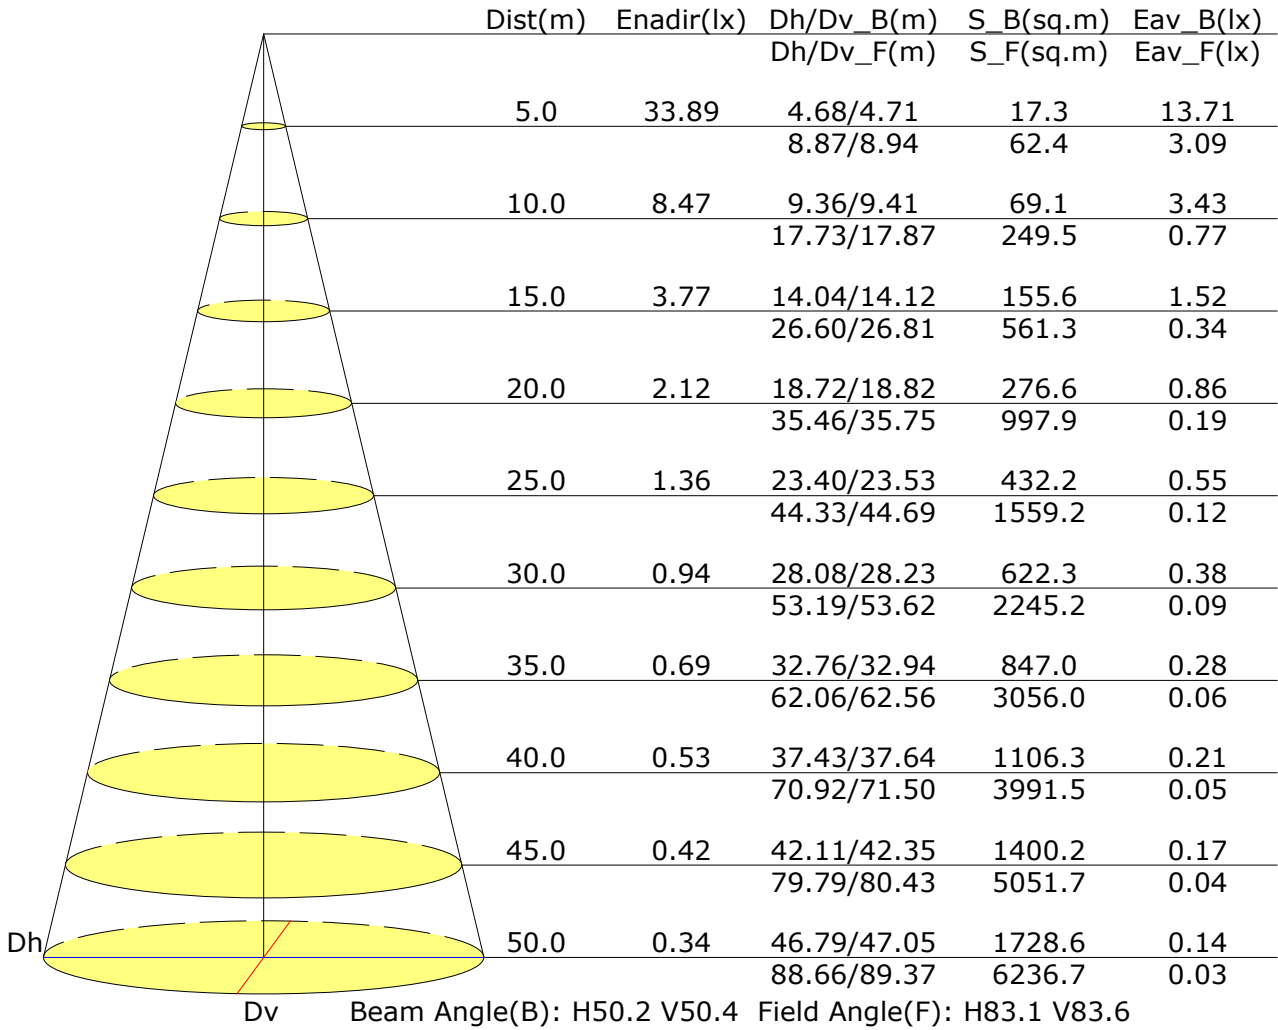

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Vertical IsoLux Plot

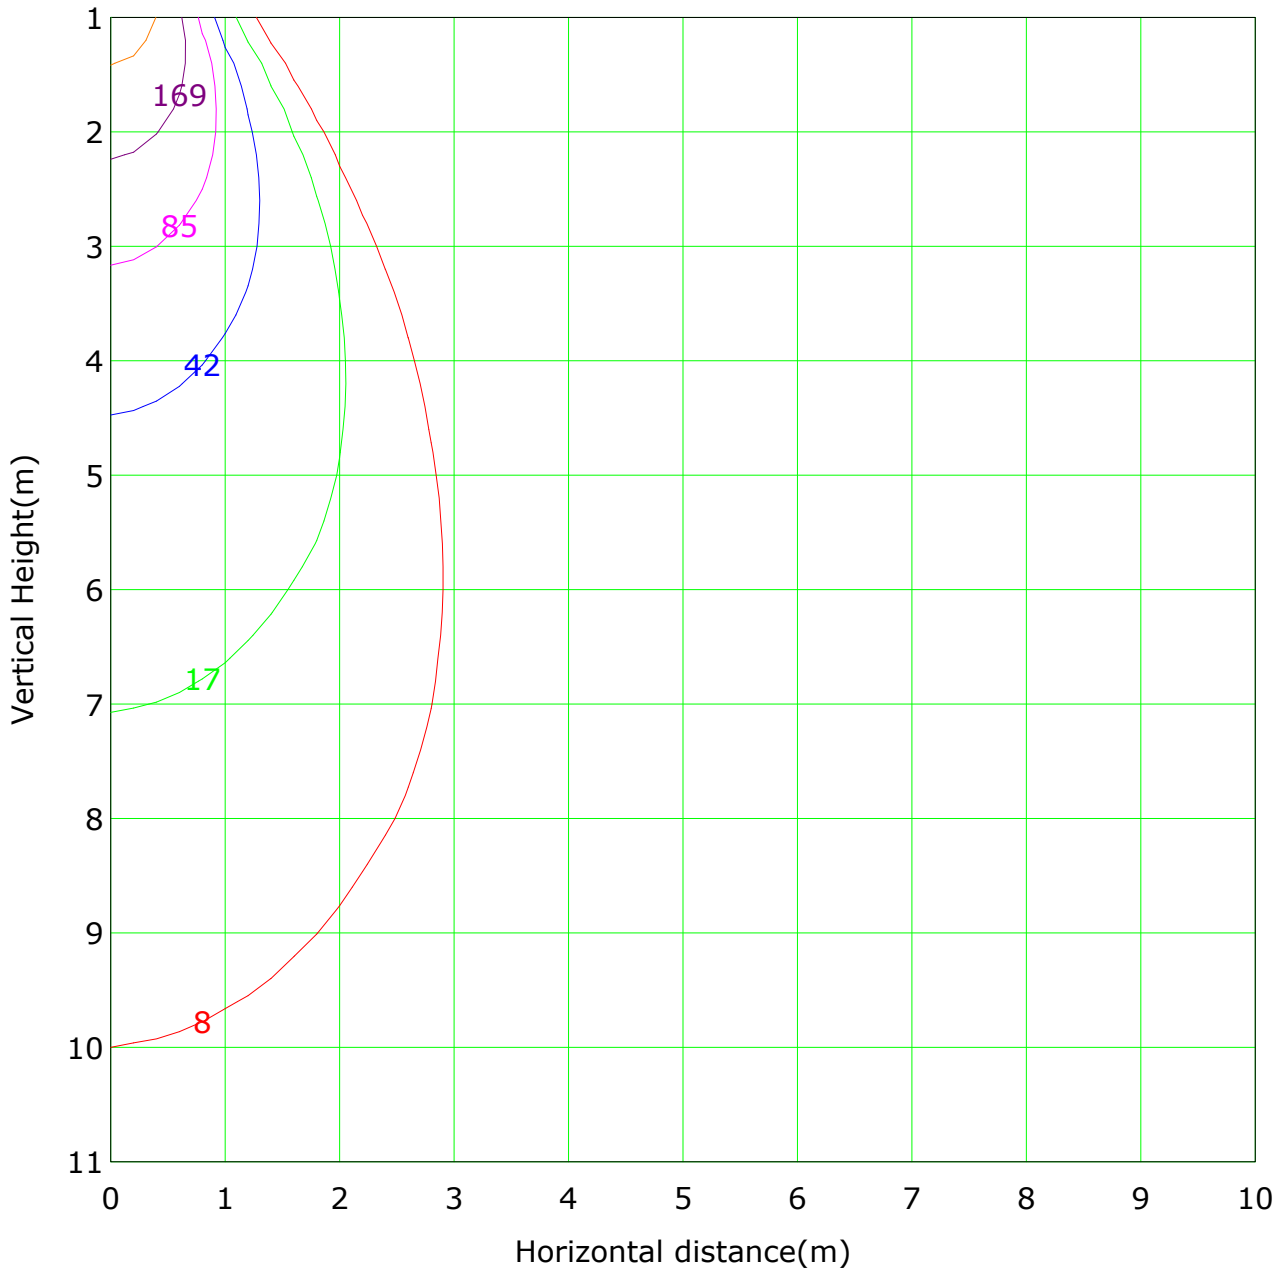

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 847.3 lx

— (1%): 8.5 lx	— (2%): 16.9 lx
— (5%): 42.4 lx	— (10%): 84.7 lx
— (20%): 169.5 lx	— (50%): 423.7 lx
— (100%): 847.3 lx	

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Area Flux Table

Unit: lm


		Vertical plane																				
		-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90		
Flux(E)	Flux(T)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	Flux(E)	Flux(T)
-90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
-10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	585	585
Flux(T)	0.0	0.2	0.7	2.7	8.6	26.1	61.2	102.0	128.8	127.5	98.4	56.6	22.7	7.0	2.3	0.7	0.1	0.0	0.0	0.0	646	646
Flux(E)	0.0	0.0	0.0	0.0	1.3	20.2	56.2	97.4	124.3	123.1	93.9	51.7	16.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	585	585

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

The Average Illuminance Effective Figure

Flux Out: 583.91lm

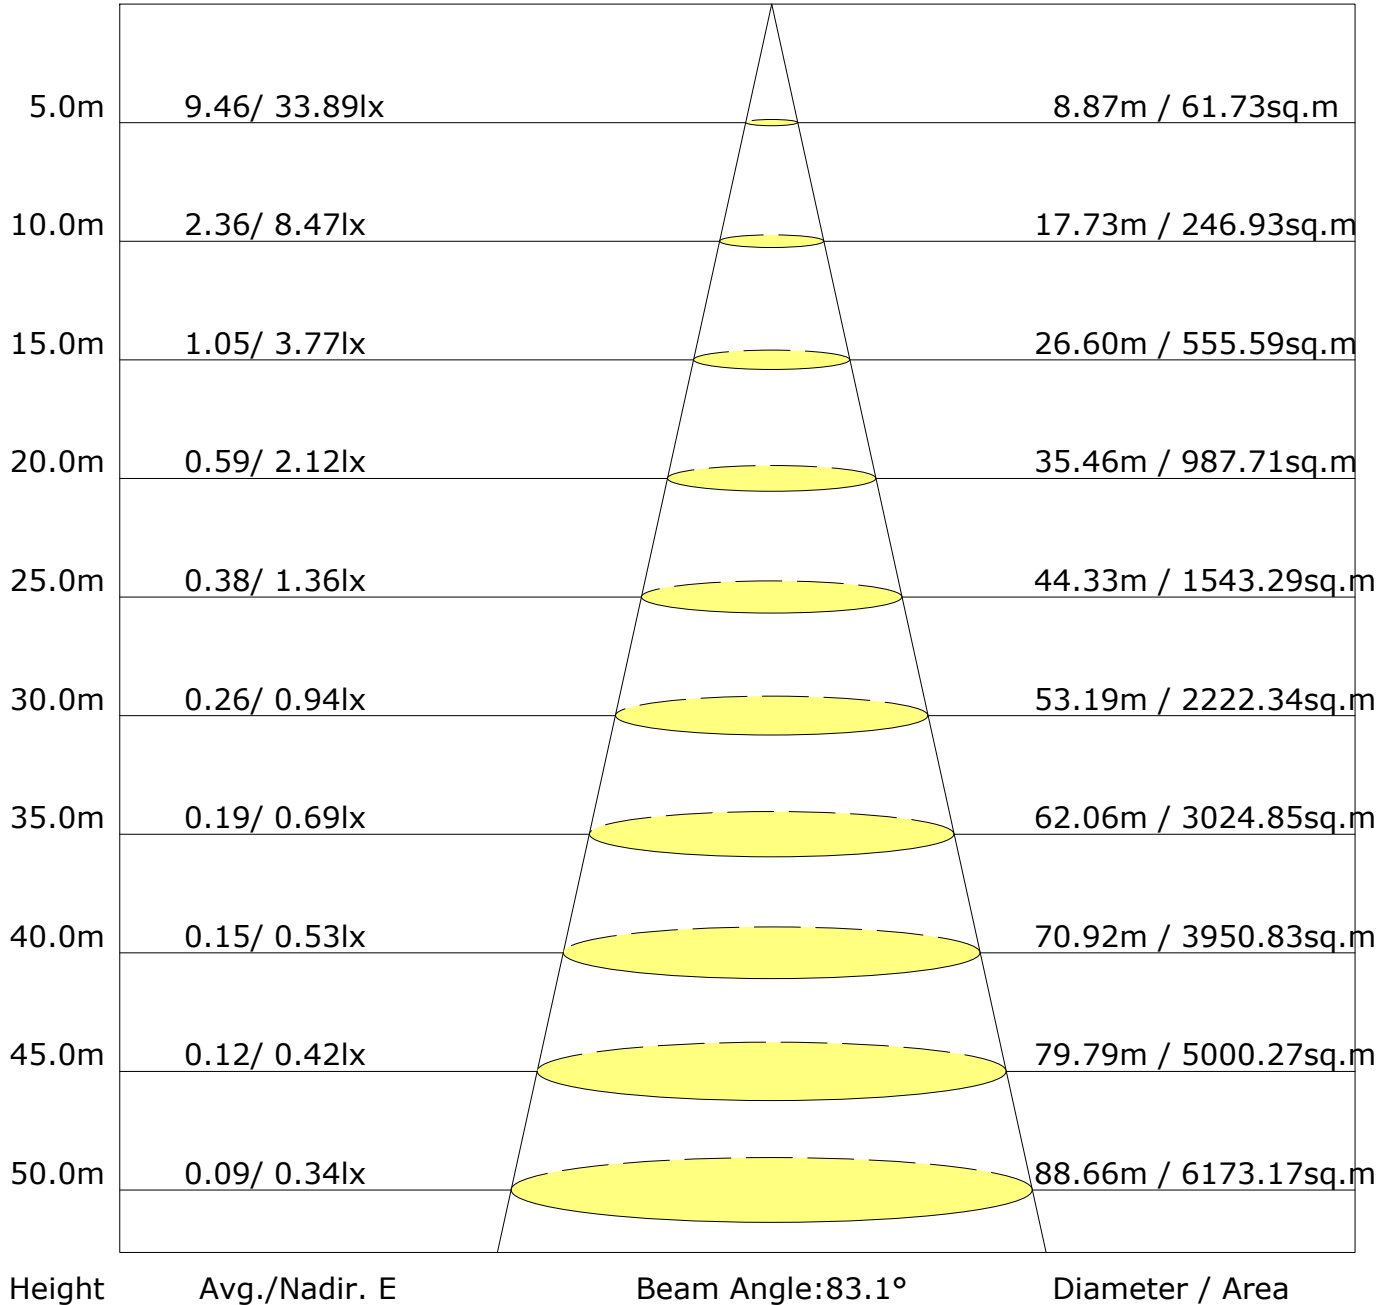

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=4H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=8H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=12H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
Variations with the observer position at spacings:										
S=1.0H	-1.\$/-1.\$					-1.\$/-1.\$				
S=1.5H	-1.\$/-1.\$					-1.\$/-1.\$				
S=2.0H	-1.\$/-1.\$					-1.\$/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with 653lm ($8\log(F/F_0) = -1.5$).

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM


	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	315	48.3
	FL (0°-30°)	225	34.4
	FM (30°-60°)	87	13.3
	FH (60°-80°)	4	0.7
	FVH (80°-90°)	0	0.0
	BACK LIGHT	330	50.6
	BL (0°-30°)	231	35.4
	BM (30°-60°)	95	14.5
	BH (60°-80°)	4	0.7
	BVH (80°-90°)	0	0.0
	UP LIGHT	8	1.2
	UL (90°-100°)	0	0.0
	UH (100°-180°)	8	1.2
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U1 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U1 G0

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

LCS Graph

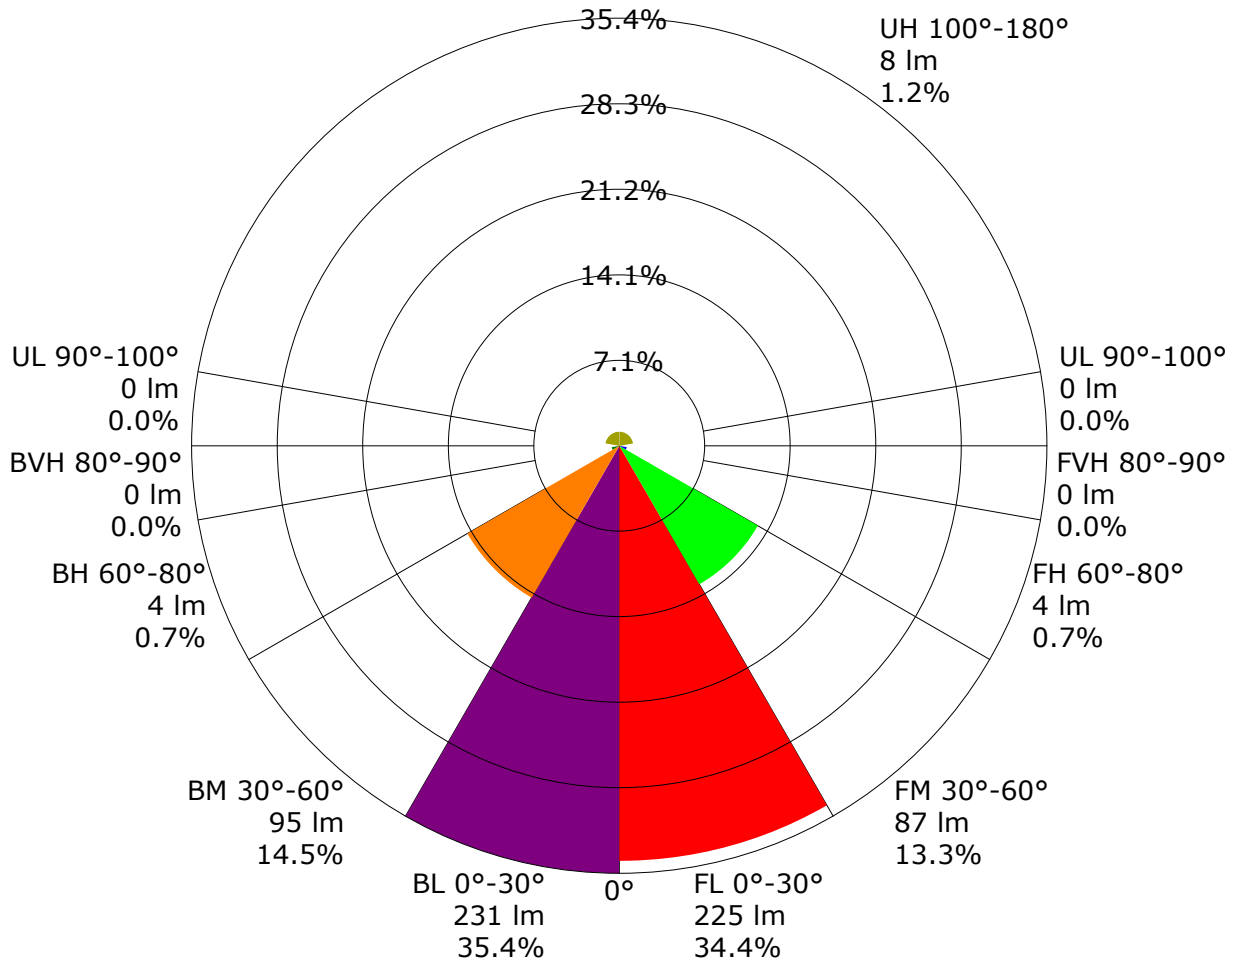

Back Light

Forward Light

Scale= MAX LCS%

Trapped Light:NA,NA

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.81	0.88	0.93	0.97	1.01	1.04	1.06	1.08	1.10	
	0.30		0.76	0.84	0.89	0.92	0.97	1.01	1.03	1.06	1.08	
	0.20		0.73	0.80	0.85	0.89	0.94	0.98	1.01	1.04	1.06	
0.50	0.50	0.20	0.80	0.87	0.91	0.94	0.98	1.01	1.02	1.04	1.06	
	0.30		0.75	0.82	0.87	0.91	0.95	0.98	1.00	1.03	1.04	
	0.20		0.72	0.79	0.84	0.88	0.93	0.96	0.98	1.01	1.03	
0.30	0.50	0.20	0.78	0.85	0.89	0.92	0.95	0.97	0.99	1.01	1.02	
	0.30		0.75	0.81	0.86	0.89	0.93	0.95	0.97	0.99	1.01	
	0.20		0.72	0.79	0.83	0.86	0.91	0.93	0.95	0.98	0.99	
0.00	0.00	0.00	0.70	0.76	0.81	0.84	0.87	0.90	0.91	0.93	0.95	
<p>Rating:11W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>												

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.63	0.51	0.42	0.36	0.28	0.23	0.20	0.15	0.12	
	0.30		0.53	0.43	0.37	0.32	0.26	0.21	0.18	0.14	0.12	
	0.20		0.45	0.38	0.33	0.29	0.23	0.20	0.17	0.13	0.11	
0.50	0.50	0.20	0.60	0.48	0.40	0.34	0.26	0.26	0.18	0.14	0.11	
	0.30		0.51	0.41	0.35	0.30	0.24	0.20	0.17	0.13	0.11	
	0.20		0.44	0.37	0.31	0.27	0.22	0.19	0.16	0.13	0.10	
0.30	0.50	0.20	0.58	0.45	0.37	0.32	0.24	0.20	0.17	0.13	0.10	
	0.30		0.49	0.40	0.33	0.29	0.23	0.19	0.16	0.12	0.10	
	0.20		0.43	0.35	0.30	0.26	0.21	0.17	0.15	0.12	0.10	
0.00	0.00	0.00	0.30	0.23	0.19	0.16	0.12	0.10	0.08	0.06	0.05	
<p>Rating:11W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>												

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 0.75								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.14	0.16	0.17	0.18	0.19	0.20	0.21	0.22	0.22
	0.30		0.10	0.12	0.13	0.15	0.16	0.18	0.19	0.20	0.21
	0.20		0.07	0.09	0.11	0.12	0.14	0.16	0.17	0.18	0.19
0.50	0.50	0.20	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.21	0.21
	0.30		0.10	0.12	0.13	0.14	0.16	0.17	0.18	0.19	0.20
	0.20		0.07	0.09	0.10	0.12	0.14	0.15	0.16	0.18	0.19
0.30	0.50	0.20	0.14	0.15	0.16	0.17	0.18	0.19	0.19	0.20	0.20
	0.30		0.10	0.11	0.13	0.14	0.15	0.17	0.17	0.18	0.19
	0.20		0.07	0.09	0.10	0.12	0.13	0.15	0.16	0.17	0.18
0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
<p>Rating:11W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>											

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	847.0	0.8	0.8	0.12	0.12
1.0-2.0	844.7	2.4	3.2	0.37	0.50
2.0-3.0	841.1	4.0	7.3	0.62	1.11
3.0-4.0	835.3	5.6	12.9	0.86	1.97
4.0-5.0	827.6	7.1	20.0	1.09	3.06
5.0-6.0	818.3	8.6	28.6	1.32	4.37
6.0-7.0	807.0	10.0	38.6	1.53	5.91
7.0-8.0	794.3	11.4	50.0	1.74	7.65
8.0-9.0	780.8	12.7	62.6	1.94	9.58
9.0-10.0	765.9	13.9	76.5	2.12	11.70
10.0-11.0	749.5	15.0	91.5	2.29	13.99
11.0-12.0	732.8	16.0	107.5	2.45	16.45
12.0-13.0	715.2	17.0	124.4	2.60	19.04
13.0-14.0	696.3	17.8	142.3	2.73	21.77
14.0-15.0	676.9	18.6	160.9	2.84	24.62
15.0-16.0	657.0	19.3	180.1	2.95	27.56
16.0-17.0	636.0	19.8	199.9	3.03	30.59
17.0-18.0	614.1	20.2	220.2	3.10	33.69
18.0-19.0	591.6	20.6	240.8	3.15	36.84
19.0-20.0	568.4	20.8	261.6	3.18	40.03
20.0-21.0	544.2	20.9	282.5	3.20	43.22
21.0-22.0	519.2	20.9	303.3	3.19	46.42
22.0-23.0	493.7	20.7	324.0	3.17	49.59
23.0-24.0	467.3	20.4	344.5	3.13	52.71
24.0-25.0	440.6	20.0	364.5	3.07	55.78
25.0-26.0	413.9	19.5	384.1	2.99	58.77
26.0-27.0	387.3	19.0	403.0	2.90	61.67
27.0-28.0	361.0	18.3	421.3	2.80	64.47
28.0-29.0	335.4	17.6	438.8	2.69	67.15
29.0-30.0	310.4	16.8	455.6	2.56	69.72
30.0-31.0	285.9	15.9	471.5	2.44	72.15
31.0-32.0	262.2	15.0	486.5	2.30	74.45
32.0-33.0	239.0	14.1	500.6	2.16	76.61
33.0-34.0	216.9	13.1	513.8	2.01	78.62
34.0-35.0	196.2	12.2	525.9	1.86	80.48
35.0-36.0	176.4	11.2	537.2	1.72	82.20

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	158.1	10.3	547.5	1.58	83.78
37.0-38.0	141.4	9.4	556.9	1.44	85.22
38.0-39.0	125.7	8.6	565.5	1.31	86.54
39.0-40.0	111.5	7.8	573.3	1.19	87.73
40.0-41.0	98.7	7.0	580.3	1.08	88.80
41.0-42.0	87.0	6.3	586.6	0.97	89.77
42.0-43.0	76.6	5.7	592.3	0.87	90.64
43.0-44.0	67.8	5.1	597.4	0.78	91.42
44.0-45.0	60.2	4.6	602.1	0.71	92.13
45.0-46.0	53.3	4.2	606.2	0.64	92.77
46.0-47.0	47.4	3.8	610.0	0.58	93.34
47.0-48.0	42.2	3.4	613.4	0.52	93.87
48.0-49.0	37.7	3.1	616.5	0.47	94.34
49.0-50.0	33.9	2.8	619.3	0.43	94.77
50.0-51.0	30.6	2.6	621.9	0.40	95.17
51.0-52.0	27.6	2.4	624.3	0.36	95.53
52.0-53.0	25.0	2.2	626.5	0.33	95.86
53.0-54.0	22.6	2.0	628.4	0.31	96.17
54.0-55.0	20.5	1.8	630.3	0.28	96.45
55.0-56.0	18.4	1.7	631.9	0.26	96.70
56.0-57.0	16.5	1.5	633.5	0.23	96.93
57.0-58.0	14.7	1.4	634.8	0.21	97.14
58.0-59.0	13.1	1.2	636.0	0.19	97.33
59.0-60.0	11.6	1.1	637.1	0.17	97.50
60.0-61.0	10.4	1.0	638.1	0.15	97.65
61.0-62.0	9.3	0.9	639.0	0.14	97.79
62.0-63.0	8.3	0.8	639.8	0.12	97.91
63.0-64.0	7.4	0.7	640.6	0.11	98.02
64.0-65.0	6.7	0.7	641.2	0.10	98.12
65.0-66.0	6.0	0.6	641.8	0.09	98.21
66.0-67.0	5.4	0.5	642.4	0.08	98.30
67.0-68.0	4.9	0.5	642.9	0.08	98.37
68.0-69.0	4.4	0.5	643.3	0.07	98.44
69.0-70.0	4.0	0.4	643.7	0.06	98.51
70.0-71.0	3.7	0.4	644.1	0.06	98.56
71.0-72.0	3.3	0.3	644.5	0.05	98.62

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	2.9	0.3	644.8	0.05	98.66
73.0-74.0	2.5	0.3	645.0	0.04	98.70
74.0-75.0	2.1	0.2	645.2	0.03	98.74
75.0-76.0	1.7	0.2	645.4	0.03	98.77
76.0-77.0	1.3	0.1	645.6	0.02	98.79
77.0-78.0	0.9	0.1	645.7	0.02	98.80
78.0-79.0	0.6	0.1	645.7	0.01	98.81
79.0-80.0	0.4	0.0	645.8	0.01	98.82
80.0-81.0	0.2	0.0	645.8	0.00	98.82
81.0-82.0	0.0	0.0	645.8	0.00	98.82
82.0-83.0	0.0	0.0	645.8	0.00	98.82
83.0-84.0	0.0	0.0	645.8	0.00	98.82
84.0-85.0	0.0	0.0	645.8	0.00	98.82
85.0-86.0	0.0	0.0	645.8	0.00	98.82
86.0-87.0	0.0	0.0	645.8	0.00	98.82
87.0-88.0	0.0	0.0	645.8	0.00	98.82
88.0-89.0	0.0	0.0	645.8	0.00	98.82
89.0-90.0	0.0	0.0	645.8	0.00	98.82
90.0-91.0	0.0	0.0	645.8	0.00	98.82
91.0-92.0	0.0	0.0	645.8	0.00	98.82
92.0-93.0	0.0	0.0	645.8	0.00	98.82
93.0-94.0	0.0	0.0	645.8	0.00	98.82
94.0-95.0	0.0	0.0	645.8	0.00	98.82
95.0-96.0	0.0	0.0	645.8	0.00	98.82
96.0-97.0	0.0	0.0	645.8	0.00	98.82
97.0-98.0	0.0	0.0	645.8	0.00	98.82
98.0-99.0	0.0	0.0	645.8	0.00	98.82
99.0-100.0	0.0	0.0	645.8	0.00	98.82
100.0-101.0	0.0	0.0	645.8	0.00	98.82
101.0-102.0	0.0	0.0	645.8	0.00	98.82
102.0-103.0	0.0	0.0	645.8	0.00	98.82
103.0-104.0	0.0	0.0	645.8	0.00	98.82
104.0-105.0	0.0	0.0	645.8	0.00	98.82
105.0-106.0	0.0	0.0	645.8	0.00	98.82
106.0-107.0	0.0	0.0	645.8	0.00	98.82
107.0-108.0	0.0	0.0	645.8	0.00	98.82

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	0.0	0.0	645.8	0.00	98.82
109.0-110.0	0.0	0.0	645.8	0.00	98.82
110.0-111.0	0.0	0.0	645.8	0.00	98.82
111.0-112.0	0.0	0.0	645.8	0.00	98.82
112.0-113.0	0.0	0.0	645.8	0.00	98.82
113.0-114.0	0.0	0.0	645.8	0.00	98.82
114.0-115.0	0.0	0.0	645.8	0.00	98.82
115.0-116.0	0.0	0.0	645.8	0.00	98.82
116.0-117.0	0.0	0.0	645.8	0.00	98.82
117.0-118.0	0.1	0.0	645.8	0.00	98.83
118.0-119.0	0.1	0.0	645.8	0.00	98.83
119.0-120.0	0.1	0.0	645.8	0.00	98.83
120.0-121.0	0.1	0.0	645.8	0.00	98.83
121.0-122.0	0.2	0.0	645.9	0.00	98.83
122.0-123.0	0.3	0.0	645.9	0.00	98.84
123.0-124.0	0.4	0.0	645.9	0.00	98.84
124.0-125.0	0.6	0.1	646.0	0.01	98.85
125.0-126.0	0.8	0.1	646.0	0.01	98.86
126.0-127.0	0.9	0.1	646.1	0.01	98.87
127.0-128.0	1.1	0.1	646.2	0.02	98.89
128.0-129.0	1.2	0.1	646.3	0.02	98.90
129.0-130.0	1.3	0.1	646.4	0.02	98.92
130.0-131.0	1.4	0.1	646.6	0.02	98.94
131.0-132.0	1.5	0.1	646.7	0.02	98.96
132.0-133.0	1.6	0.1	646.8	0.02	98.98
133.0-134.0	1.7	0.1	646.9	0.02	99.00
134.0-135.0	1.8	0.1	647.1	0.02	99.02
135.0-136.0	1.9	0.1	647.2	0.02	99.04
136.0-137.0	2.0	0.1	647.4	0.02	99.06
137.0-138.0	2.1	0.2	647.5	0.02	99.09
138.0-139.0	2.2	0.2	647.7	0.02	99.11
139.0-140.0	2.3	0.2	647.8	0.02	99.14
140.0-141.0	2.4	0.2	648.0	0.03	99.16
141.0-142.0	2.5	0.2	648.2	0.03	99.19
142.0-143.0	2.6	0.2	648.4	0.03	99.21
143.0-144.0	2.7	0.2	648.5	0.03	99.24

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	2.8	0.2	648.7	0.03	99.27
145.0-146.0	3.0	0.2	648.9	0.03	99.30
146.0-147.0	3.1	0.2	649.1	0.03	99.33
147.0-148.0	3.2	0.2	649.3	0.03	99.35
148.0-149.0	3.3	0.2	649.5	0.03	99.38
149.0-150.0	3.4	0.2	649.6	0.03	99.41
150.0-151.0	3.5	0.2	649.8	0.03	99.44
151.0-152.0	3.6	0.2	650.0	0.03	99.47
152.0-153.0	3.8	0.2	650.2	0.03	99.50
153.0-154.0	3.9	0.2	650.4	0.03	99.53
154.0-155.0	4.0	0.2	650.6	0.03	99.56
155.0-156.0	4.2	0.2	650.8	0.03	99.59
156.0-157.0	4.3	0.2	651.0	0.03	99.62
157.0-158.0	4.4	0.2	651.2	0.03	99.64
158.0-159.0	4.5	0.2	651.3	0.03	99.67
159.0-160.0	4.6	0.2	651.5	0.03	99.70
160.0-161.0	4.7	0.2	651.7	0.03	99.72
161.0-162.0	4.8	0.2	651.9	0.03	99.75
162.0-163.0	4.9	0.2	652.0	0.02	99.77
163.0-164.0	5.0	0.2	652.2	0.02	99.80
164.0-165.0	5.1	0.1	652.3	0.02	99.82
165.0-166.0	5.2	0.1	652.5	0.02	99.84
166.0-167.0	5.2	0.1	652.6	0.02	99.86
167.0-168.0	5.3	0.1	652.7	0.02	99.88
168.0-169.0	5.4	0.1	652.8	0.02	99.90
169.0-170.0	5.5	0.1	652.9	0.02	99.92
170.0-171.0	5.5	0.1	653.0	0.02	99.93
171.0-172.0	5.6	0.1	653.1	0.01	99.95
172.0-173.0	5.6	0.1	653.2	0.01	99.96
173.0-174.0	5.7	0.1	653.3	0.01	99.97
174.0-175.0	5.8	0.1	653.3	0.01	99.98
175.0-176.0	5.8	0.1	653.4	0.01	99.99
176.0-177.0	5.9	0.0	653.4	0.01	99.99
177.0-178.0	5.9	0.0	653.5	0.00	100.00
178.0-179.0	5.9	0.0	653.5	0.00	100.00
179.0-180.0	5.9	0.0	653.5	0.00	100.00

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G0.0	847.3	847.8	849.4	847.4	848.7	846.6	847.3	847.8	849.4	847.4
G1.0	841.5	844.2	845.6	848.0	849.3	845.7	848.1	847.2	847.6	845.7
G2.0	837.7	843.1	844.2	846.4	844.8	841.0	848.1	847.9	841.9	839.7
G3.0	832.0	836.1	841.8	843.3	840.8	837.8	848.0	844.0	838.8	834.8
G4.0	821.9	827.7	836.1	834.9	833.1	831.5	838.4	834.8	834.4	829.8
G5.0	812.3	820.8	826.5	831.0	829.3	822.1	832.1	827.5	822.7	821.2
G6.0	797.9	810.6	815.9	820.6	819.2	811.0	822.2	819.0	815.8	808.0
G7.0	787.0	797.0	805.8	808.6	810.6	800.8	812.8	805.9	802.1	793.8
G8.0	772.0	782.8	791.9	798.4	794.6	789.0	800.7	792.3	786.3	779.8
G9.0	757.4	768.6	778.3	783.3	780.7	774.3	784.9	781.2	774.5	769.2
G10.0	737.0	754.6	763.2	769.6	768.4	758.1	771.6	763.1	754.7	749.3
G11.0	720.8	736.9	747.8	752.9	752.7	744.2	758.0	746.9	737.8	731.7
G12.0	702.7	721.6	731.9	738.6	735.0	724.9	741.1	732.5	719.7	715.4
G13.0	681.4	701.6	715.2	718.7	722.0	709.1	727.3	713.3	700.2	694.1
G14.0	659.2	682.4	696.5	700.9	703.3	690.5	707.7	694.8	681.9	673.5
G15.0	639.7	663.8	677.9	686.6	687.8	673.7	689.4	674.3	661.2	650.6
G16.0	618.6	644.1	659.9	665.6	665.3	653.4	671.2	654.9	643.6	628.1
G17.0	600.5	620.3	639.7	643.9	643.4	630.2	650.8	635.9	619.4	604.4
G18.0	579.2	599.3	616.6	620.9	617.6	605.1	630.2	616.8	598.9	584.0
G19.0	552.4	577.0	593.1	596.5	592.8	581.3	608.1	594.5	577.8	561.7
G20.0	529.5	553.3	568.7	569.8	566.5	559.1	585.2	572.2	556.0	541.2
G21.0	503.7	527.3	544.2	546.9	540.0	529.0	560.5	547.2	531.9	516.8
G22.0	478.6	498.5	518.4	519.1	514.2	503.5	535.8	523.9	505.3	495.7
G23.0	449.0	472.4	491.8	492.9	489.6	477.0	508.1	498.9	479.9	469.7
G24.0	423.5	447.7	465.8	466.9	458.9	451.9	482.3	470.3	454.4	444.5
G25.0	398.3	419.0	440.9	440.7	434.2	425.2	456.0	445.0	428.5	416.7
G26.0	371.6	393.9	413.7	415.4	409.1	397.6	429.0	417.8	402.2	387.6
G27.0	344.6	369.7	385.8	388.3	381.9	371.0	400.7	392.7	374.5	363.7
G28.0	320.6	343.3	358.9	362.1	356.2	345.2	373.0	364.9	349.3	338.3
G29.0	294.9	318.6	333.8	335.9	328.5	320.2	347.9	339.1	327.1	315.3
G30.0	271.9	292.8	308.7	311.8	305.1	295.4	323.1	313.7	299.8	287.5
G31.0	247.4	268.8	284.4	287.9	280.6	270.6	295.7	289.4	276.6	264.6
G32.0	225.9	247.4	258.3	260.2	256.5	247.5	272.5	266.2	254.1	242.6
G33.0	205.5	223.8	234.8	235.3	229.5	223.9	250.5	242.5	232.9	222.1
G34.0	187.1	203.2	212.0	212.2	207.1	199.0	228.4	222.0	214.0	201.6
G35.0	167.3	182.2	189.0	190.3	186.3	178.5	207.6	202.9	195.3	181.0
G36.0	150.5	162.2	166.6	169.4	166.5	160.3	185.7	183.4	175.8	164.6

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G37.0	133.1	143.2	149.5	152.5	149.0	143.9	165.2	163.0	159.9	149.4
G38.0	117.5	124.5	133.3	136.9	133.5	128.1	147.2	145.5	143.2	134.8
G39.0	100.2	110.7	117.1	122.4	119.1	114.0	131.8	128.3	126.7	119.8
G40.0	88.2	98.8	104.5	108.8	106.3	101.5	116.9	114.3	111.8	106.5
G41.0	78.3	87.8	92.3	94.4	94.0	89.6	105.0	100.9	97.6	93.8
G42.0	69.9	77.0	79.8	83.3	82.8	79.0	93.9	90.5	87.3	81.1
G43.0	62.5	66.6	70.3	74.0	73.9	70.1	82.1	81.4	77.3	70.5
G44.0	55.0	58.4	61.6	66.4	66.2	62.9	71.8	72.4	69.4	63.1
G45.0	47.0	51.4	54.6	58.4	58.7	56.3	64.1	63.1	62.2	57.1
G46.0	41.1	45.1	48.1	51.7	53.2	50.1	57.1	55.0	54.7	51.7
G47.0	36.4	39.9	42.4	46.7	48.7	45.8	51.1	48.9	47.3	45.7
G48.0	32.4	34.8	37.7	42.0	44.8	41.8	45.1	43.8	41.4	38.7
G49.0	28.6	30.5	34.1	38.7	41.6	38.3	40.4	38.2	37.3	34.4
G50.0	25.1	27.6	31.0	35.3	38.2	35.2	36.4	33.4	33.0	31.0
G51.0	22.7	25.2	28.2	32.2	34.9	32.6	33.1	30.2	28.7	27.6
G52.0	20.7	23.4	25.6	29.1	31.7	29.6	30.4	27.5	25.6	23.9
G53.0	19.3	21.1	23.3	26.3	28.6	26.9	27.4	24.7	23.3	21.6
G54.0	17.4	19.4	21.3	23.6	25.4	24.0	25.3	22.5	21.2	19.7
G55.0	16.1	17.7	18.7	20.6	22.4	20.9	22.9	20.8	19.5	18.2
G56.0	14.6	15.9	16.6	18.0	19.7	18.5	20.0	18.8	17.7	16.8
G57.0	13.3	14.0	14.6	15.4	17.1	16.0	17.6	16.7	16.1	15.4
G58.0	11.9	12.5	12.8	13.5	14.8	14.0	15.5	14.6	14.6	13.9
G59.0	10.7	11.3	11.1	12.1	12.9	12.3	13.5	12.9	12.7	12.8
G60.0	9.7	9.9	9.8	10.5	11.1	10.7	11.9	11.5	11.4	11.5
G61.0	8.7	8.8	8.8	9.2	9.6	9.5	10.5	10.2	10.2	10.4
G62.0	7.9	7.8	7.6	8.1	8.4	8.3	9.3	9.0	9.0	9.5
G63.0	7.0	7.3	6.9	7.1	7.5	7.4	8.0	8.0	8.2	8.6
G64.0	6.2	6.4	6.2	6.3	6.6	6.6	7.3	7.2	7.3	7.7
G65.0	5.6	5.8	5.5	5.7	6.0	6.1	6.5	6.5	6.9	7.0
G66.0	5.1	5.1	5.0	4.9	5.5	5.6	5.8	6.0	6.3	6.1
G67.0	4.4	4.7	4.7	4.5	5.0	4.8	5.3	5.1	5.5	5.4
G68.0	4.1	4.2	4.2	3.9	4.6	4.3	5.0	4.7	4.8	4.7
G69.0	3.9	4.0	4.0	3.4	4.1	3.9	4.7	4.3	4.5	4.2
G70.0	3.6	3.7	3.6	3.3	3.8	3.6	4.2	3.7	4.3	3.8
G71.0	3.2	3.1	3.3	2.9	3.4	3.4	3.9	3.4	3.8	3.2
G72.0	2.9	2.9	3.0	2.4	2.8	2.7	3.6	3.2	3.4	3.0
G73.0	2.4	2.4	2.6	2.0	2.2	2.2	3.3	2.9	3.1	2.6

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G74.0	2.1	2.4	2.3	1.8	1.7	1.6	3.0	2.6	2.7	2.4
G75.0	1.8	1.9	1.7	1.3	1.3	1.3	2.5	2.2	2.3	2.0
G76.0	1.5	1.6	1.4	0.0	0.0	0.0	2.1	1.8	2.2	1.9
G77.0	1.0	1.4	1.0	0.0	0.0	0.0	1.6	1.6	2.0	1.6
G78.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1	1.4	1.5	1.5
G79.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1	1.0	1.2	0.0
G80.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1	1.0	0.0	0.0
G81.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1	0.0	0.0	0.0
G82.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G83.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G84.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G85.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G86.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G87.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G88.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G89.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G91.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G92.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G93.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G94.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G95.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G96.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G97.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G98.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G99.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G101.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G102.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G103.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G104.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G105.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G106.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G107.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G108.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G109.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G110.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

Candlepower Table (Continue 3)

Unit: cd

G/C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G111.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G112.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G113.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G114.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G115.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G116.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G117.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	0.0
G118.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1	0.0
G119.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	0.0
G120.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	1.0
G121.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	0.0
G122.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	0.0	1.2	0.0
G123.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	0.0	1.2	1.0
G124.0	0.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0	1.2	1.0
G125.0	1.1	1.0	0.0	1.1	1.0	1.0	1.0	0.0	1.1	1.2
G126.0	1.1	1.2	1.0	0.0	0.0	0.0	1.1	1.0	1.3	1.2
G127.0	1.2	1.1	1.1	1.0	1.0	1.2	1.0	1.0	1.2	1.1
G128.0	1.1	1.3	1.3	1.2	1.1	1.3	1.1	1.2	1.4	1.1
G129.0	1.2	1.5	1.3	1.3	1.3	1.2	1.1	1.2	1.5	1.5
G130.0	1.3	1.4	1.2	1.3	1.5	1.2	1.1	1.2	1.6	1.6
G131.0	1.4	1.5	1.4	1.6	1.5	1.3	1.3	1.4	1.5	1.8
G132.0	1.5	1.8	1.4	1.6	1.5	1.6	1.3	1.4	1.7	1.8
G133.0	1.5	1.8	1.7	1.6	1.7	1.6	1.4	1.4	1.7	1.9
G134.0	1.5	1.9	1.7	1.8	1.8	1.7	1.6	1.5	2.0	1.9
G135.0	1.6	2.1	1.8	1.9	1.8	1.9	1.6	1.8	1.9	1.8
G136.0	1.8	2.1	1.9	2.0	1.9	2.0	1.7	2.0	2.2	1.8
G137.0	2.0	2.3	1.9	2.2	2.1	2.0	1.7	1.8	2.2	2.2
G138.0	1.9	2.3	2.1	2.2	2.0	2.3	2.0	2.0	2.4	2.3
G139.0	1.9	2.5	2.4	2.4	2.2	2.3	2.2	2.0	2.6	2.4
G140.0	2.0	2.7	2.5	2.3	2.2	2.3	2.3	2.2	2.3	2.7
G141.0	2.3	2.8	2.4	2.4	2.2	2.4	2.4	2.4	2.4	2.8
G142.0	2.5	2.9	2.4	2.5	2.5	2.4	2.7	2.6	2.6	2.7
G143.0	2.4	2.8	2.8	2.8	2.5	2.8	2.7	2.5	2.7	2.8
G144.0	2.4	3.0	2.8	2.9	2.7	2.8	2.7	2.8	2.8	3.1
G145.0	2.5	3.1	3.1	2.9	2.9	2.9	2.8	2.7	2.9	3.2
G146.0	2.8	3.2	3.2	3.2	3.0	3.0	2.8	2.9	3.2	3.2
G147.0	3.0	3.4	3.3	3.3	3.0	3.1	3.0	3.1	3.2	3.2

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

Candlepower Table (Continue 4)

Unit: cd

G/C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G148.0	3.1	3.6	3.4	3.3	3.2	3.2	3.2	3.2	3.4	3.1
G149.0	3.2	3.7	3.5	3.4	3.3	3.3	3.4	3.3	3.5	3.2
G150.0	3.2	4.0	3.5	3.5	3.5	3.4	3.4	3.4	3.6	3.5
G151.0	3.4	4.0	3.6	3.4	3.4	3.5	3.5	3.6	3.9	3.5
G152.0	3.6	4.1	3.7	3.5	3.7	3.6	3.6	3.7	4.0	3.6
G153.0	3.5	4.2	3.9	3.7	3.6	3.7	3.8	3.9	4.1	3.7
G154.0	3.5	4.5	4.0	3.9	3.9	3.9	4.0	3.9	4.1	3.8
G155.0	3.7	4.5	4.3	4.1	4.1	4.1	4.2	3.9	4.2	4.0
G156.0	3.9	4.5	4.3	4.2	4.2	4.3	4.1	4.1	4.3	4.2
G157.0	4.0	4.6	4.3	4.2	4.3	4.2	4.5	4.3	4.4	4.1
G158.0	4.2	4.8	4.5	4.5	4.3	4.3	4.3	4.3	4.4	4.4
G159.0	4.2	4.8	4.8	4.6	4.4	4.3	4.4	4.5	4.5	4.5
G160.0	4.4	4.8	4.9	4.6	4.6	4.4	4.6	4.5	4.6	4.6
G161.0	4.6	5.1	4.8	4.7	4.8	4.5	4.5	4.5	4.7	4.7
G162.0	4.7	5.3	5.0	4.6	4.7	4.7	4.6	4.8	4.7	5.0
G163.0	4.8	5.1	5.2	4.9	4.9	4.8	4.7	4.8	4.9	5.0
G164.0	5.0	5.2	5.3	5.0	5.1	5.0	4.9	4.8	5.0	5.1
G165.0	5.0	5.4	5.4	5.0	5.0	5.2	5.0	5.2	4.9	5.1
G166.0	5.0	5.6	5.5	5.3	5.1	5.2	5.1	5.4	4.9	5.2
G167.0	5.1	5.7	5.3	5.3	5.1	5.1	5.2	5.5	5.1	5.2
G168.0	5.2	5.7	5.5	5.5	5.3	5.2	5.3	5.5	5.3	5.6
G169.0	5.4	5.9	5.6	5.5	5.4	5.3	5.4	5.6	5.5	5.6
G170.0	5.4	5.9	5.7	5.5	5.4	5.4	5.4	5.6	5.4	5.6
G171.0	5.6	5.8	5.8	5.5	5.4	5.5	5.6	5.7	5.4	5.6
G172.0	5.5	6.1	5.7	5.5	5.7	5.5	5.5	5.6	5.4	5.7
G173.0	5.5	5.9	6.1	5.6	5.5	5.7	5.6	5.5	5.7	5.8
G174.0	5.6	6.0	5.9	5.7	5.8	5.7	5.7	5.5	5.8	5.8
G175.0	5.7	6.1	5.9	5.6	5.7	5.7	5.7	5.7	5.9	5.9
G176.0	5.7	6.3	6.0	5.8	5.9	5.8	5.9	5.6	5.7	5.8
G177.0	5.8	6.2	6.1	5.7	5.8	5.8	6.0	5.7	5.9	5.8
G178.0	5.7	6.4	6.1	5.7	5.8	5.7	6.1	5.8	5.9	5.8
G179.0	5.8	6.2	6.0	5.8	5.8	5.8	6.0	5.9	5.9	5.8
G180.0	5.8	6.2	5.9	5.9	5.7	5.9	6.2	5.9	5.9	5.8

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Candlepower Table (Continue 5)

Unit: cd

G\C	C300.0	C330.0	C360.0						
G0.0	848.7	846.6	847.3						
G1.0	844.5	845.6	841.5						
G2.0	842.3	841.9	837.7						
G3.0	834.2	835.2	832.0						
G4.0	827.7	829.1	821.9						
G5.0	818.6	820.1	812.3						
G6.0	806.4	808.9	797.9						
G7.0	792.0	796.6	787.0						
G8.0	778.6	784.8	772.0						
G9.0	763.9	771.9	757.4						
G10.0	749.3	753.2	737.0						
G11.0	729.1	736.4	720.8						
G12.0	712.1	716.1	702.7						
G13.0	692.0	697.5	681.4						
G14.0	671.6	676.5	659.2						
G15.0	649.1	651.9	639.7						
G16.0	624.2	632.7	618.6						
G17.0	603.1	610.0	600.5						
G18.0	579.7	588.0	579.2						
G19.0	558.9	567.7	552.4						
G20.0	534.8	543.7	529.5						
G21.0	511.6	520.6	503.7						
G22.0	490.3	498.9	478.6						
G23.0	465.5	472.7	449.0						
G24.0	439.4	441.7	423.5						
G25.0	409.1	412.4	398.3						
G26.0	381.6	387.0	371.6						
G27.0	354.3	361.6	344.6						
G28.0	330.6	333.8	320.6						
G29.0	303.5	309.3	294.9						
G30.0	280.5	284.9	271.9						
G31.0	258.3	262.3	247.4						
G32.0	235.2	239.9	225.9						
G33.0	214.0	215.6	205.5						
G34.0	193.0	196.6	187.1						
G35.0	174.1	177.0	167.3						
G36.0	157.0	160.2	150.5						

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Candlepower Table (Continue 6)

Unit: cd

G\C	C300.0	C330.0	C360.0						
G37.0	141.5	142.9	133.1						
G38.0	126.5	128.5	117.5						
G39.0	113.3	114.4	100.2						
G40.0	100.3	100.6	88.2						
G41.0	88.7	88.2	78.3						
G42.0	76.0	76.2	69.9						
G43.0	66.3	67.1	62.5						
G44.0	58.8	59.5	55.0						
G45.0	52.6	53.4	47.0						
G46.0	46.6	47.1	41.1						
G47.0	41.7	41.8	36.4						
G48.0	37.0	37.0	32.4						
G49.0	32.7	33.0	28.6						
G50.0	29.2	29.6	25.1						
G51.0	26.4	26.5	22.7						
G52.0	23.3	23.3	20.7						
G53.0	21.0	21.2	19.3						
G54.0	19.1	19.2	17.4						
G55.0	17.6	17.8	16.1						
G56.0	16.5	16.4	14.6						
G57.0	15.4	15.4	13.3						
G58.0	14.1	14.1	11.9						
G59.0	12.9	12.9	10.7						
G60.0	11.9	11.7	9.7						
G61.0	11.1	10.8	8.7						
G62.0	9.9	9.7	7.9						
G63.0	9.1	8.9	7.0						
G64.0	8.2	7.9	6.2						
G65.0	7.6	7.1	5.6						
G66.0	6.8	6.5	5.1						
G67.0	6.3	5.8	4.4						
G68.0	5.7	5.3	4.1						
G69.0	5.1	4.7	3.9						
G70.0	4.7	4.3	3.6						
G71.0	4.3	4.1	3.2						
G72.0	3.7	3.5	2.9						
G73.0	3.5	3.2	2.4						

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

Candlepower Table (Continue 7)

Unit: cd

G\C	C300.0	C330.0	C360.0							
G74.0	2.9	2.8	2.1							
G75.0	2.5	2.3	1.8							
G76.0	2.2	2.2	1.5							
G77.0	2.0	1.7	1.0							
G78.0	1.5	1.6	0.0							
G79.0	1.3	1.2	0.0							
G80.0	1.1	1.0	0.0							
G81.0	0.0	0.0	0.0							
G82.0	0.0	0.0	0.0							
G83.0	0.0	0.0	0.0							
G84.0	0.0	0.0	0.0							
G85.0	0.0	0.0	0.0							
G86.0	0.0	0.0	0.0							
G87.0	0.0	0.0	0.0							
G88.0	0.0	0.0	0.0							
G89.0	0.0	0.0	0.0							
G90.0	0.0	0.0	0.0							
G91.0	0.0	0.0	0.0							
G92.0	0.0	0.0	0.0							
G93.0	0.0	0.0	0.0							
G94.0	0.0	0.0	0.0							
G95.0	0.0	0.0	0.0							
G96.0	0.0	0.0	0.0							
G97.0	0.0	0.0	0.0							
G98.0	0.0	0.0	0.0							
G99.0	0.0	0.0	0.0							
G100.0	0.0	0.0	0.0							
G101.0	0.0	0.0	0.0							
G102.0	0.0	0.0	0.0							
G103.0	0.0	0.0	0.0							
G104.0	0.0	0.0	0.0							
G105.0	0.0	0.0	0.0							
G106.0	0.0	0.0	0.0							
G107.0	0.0	0.0	0.0							
G108.0	0.0	0.0	0.0							
G109.0	0.0	0.0	0.0							
G110.0	0.0	0.0	0.0							

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector:

Candlepower Table (Continue 8)

Unit: cd

G\C	C300.0	C330.0	C360.0						
G111.0	0.0	0.0	0.0						
G112.0	0.0	0.0	0.0						
G113.0	0.0	0.0	0.0						
G114.0	0.0	0.0	0.0						
G115.0	0.0	0.0	0.0						
G116.0	0.0	0.0	0.0						
G117.0	0.0	0.0	0.0						
G118.0	0.0	0.0	0.0						
G119.0	0.0	0.0	0.0						
G120.0	0.0	0.0	0.0						
G121.0	0.0	0.0	0.0						
G122.0	0.0	1.1	0.0						
G123.0	0.0	1.0	0.0						
G124.0	0.0	1.0	0.0						
G125.0	0.0	1.1	1.1						
G126.0	0.0	1.1	1.1						
G127.0	1.0	1.2	1.2						
G128.0	1.1	1.1	1.1						
G129.0	1.1	1.3	1.2						
G130.0	1.2	1.3	1.3						
G131.0	1.2	1.3	1.4						
G132.0	1.2	1.4	1.5						
G133.0	1.3	1.5	1.5						
G134.0	1.4	1.6	1.5						
G135.0	1.5	1.8	1.6						
G136.0	1.7	1.9	1.8						
G137.0	1.8	2.0	2.0						
G138.0	1.9	2.0	1.9						
G139.0	2.0	2.2	1.9						
G140.0	2.2	2.3	2.0						
G141.0	2.3	2.4	2.3						
G142.0	2.3	2.5	2.5						
G143.0	2.5	2.7	2.4						
G144.0	2.5	2.7	2.4						
G145.0	2.8	2.9	2.5						
G146.0	3.0	2.9	2.8						
G147.0	2.9	3.3	3.0						

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

Candlepower Table (Continue 9)

Unit: cd

G\C	C300.0	C330.0	C360.0							
G148.0	3.2	3.1	3.1							
G149.0	3.3	3.3	3.2							
G150.0	3.3	3.5	3.2							
G151.0	3.5	3.7	3.4							
G152.0	3.6	3.8	3.6							
G153.0	3.8	4.0	3.5							
G154.0	3.9	4.2	3.5							
G155.0	4.0	4.2	3.7							
G156.0	4.2	4.4	3.9							
G157.0	4.4	4.4	4.0							
G158.0	4.4	4.5	4.2							
G159.0	4.5	4.5	4.2							
G160.0	4.6	4.7	4.4							
G161.0	4.7	4.8	4.6							
G162.0	4.9	5.1	4.7							
G163.0	4.9	5.1	4.8							
G164.0	5.1	5.0	5.0							
G165.0	5.1	5.0	5.0							
G166.0	5.2	5.1	5.0							
G167.0	5.1	5.1	5.1							
G168.0	5.2	5.3	5.2							
G169.0	5.2	5.5	5.4							
G170.0	5.3	5.4	5.4							
G171.0	5.4	5.5	5.6							
G172.0	5.4	5.7	5.5							
G173.0	5.9	5.6	5.5							
G174.0	5.7	5.8	5.6							
G175.0	6.0	5.8	5.7							
G176.0	5.8	5.8	5.7							
G177.0	6.0	5.8	5.8							
G178.0	6.0	5.8	5.7							
G179.0	6.0	6.0	5.8							
G180.0	6.1	6.1	5.8							

C Plane (°):0.0-360.0: 30.0
 Test Lab:
 Test Type: TYPE C
 Temperature:
 Operator:

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1800B
 Distance: 11.573 m [K=1.0000]
 Humidity:
 Inspector: