

Report No.:

Test Time: 2020-10-29 17:25

## Luminaire Property

Luminaire Manufacturer:

Luminaire Description: MLS023W12V30KD40 (不帶帽沿, 3.6W)

Lamp Catalog: L9-37-B

Voltage: 12.1 V

Power: 3.57 W

Lamp Description: DDC1T-500

Current: 0.382 A

Power Factor: 0.776

Volt Amps: 4.59 VA

## Photometric Results

CIE Class: Direct

Measurement Flux: 380.5 lm

Downward Ratio: 99%

Horizontal Diffuse Angle(10%,50%,75%,100%): H52.7,H31.2,H19.3,H1

Vertical Diffuse Angle(10%,50%,75%,100%): V52.3,V30.2,V20,V0

Luminaire Efficacy Rating (LER): 106.63

Max. Intensity: 1203.15 cd

S/MH(C0/C180): 0.51

Total Rated Lamp Lumens: 380.5 lm

Efficiency: 100%


Upward Ratio: 1%

Central Intensity: 1202.66 cd


Pos of Max. Intensity: H0 V1

S/MH(C90/C270): 0.50

Picture Of Luminaire



Luminous Intensity Distribution Curve

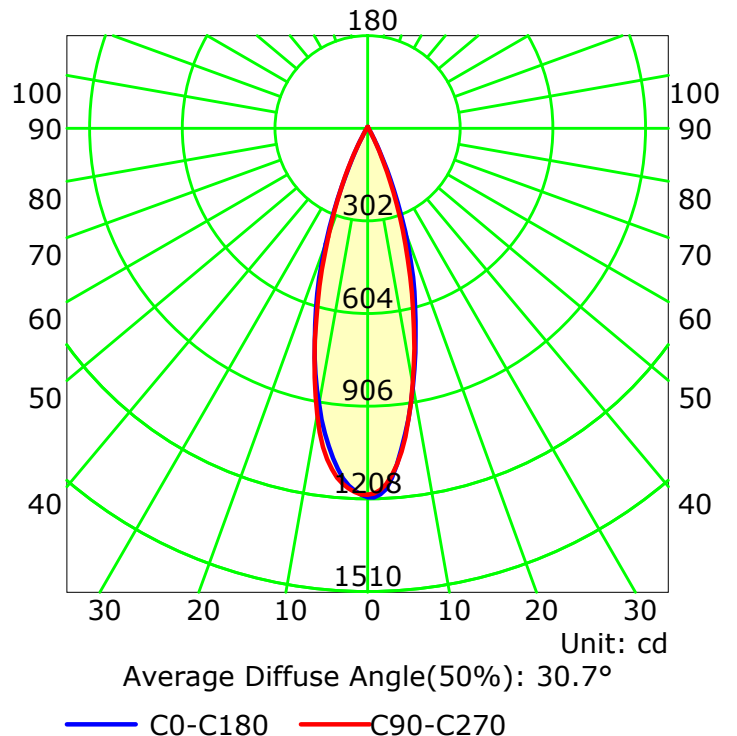

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:


## Luminous Intensity Distribution Curve

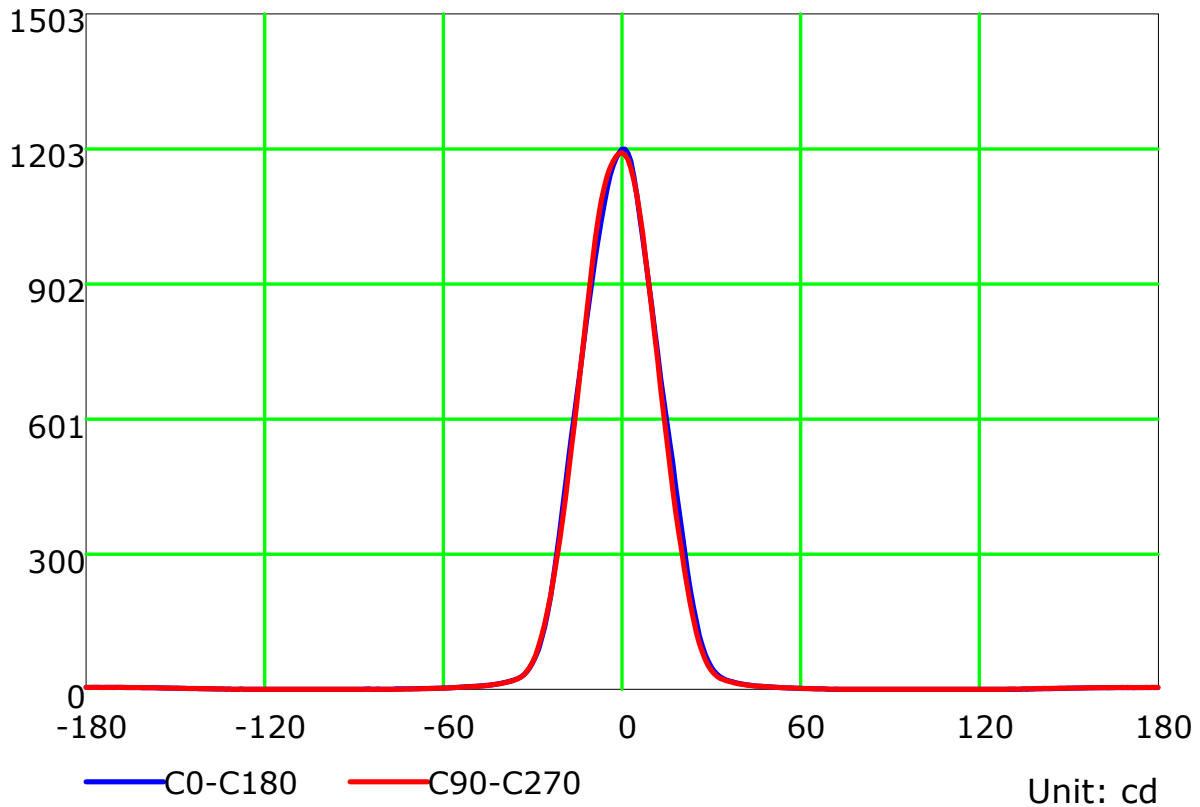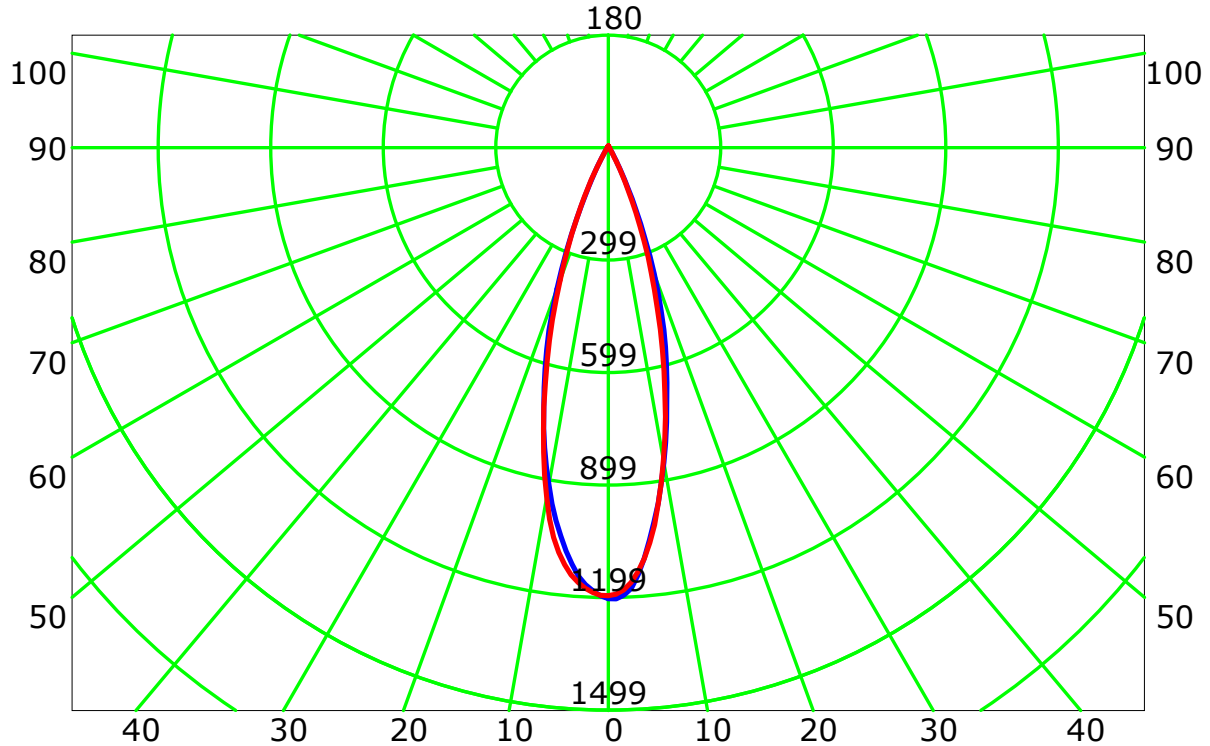

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Luminous Intensity Distribution Curve(cd/klm)

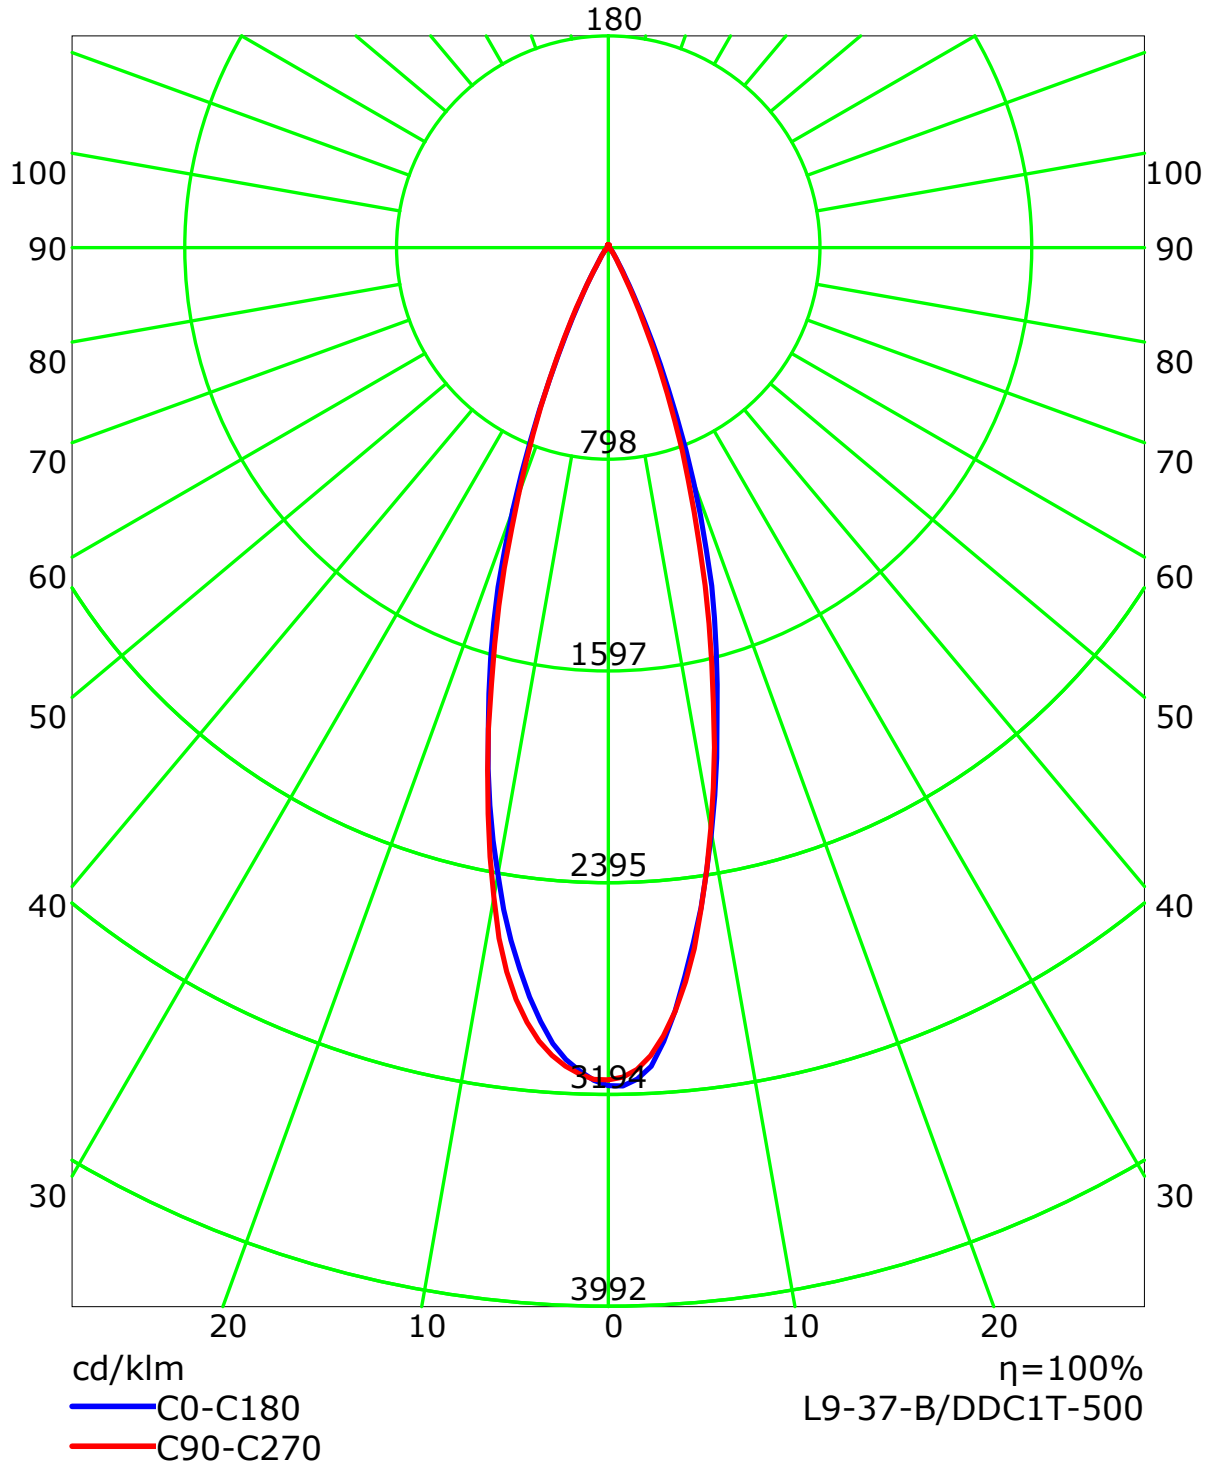


C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

### Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	114	112	110	108	112	110	108	106	105	104	103	101	100	99	98	97	96	94
2	110	106	103	100	108	104	101	99	101	98	96	98	96	94	95	93	92	90
3	106	101	97	94	104	99	96	93	97	94	91	94	92	89	92	90	88	87
4	102	96	92	88	100	95	91	88	93	89	87	91	88	85	89	86	84	83
5	98	92	87	84	97	91	87	83	89	85	83	87	84	82	86	83	81	80
6	95	88	83	80	94	87	83	80	86	82	79	84	81	78	83	80	78	77
7	92	85	80	77	91	84	80	76	83	79	76	81	78	75	80	77	75	74
8	89	81	77	74	88	81	76	73	80	76	73	79	75	73	78	75	72	71
9	86	79	74	71	85	78	74	71	77	73	70	76	73	70	75	72	70	69
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67


Spacing Criteria (0-180): 0.51  
 Spacing Criteria (90-270): 0.50  
 Spacing Criteria (Diagonal): 0.51

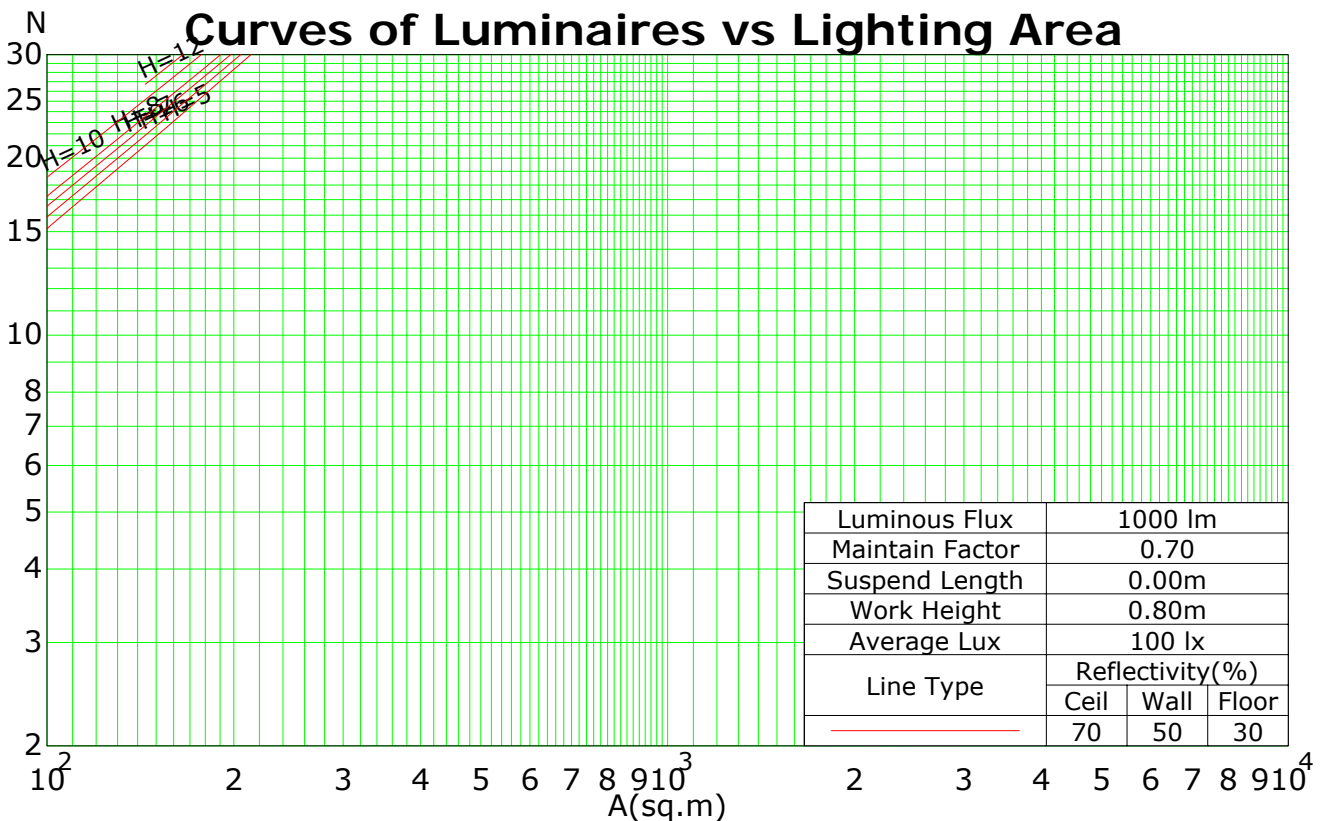

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Isocandela (rectangle)

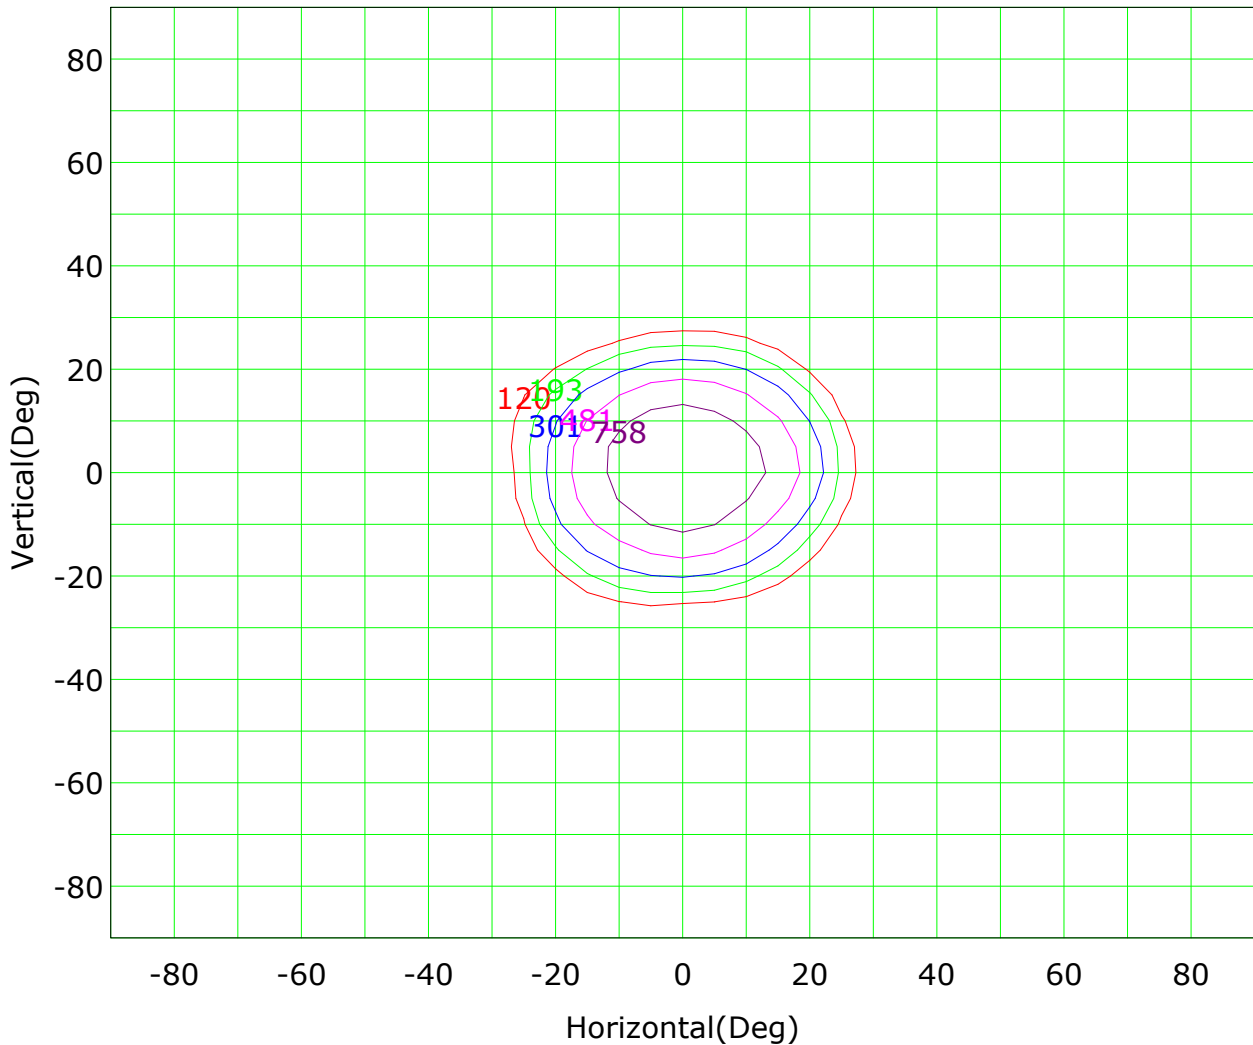


Imax (100%): 1203 cd

- |                  |                   |
|------------------|-------------------|
| — ( 10%): 120 cd | — ( 16%): 193 cd  |
| — ( 25%): 301 cd | — ( 40%): 481 cd  |
| — ( 63%): 758 cd | — (100%): 1203 cd |

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Isocandela (sphere)

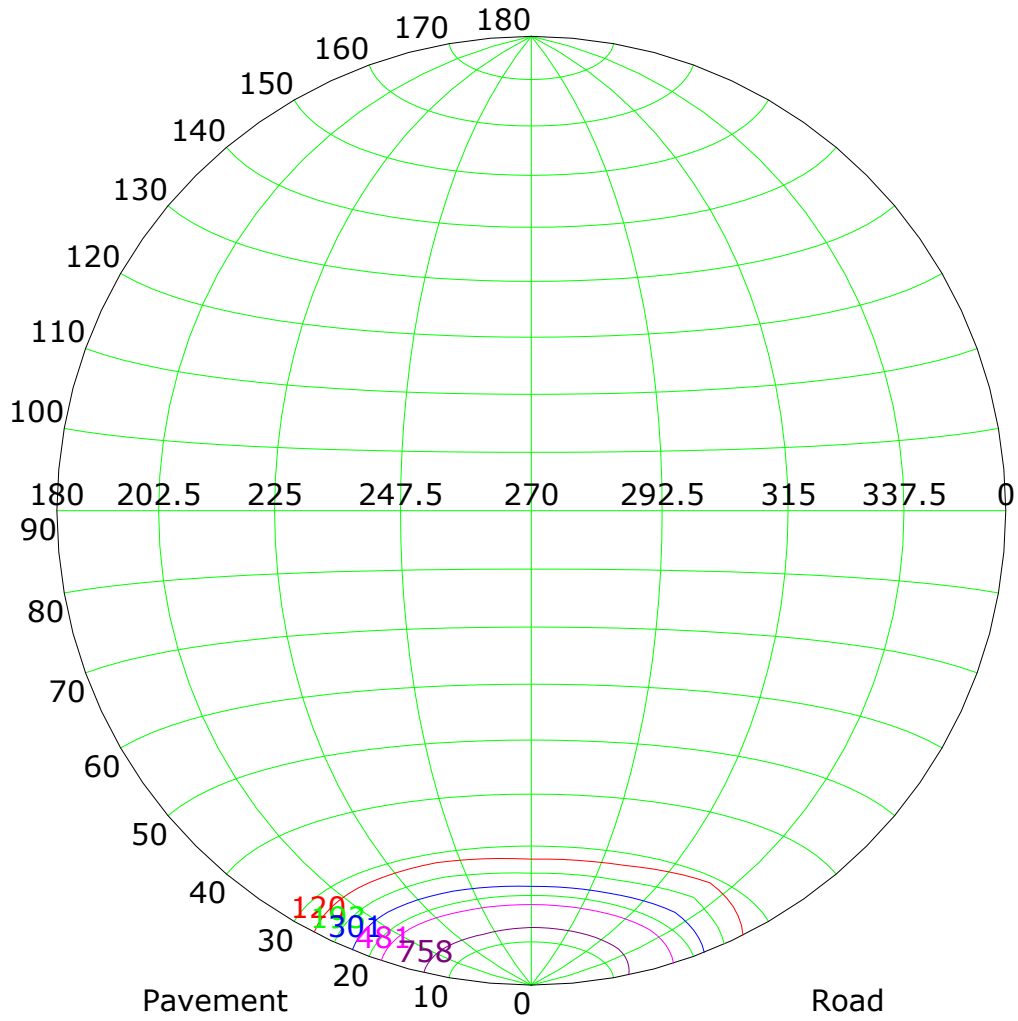


Imax (100%): 1203 cd

- |                  |                   |
|------------------|-------------------|
| — ( 10%): 120 cd | — ( 16%): 193 cd  |
| — ( 25%): 301 cd | — ( 40%): 481 cd  |
| — ( 63%): 758 cd | — (100%): 1203 cd |

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## IsoLux Plot

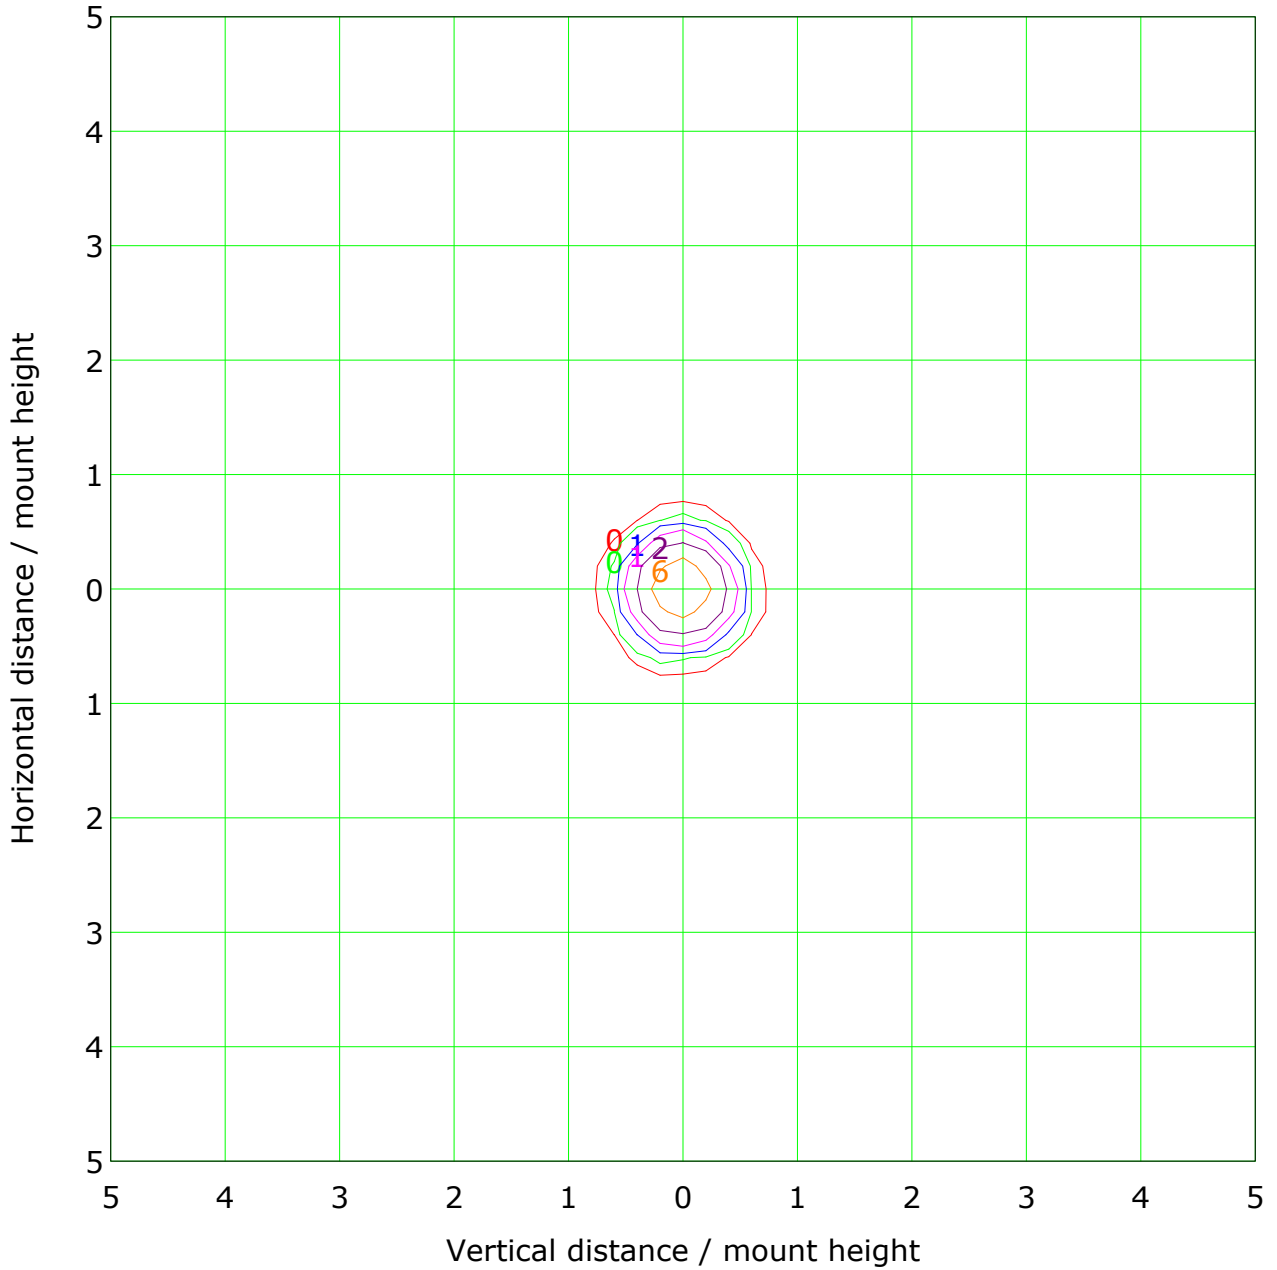


Mounting Height: 10.0m		Max Lux(100%): 12.0 lx	
— ( 1%):	0.1 lx	— ( 2%):	0.2 lx
— ( 5%):	0.6 lx	— (10%):	1.2 lx
— (20%):	2.4 lx	— (50%):	6.0 lx
— (100%):	12.0 lx		

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Roadway CU Curve

Efficiency(%)

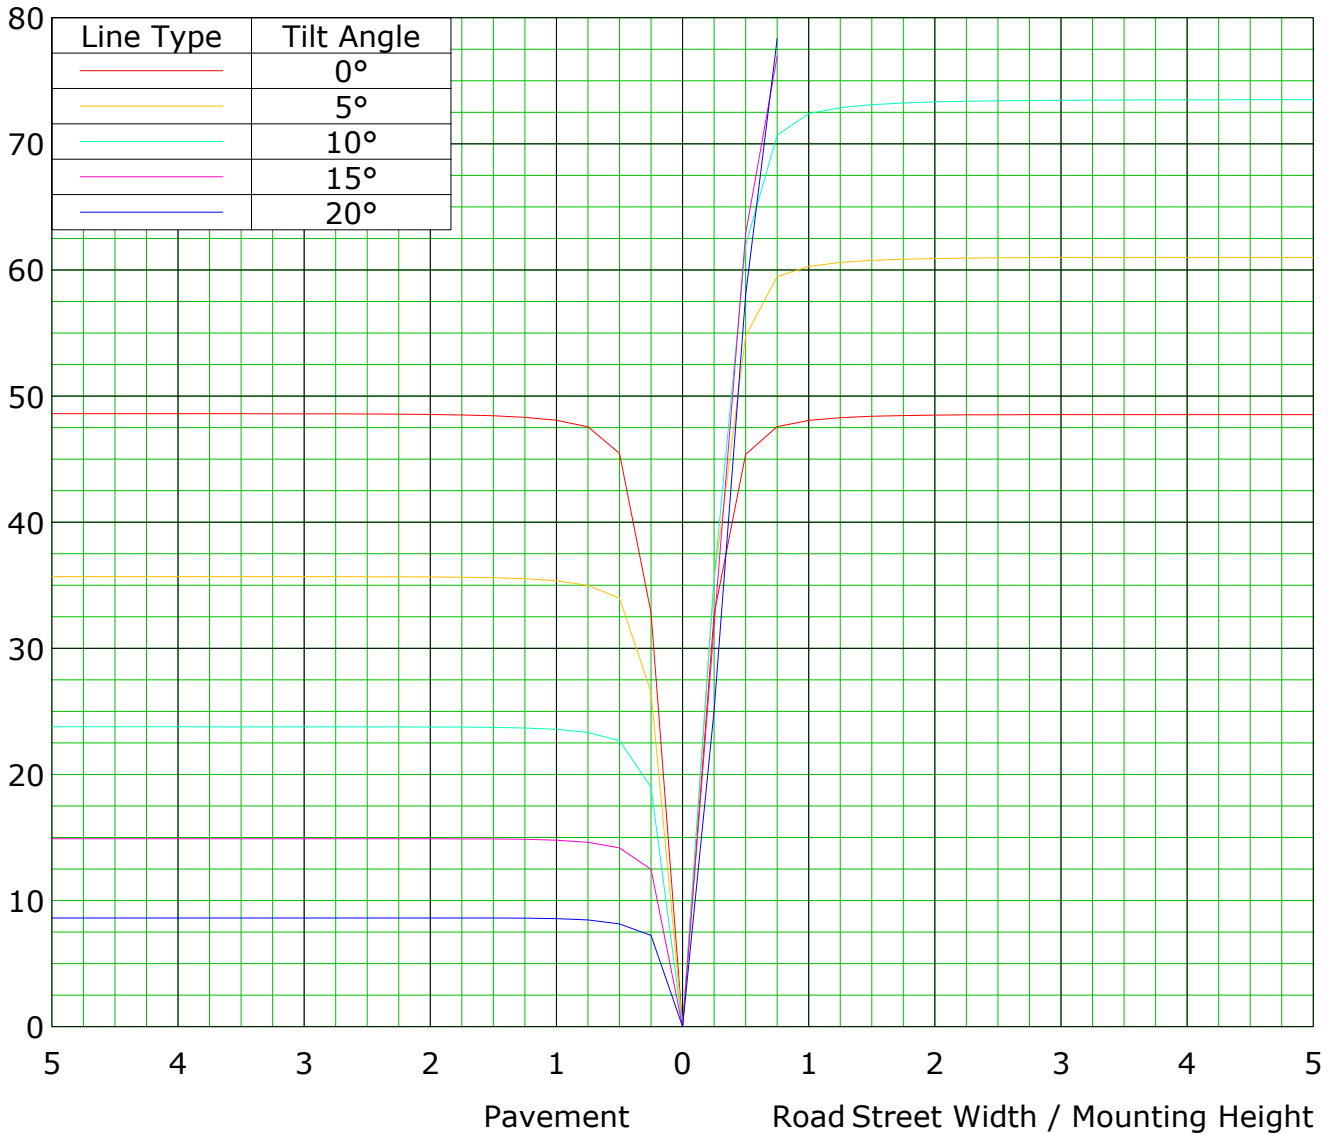

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:



Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:



## Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

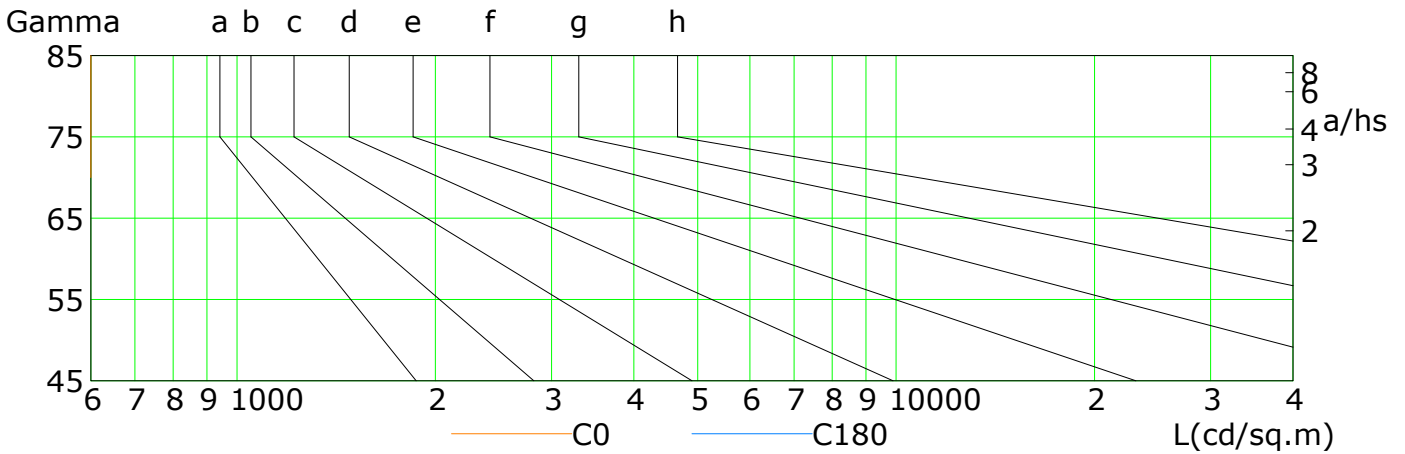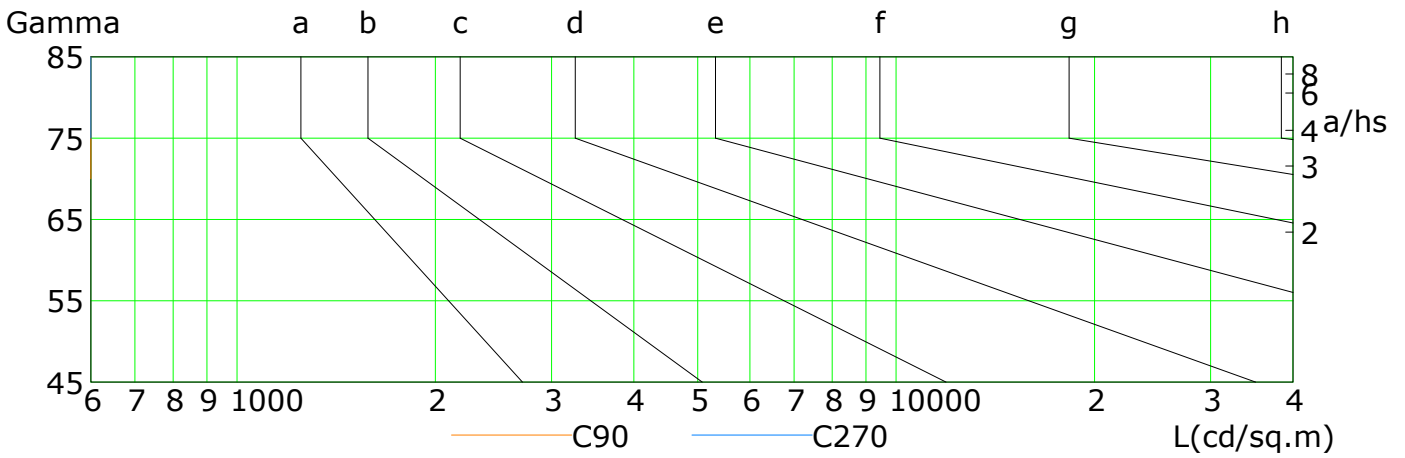

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	8	5	3	2	1	0	0	0	0
C90	7	5	4	2	1	0	0	0	0
C180	9	7	5	3	2	1	1	0	1
C270	9	6	4	3	2	1	0	0	0

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:


## Illuminance at a Distance

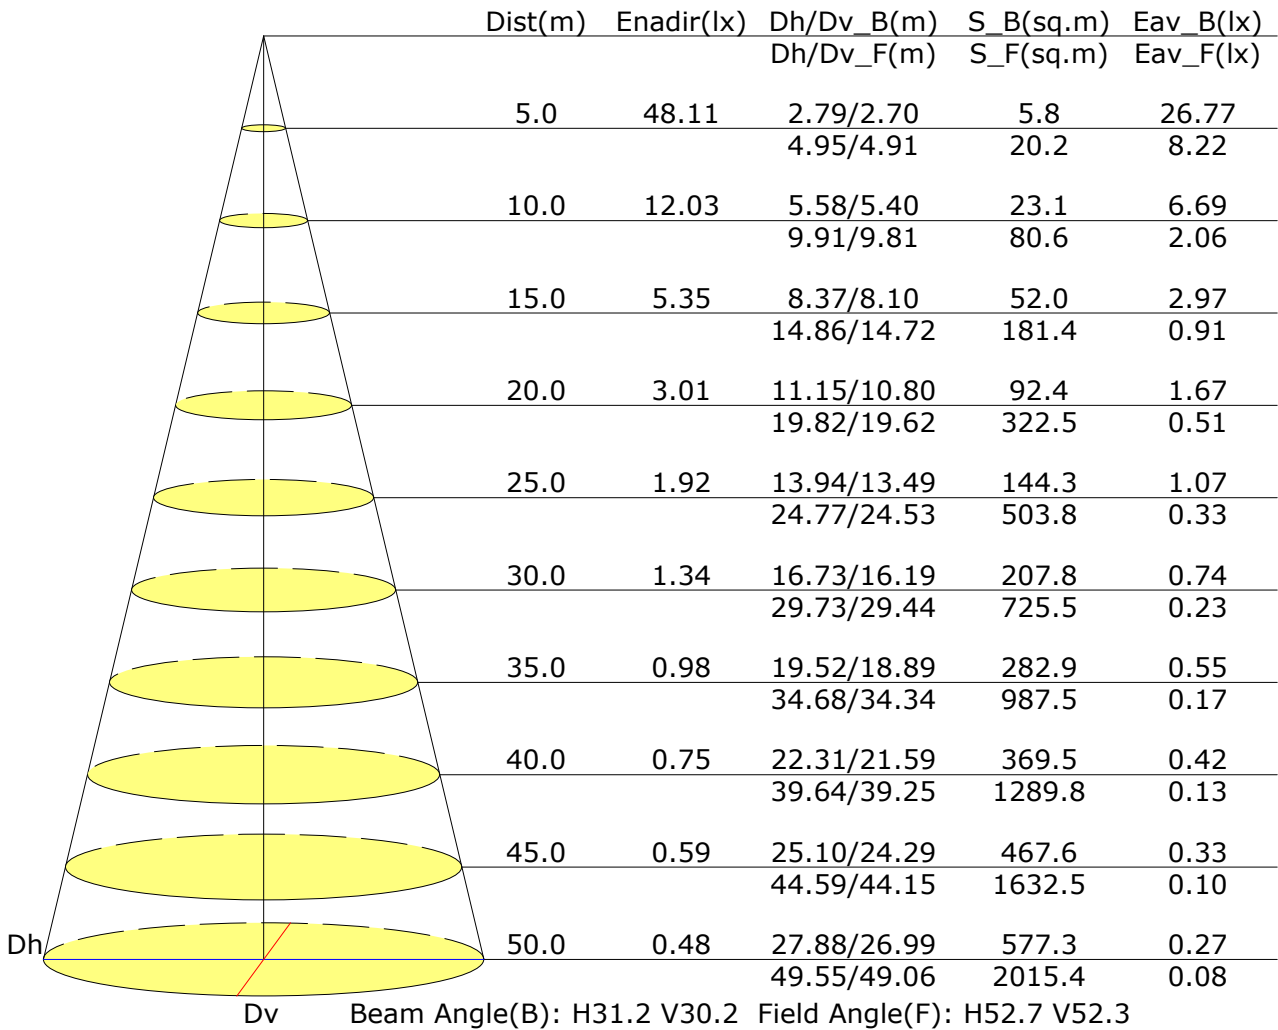

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Vertical IsoLux Plot

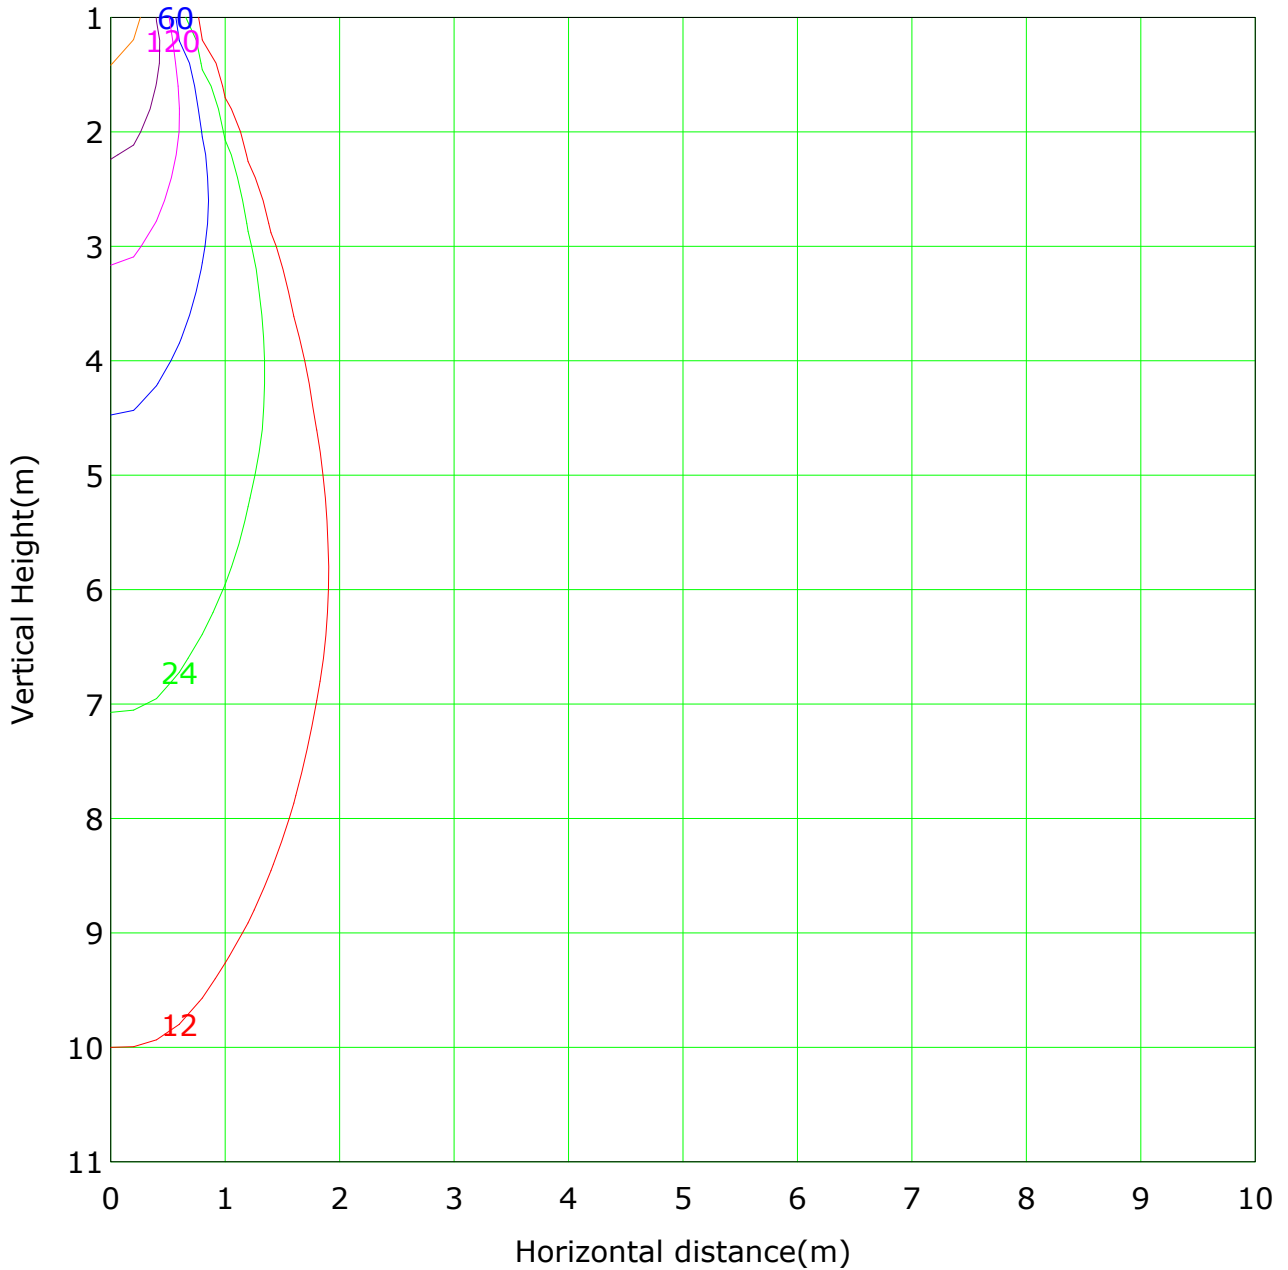

Lowest(m): 1.0m    Highest(m): 11.0m    Max Lux: 1202.7 lx


— ( 1%): 12.0 lx	— ( 2%): 24.1 lx
— ( 5%): 60.1 lx	— ( 10%): 120.3 lx
— ( 20%): 240.5 lx	— ( 50%): 601.3 lx
— (100%):1202.7 lx	

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:



## The Average Illuminance Effective Figure

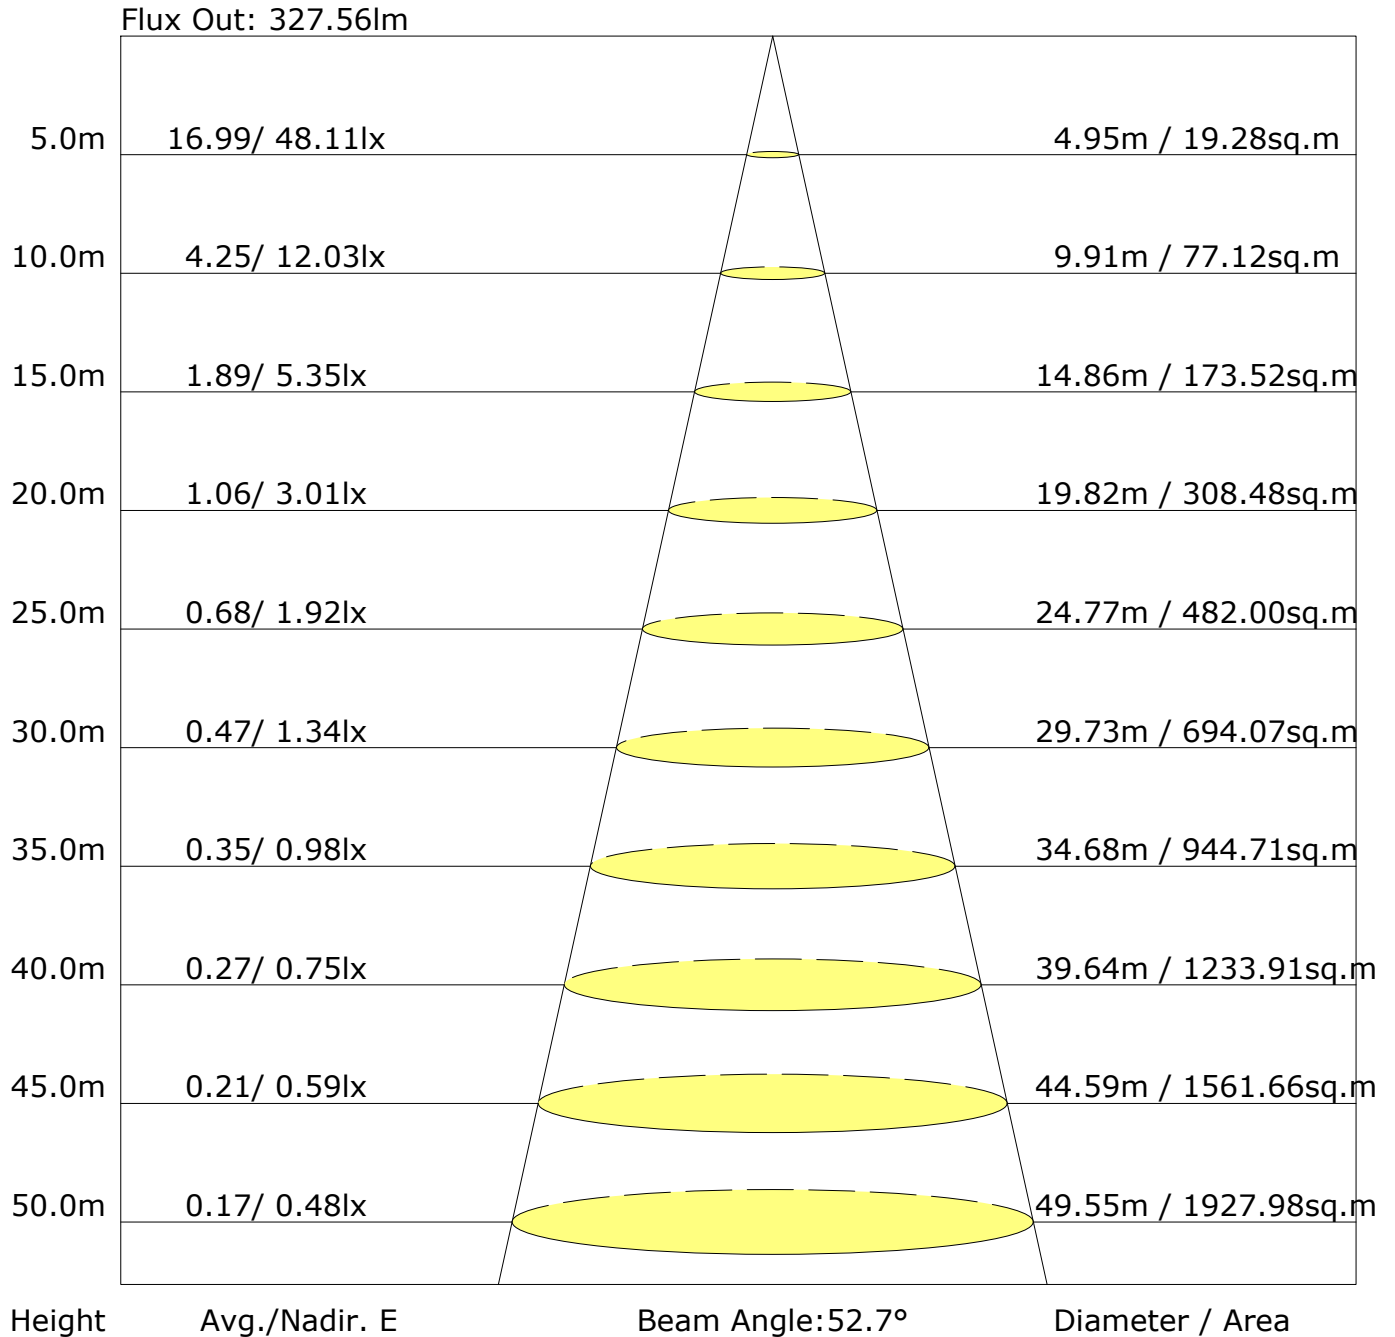

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## UGR Table


Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=4H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=8H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=12H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
Variations with the observer position at spacings:										
S=1.0H	-1.\$/-1.\$					-1.\$/-1.\$				
S=1.5H	-1.\$/-1.\$					-1.\$/-1.\$				
S=2.0H	-1.\$/-1.\$					-1.\$/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with 380lm ( $8\log(F/F_0) = -3.4$ ).

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

**FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM**

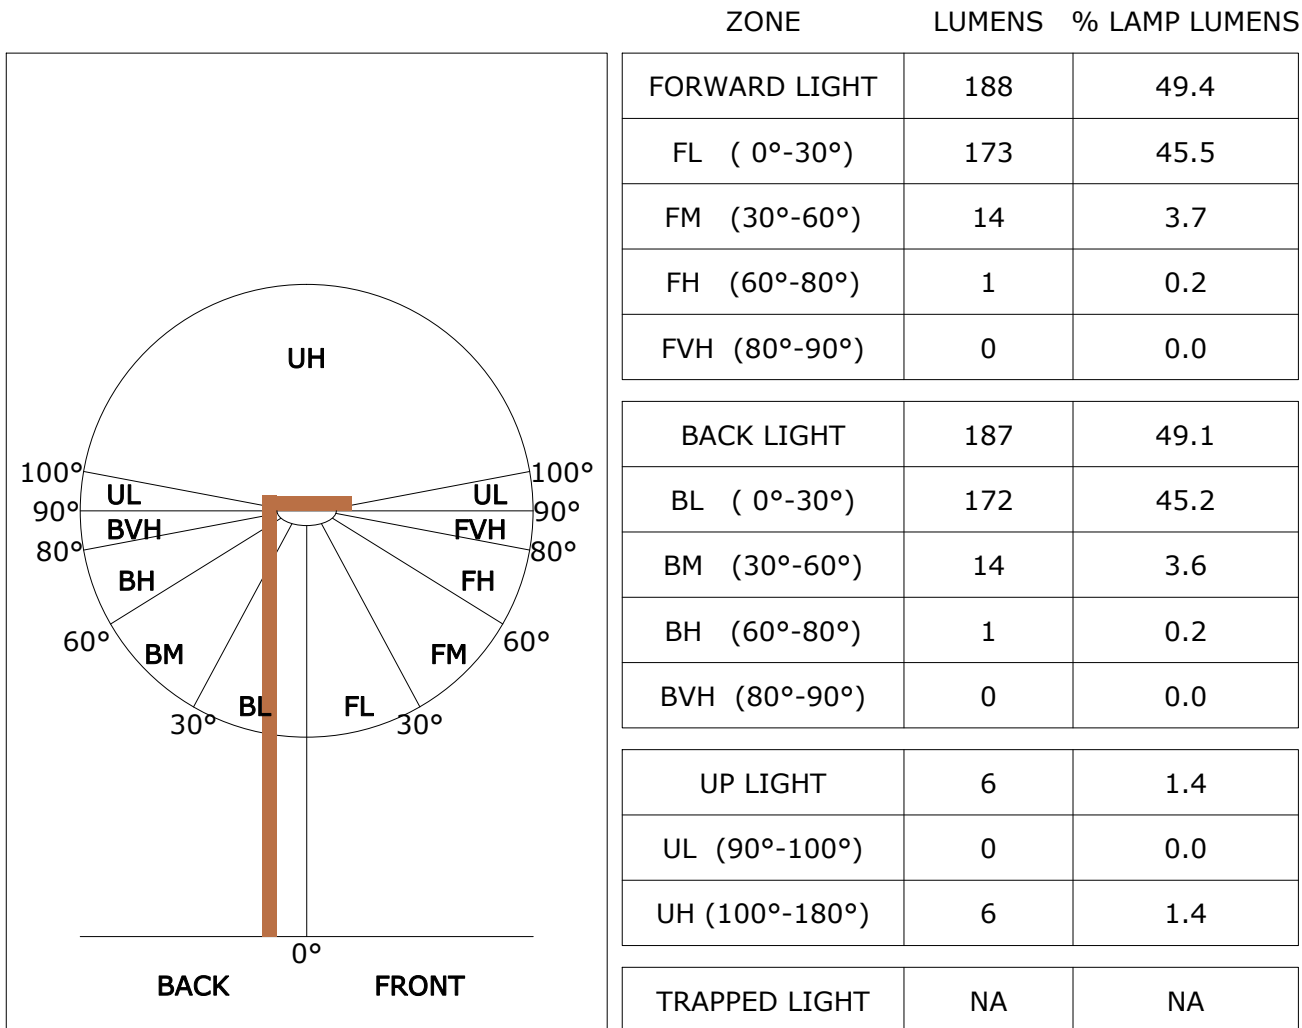


BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U1 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U1 G0

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

### LCS Graph

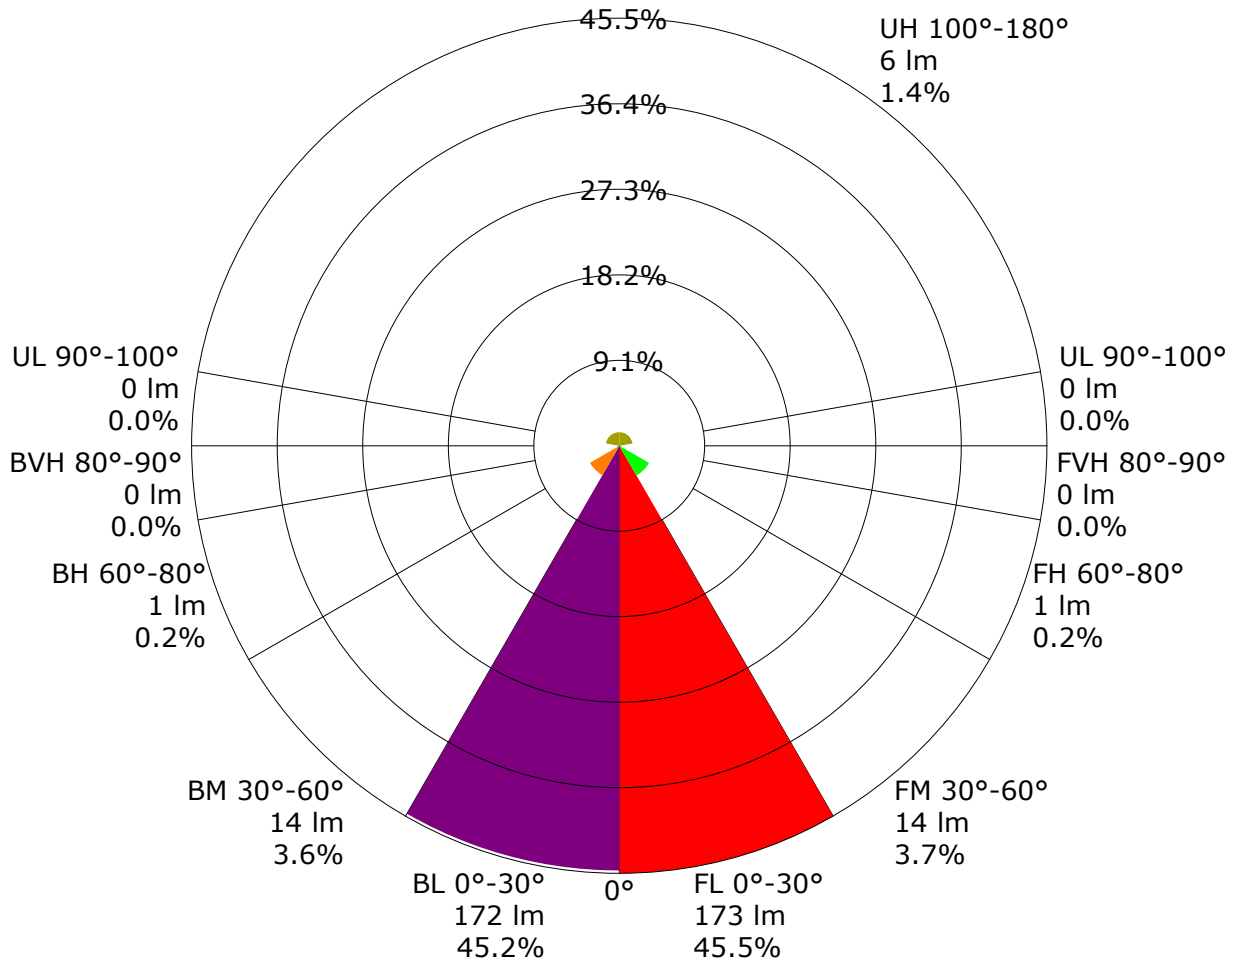

**Back Light**

**Forward Light**

Scale= MAX LCS%

Trapped Light:NA,NA



## Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.97	1.01	1.03	1.05	1.08	1.10	1.11	1.13	1.14	
	0.30		0.93	0.97	1.00	1.02	1.05	1.07	1.09	1.11	1.12	
	0.20		0.91	0.95	0.98	1.00	1.03	1.05	1.07	1.09	1.11	
0.50	0.50	0.20	0.95	0.99	1.01	1.03	1.05	1.06	1.07	1.09	1.09	
	0.30		0.92	0.96	0.98	1.00	1.03	1.04	1.06	1.07	1.08	
	0.20		0.90	0.94	0.96	0.98	1.01	1.03	1.04	1.06	1.07	
0.30	0.50	0.20	0.94	0.97	0.99	1.00	1.02	1.03	1.04	1.05	1.05	
	0.30		0.92	0.95	0.97	0.98	1.00	1.02	1.03	1.04	1.05	
	0.20		0.90	0.93	0.95	0.97	0.99	1.00	1.02	1.03	1.04	
0.00	0.00	0.00	0.88	0.91	0.93	0.94	0.96	0.97	0.97	0.98	0.99	
<p>Rating:4W Photometrically tested without ceiling board.            Multiply UF values by service correction factors            Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>												

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.42	0.35	0.30	0.26	0.21	0.17	0.15	0.11	0.09	
	0.30		0.35	0.30	0.26	0.23	0.19	0.16	0.14	0.11	0.09	
	0.20		0.30	0.26	0.23	0.20	0.17	0.15	0.13	0.10	0.08	
0.50	0.50	0.20	0.40	0.32	0.27	0.23	0.19	0.20	0.13	0.10	0.08	
	0.30		0.33	0.28	0.24	0.21	0.17	0.14	0.12	0.10	0.08	
	0.20		0.29	0.25	0.22	0.19	0.16	0.13	0.12	0.09	0.08	
0.30	0.50	0.20	0.37	0.30	0.25	0.21	0.17	0.14	0.12	0.09	0.07	
	0.30		0.32	0.26	0.22	0.19	0.15	0.13	0.11	0.09	0.07	
	0.20		0.28	0.23	0.20	0.18	0.14	0.12	0.10	0.08	0.07	
0.00	0.00	0.00	0.13	0.10	0.08	0.07	0.05	0.04	0.03	0.03	0.02	
<p>Rating:4W Photometrically tested without ceiling board.            Multiply UF values by service correction factors            Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>												

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 0.75								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.13	0.15	0.16	0.17	0.19	0.20	0.21	0.22	0.22
	0.30		0.10	0.12	0.14	0.15	0.17	0.18	0.19	0.20	0.21
	0.20		0.08	0.10	0.12	0.13	0.15	0.17	0.18	0.19	0.20
0.50	0.50	0.20	0.13	0.14	0.16	0.17	0.18	0.19	0.20	0.21	0.21
	0.30		0.10	0.12	0.13	0.15	0.16	0.18	0.18	0.20	0.20
	0.20		0.08	0.10	0.12	0.13	0.15	0.16	0.17	0.19	0.20
0.30	0.50	0.20	0.12	0.14	0.15	0.16	0.18	0.18	0.19	0.20	0.20
	0.30		0.10	0.12	0.13	0.14	0.16	0.17	0.18	0.19	0.20
	0.20		0.08	0.10	0.12	0.13	0.15	0.16	0.17	0.18	0.19
0.00	0.00	0.00	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
<p>Rating:4W Photometrically tested without ceiling board.            Multiply UF values by service correction factors            Calculate in accordance with CIBSE Technical Memorandum NO.5 1980</p>											

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Zonal Lumen

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	1194.5	1.1	1.1	0.30	0.30
1.0-2.0	1188.7	3.4	4.6	0.90	1.20
2.0-3.0	1176.3	5.6	10.2	1.48	2.68
3.0-4.0	1156.9	7.7	17.9	2.04	4.71
4.0-5.0	1130.7	9.7	27.7	2.56	7.27
5.0-6.0	1097.9	11.5	39.2	3.03	10.30
6.0-7.0	1058.7	13.1	52.3	3.45	13.76
7.0-8.0	1013.7	14.5	66.8	3.81	17.57
8.0-9.0	963.9	15.6	82.5	4.11	21.67
9.0-10.0	910.0	16.5	98.9	4.33	26.00
10.0-11.0	854.1	17.1	116.0	4.49	30.49
11.0-12.0	798.6	17.5	133.5	4.59	35.08
12.0-13.0	742.3	17.6	151.1	4.63	39.71
13.0-14.0	686.3	17.6	168.7	4.62	44.33
14.0-15.0	632.7	17.4	186.0	4.57	48.89
15.0-16.0	580.5	17.0	203.0	4.47	53.36
16.0-17.0	529.1	16.5	219.5	4.33	57.69
17.0-18.0	478.7	15.8	235.3	4.15	61.84
18.0-19.0	429.1	14.9	250.2	3.92	65.77
19.0-20.0	381.8	14.0	264.2	3.67	69.44
20.0-21.0	337.6	13.0	277.2	3.41	72.85
21.0-22.0	295.7	11.9	289.1	3.12	75.97
22.0-23.0	256.1	10.7	299.8	2.82	78.80
23.0-24.0	219.3	9.6	309.4	2.52	81.32
24.0-25.0	185.9	8.5	317.9	2.22	83.54
25.0-26.0	155.8	7.4	325.2	1.93	85.47
26.0-27.0	129.2	6.3	331.5	1.66	87.13
27.0-28.0	106.3	5.4	336.9	1.41	88.55
28.0-29.0	86.7	4.5	341.4	1.19	89.74
29.0-30.0	70.2	3.8	345.2	1.00	90.73
30.0-31.0	57.0	3.2	348.4	0.83	91.57
31.0-32.0	46.3	2.7	351.1	0.70	92.26
32.0-33.0	37.8	2.2	353.3	0.58	92.85
33.0-34.0	31.2	1.9	355.2	0.50	93.35
34.0-35.0	26.3	1.6	356.8	0.43	93.78
35.0-36.0	22.6	1.4	358.3	0.38	94.15

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Zonal Lumen (Continue 1)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	19.7	1.3	359.5	0.34	94.49
37.0-38.0	17.3	1.2	360.7	0.30	94.79
38.0-39.0	15.5	1.1	361.7	0.28	95.07
39.0-40.0	13.9	1.0	362.7	0.26	95.33
40.0-41.0	12.6	0.9	363.6	0.24	95.56
41.0-42.0	11.4	0.8	364.5	0.22	95.78
42.0-43.0	10.5	0.8	365.2	0.20	95.99
43.0-44.0	9.6	0.7	366.0	0.19	96.18
44.0-45.0	8.9	0.7	366.6	0.18	96.36
45.0-46.0	8.2	0.6	367.3	0.17	96.53
46.0-47.0	7.7	0.6	367.9	0.16	96.69
47.0-48.0	7.2	0.6	368.5	0.15	96.84
48.0-49.0	6.7	0.5	369.0	0.14	96.98
49.0-50.0	6.2	0.5	369.5	0.14	97.12
50.0-51.0	5.8	0.5	370.0	0.13	97.25
51.0-52.0	5.3	0.5	370.5	0.12	97.37
52.0-53.0	4.9	0.4	370.9	0.11	97.48
53.0-54.0	4.5	0.4	371.3	0.10	97.59
54.0-55.0	4.2	0.4	371.7	0.10	97.68
55.0-56.0	3.8	0.3	372.0	0.09	97.77
56.0-57.0	3.5	0.3	372.3	0.08	97.86
57.0-58.0	3.2	0.3	372.6	0.08	97.94
58.0-59.0	2.9	0.3	372.9	0.07	98.01
59.0-60.0	2.7	0.3	373.2	0.07	98.07
60.0-61.0	2.4	0.2	373.4	0.06	98.13
61.0-62.0	2.2	0.2	373.6	0.06	98.19
62.0-63.0	2.0	0.2	373.8	0.05	98.24
63.0-64.0	1.9	0.2	374.0	0.05	98.29
64.0-65.0	1.7	0.2	374.2	0.05	98.34
65.0-66.0	1.6	0.2	374.3	0.04	98.38
66.0-67.0	1.5	0.1	374.5	0.04	98.42
67.0-68.0	1.2	0.1	374.6	0.03	98.45
68.0-69.0	1.0	0.1	374.7	0.03	98.48
69.0-70.0	0.8	0.1	374.8	0.02	98.50
70.0-71.0	0.5	0.1	374.8	0.01	98.51
71.0-72.0	0.4	0.0	374.9	0.01	98.52

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Zonal Lumen (Continue 2)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	0.3	0.0	374.9	0.01	98.53
73.0-74.0	0.2	0.0	374.9	0.01	98.53
74.0-75.0	0.1	0.0	374.9	0.00	98.54
75.0-76.0	0.1	0.0	374.9	0.00	98.54
76.0-77.0	0.1	0.0	375.0	0.00	98.54
77.0-78.0	0.0	0.0	375.0	0.00	98.54
78.0-79.0	0.0	0.0	375.0	0.00	98.54
79.0-80.0	0.0	0.0	375.0	0.00	98.54
80.0-81.0	0.0	0.0	375.0	0.00	98.54
81.0-82.0	0.0	0.0	375.0	0.00	98.54
82.0-83.0	0.0	0.0	375.0	0.00	98.55
83.0-84.0	0.0	0.0	375.0	0.00	98.55
84.0-85.0	0.0	0.0	375.0	0.00	98.55
85.0-86.0	0.1	0.0	375.0	0.00	98.55
86.0-87.0	0.0	0.0	375.0	0.00	98.55
87.0-88.0	0.0	0.0	375.0	0.00	98.55
88.0-89.0	0.0	0.0	375.0	0.00	98.55
89.0-90.0	0.0	0.0	375.0	0.00	98.55
90.0-91.0	0.0	0.0	375.0	0.00	98.55
91.0-92.0	0.0	0.0	375.0	0.00	98.55
92.0-93.0	0.0	0.0	375.0	0.00	98.55
93.0-94.0	0.0	0.0	375.0	0.00	98.55
94.0-95.0	0.0	0.0	375.0	0.00	98.55
95.0-96.0	0.0	0.0	375.0	0.00	98.55
96.0-97.0	0.0	0.0	375.0	0.00	98.55
97.0-98.0	0.0	0.0	375.0	0.00	98.55
98.0-99.0	0.0	0.0	375.0	0.00	98.55
99.0-100.0	0.0	0.0	375.0	0.00	98.55
100.0-101.0	0.0	0.0	375.0	0.00	98.55
101.0-102.0	0.0	0.0	375.0	0.00	98.55
102.0-103.0	0.0	0.0	375.0	0.00	98.55
103.0-104.0	0.0	0.0	375.0	0.00	98.55
104.0-105.0	0.0	0.0	375.0	0.00	98.55
105.0-106.0	0.0	0.0	375.0	0.00	98.55
106.0-107.0	0.0	0.0	375.0	0.00	98.55
107.0-108.0	0.0	0.0	375.0	0.00	98.55

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

### Zonal Lumen (Continue 3)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	0.0	0.0	375.0	0.00	98.55
109.0-110.0	0.0	0.0	375.0	0.00	98.55
110.0-111.0	0.0	0.0	375.0	0.00	98.55
111.0-112.0	0.0	0.0	375.0	0.00	98.55
112.0-113.0	0.0	0.0	375.0	0.00	98.55
113.0-114.0	0.0	0.0	375.0	0.00	98.55
114.0-115.0	0.0	0.0	375.0	0.00	98.55
115.0-116.0	0.0	0.0	375.0	0.00	98.55
116.0-117.0	0.0	0.0	375.0	0.00	98.55
117.0-118.0	0.0	0.0	375.0	0.00	98.55
118.0-119.0	0.0	0.0	375.0	0.00	98.55
119.0-120.0	0.0	0.0	375.0	0.00	98.55
120.0-121.0	0.0	0.0	375.0	0.00	98.55
121.0-122.0	0.0	0.0	375.0	0.00	98.55
122.0-123.0	0.0	0.0	375.0	0.00	98.55
123.0-124.0	0.0	0.0	375.0	0.00	98.55
124.0-125.0	0.2	0.0	375.0	0.00	98.56
125.0-126.0	0.3	0.0	375.0	0.01	98.56
126.0-127.0	0.3	0.0	375.1	0.01	98.57
127.0-128.0	0.4	0.0	375.1	0.01	98.58
128.0-129.0	0.4	0.0	375.1	0.01	98.59
129.0-130.0	0.4	0.0	375.2	0.01	98.60
130.0-131.0	0.4	0.0	375.2	0.01	98.61
131.0-132.0	0.6	0.0	375.2	0.01	98.62
132.0-133.0	0.6	0.0	375.3	0.01	98.63
133.0-134.0	0.7	0.1	375.4	0.01	98.65
134.0-135.0	1.0	0.1	375.4	0.02	98.67
135.0-136.0	1.1	0.1	375.5	0.02	98.69
136.0-137.0	1.2	0.1	375.6	0.02	98.71
137.0-138.0	1.4	0.1	375.7	0.03	98.74
138.0-139.0	1.4	0.1	375.8	0.03	98.77
139.0-140.0	1.5	0.1	375.9	0.03	98.80
140.0-141.0	1.7	0.1	376.0	0.03	98.83
141.0-142.0	1.8	0.1	376.2	0.03	98.86
142.0-143.0	1.9	0.1	376.3	0.03	98.89
143.0-144.0	2.0	0.1	376.4	0.03	98.93

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Zonal Lumen (Continue 4)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	2.1	0.1	376.5	0.04	98.96
145.0-146.0	2.2	0.1	376.7	0.04	99.00
146.0-147.0	2.4	0.1	376.8	0.04	99.04
147.0-148.0	2.5	0.1	377.0	0.04	99.07
148.0-149.0	2.7	0.2	377.1	0.04	99.11
149.0-150.0	2.8	0.2	377.3	0.04	99.16
150.0-151.0	2.9	0.2	377.4	0.04	99.20
151.0-152.0	3.0	0.2	377.6	0.04	99.24
152.0-153.0	3.2	0.2	377.8	0.04	99.28
153.0-154.0	3.3	0.2	377.9	0.04	99.32
154.0-155.0	3.4	0.2	378.1	0.04	99.36
155.0-156.0	3.5	0.2	378.2	0.04	99.41
156.0-157.0	3.6	0.2	378.4	0.04	99.45
157.0-158.0	3.8	0.2	378.6	0.04	99.49
158.0-159.0	3.9	0.2	378.7	0.04	99.53
159.0-160.0	4.0	0.2	378.9	0.04	99.57
160.0-161.0	4.0	0.1	379.0	0.04	99.61
161.0-162.0	4.1	0.1	379.2	0.04	99.65
162.0-163.0	4.2	0.1	379.3	0.04	99.68
163.0-164.0	4.3	0.1	379.4	0.03	99.72
164.0-165.0	4.3	0.1	379.6	0.03	99.75
165.0-166.0	4.4	0.1	379.7	0.03	99.78
166.0-167.0	4.4	0.1	379.8	0.03	99.81
167.0-168.0	4.4	0.1	379.9	0.03	99.84
168.0-169.0	4.4	0.1	380.0	0.03	99.87
169.0-170.0	4.5	0.1	380.1	0.02	99.89
170.0-171.0	4.5	0.1	380.2	0.02	99.91
171.0-172.0	4.4	0.1	380.2	0.02	99.93
172.0-173.0	4.5	0.1	380.3	0.02	99.95
173.0-174.0	4.5	0.1	380.4	0.01	99.96
174.0-175.0	4.4	0.0	380.4	0.01	99.97
175.0-176.0	4.3	0.0	380.4	0.01	99.98
176.0-177.0	4.3	0.0	380.5	0.01	99.99
177.0-178.0	4.3	0.0	380.5	0.01	100.00
178.0-179.0	4.3	0.0	380.5	0.00	100.00
179.0-180.0	4.3	0.0	380.5	0.00	100.00

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:



## Candlepower Table

Unit: cd

G\C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G0.0	1202.7	1200.8	1198.7	1194.4	1190.4	1187.6	1202.7	1200.8	1198.7	1194.4
G1.0	1203.1	1201.0	1197.0	1190.6	1184.3	1176.6	1195.2	1194.1	1194.1	1193.9
G2.0	1194.0	1191.5	1187.5	1180.0	1171.0	1161.1	1182.3	1180.7	1182.6	1186.5
G3.0	1176.3	1172.2	1168.3	1161.2	1150.3	1136.1	1166.7	1163.7	1166.0	1176.2
G4.0	1141.9	1142.2	1138.5	1133.8	1120.8	1108.5	1145.0	1140.8	1145.7	1161.9
G5.0	1099.8	1102.2	1106.5	1100.3	1088.9	1073.3	1114.7	1113.6	1118.9	1143.1
G6.0	1051.6	1051.0	1065.0	1059.6	1042.6	1031.1	1081.2	1083.5	1092.2	1117.7
G7.0	1004.0	1001.4	1014.8	1013.6	994.8	985.1	1043.2	1049.3	1059.9	1087.0
G8.0	956.8	949.2	957.8	957.4	943.0	931.2	1004.2	1004.8	1020.3	1049.4
G9.0	903.8	895.3	892.3	903.7	889.5	881.0	961.5	960.9	974.4	1003.3
G10.0	852.9	833.9	833.5	846.9	827.2	828.2	912.7	913.8	913.8	946.6
G11.0	800.9	779.7	773.1	789.7	771.5	774.0	866.8	864.4	857.5	890.4
G12.0	748.5	727.6	715.0	733.3	715.5	714.5	818.2	814.4	800.5	830.5
G13.0	694.0	672.3	654.4	670.4	654.3	659.8	767.6	762.8	746.2	769.9
G14.0	646.3	624.7	600.6	613.8	599.0	607.4	712.5	708.0	687.4	711.5
G15.0	598.5	579.4	548.4	558.7	544.8	557.1	662.5	658.9	636.7	648.5
G16.0	552.8	532.5	495.9	504.6	491.1	503.3	612.7	609.2	587.1	591.8
G17.0	507.6	488.2	447.7	448.0	439.0	454.7	563.1	554.0	537.5	537.5
G18.0	454.7	445.6	400.3	398.6	390.9	405.8	512.5	504.1	487.2	483.6
G19.0	406.5	399.3	363.3	352.5	341.9	358.2	455.3	455.0	434.4	425.9
G20.0	358.5	359.4	328.9	310.9	301.2	314.6	401.0	405.2	390.2	376.1
G21.0	311.3	321.7	296.9	266.3	264.9	270.4	348.0	357.4	350.3	330.2
G22.0	261.9	284.0	262.5	226.5	228.3	233.7	298.4	312.7	311.8	287.6
G23.0	220.8	241.9	232.5	189.6	197.6	199.9	252.4	267.6	273.8	248.3
G24.0	183.6	206.5	203.6	157.0	169.1	170.1	206.7	229.1	234.1	208.5
G25.0	150.8	173.2	176.1	125.8	142.5	141.4	170.3	192.9	200.1	175.5
G26.0	119.6	140.4	148.4	102.3	115.6	118.3	139.2	160.3	167.8	145.6
G27.0	96.5	114.7	125.5	82.9	95.1	98.6	113.5	129.0	140.2	119.3
G28.0	77.1	92.0	104.4	66.4	77.6	81.4	90.5	104.8	113.7	97.4
G29.0	62.4	73.4	86.0	52.1	63.1	65.8	73.5	84.9	93.8	76.3
G30.0	49.4	58.3	69.0	42.1	50.3	54.2	59.9	68.3	76.6	61.2
G31.0	40.6	46.2	56.3	34.6	40.8	45.2	48.7	53.7	62.9	49.4
G32.0	33.4	37.6	45.9	28.8	33.3	37.9	39.2	43.0	51.3	40.0
G33.0	28.0	30.8	37.6	24.5	27.5	31.6	32.5	35.0	41.2	32.2
G34.0	23.9	25.8	30.7	21.8	23.3	26.6	27.5	28.8	34.5	27.4
G35.0	21.0	21.6	25.5	19.5	20.0	22.4	24.1	24.1	29.0	23.8
G36.0	18.8	19.0	21.0	17.7	17.9	19.3	21.7	21.1	24.4	21.2

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G37.0	17.1	17.0	17.4	15.9	16.1	16.7	19.4	19.0	20.5	18.8
G38.0	15.2	15.3	15.0	14.2	14.6	14.9	17.6	17.3	17.9	16.9
G39.0	13.7	13.8	13.4	12.6	13.1	13.7	15.9	15.9	16.3	15.4
G40.0	12.3	12.5	11.9	11.5	12.0	12.4	14.4	14.3	14.6	14.0
G41.0	11.2	11.0	10.8	10.4	10.9	11.6	12.9	12.9	13.3	12.8
G42.0	10.2	10.0	9.8	9.5	10.0	10.6	11.9	11.8	11.9	11.5
G43.0	9.4	9.4	9.1	8.7	9.2	9.9	11.0	10.8	11.0	10.7
G44.0	8.4	8.6	8.5	8.1	8.5	9.1	9.9	9.7	10.0	9.8
G45.0	7.7	7.9	7.8	7.4	7.8	8.6	9.2	9.0	9.4	8.9
G46.0	7.3	7.3	7.3	6.8	7.3	8.0	8.6	8.5	8.7	8.2
G47.0	6.9	6.7	6.9	6.5	6.9	7.6	8.0	7.9	8.2	7.6
G48.0	6.3	6.2	6.5	6.2	6.3	7.3	7.5	7.4	7.6	7.1
G49.0	6.0	5.8	6.0	5.7	6.0	6.8	7.0	6.6	7.1	6.7
G50.0	5.4	5.6	5.5	5.4	5.6	6.5	6.5	6.3	6.7	6.4
G51.0	5.2	5.1	5.2	4.9	4.9	5.9	6.2	5.9	6.0	5.8
G52.0	4.5	4.7	4.7	4.4	4.3	5.4	5.8	5.6	5.7	5.6
G53.0	4.1	4.3	4.3	4.1	3.9	4.8	5.4	5.1	5.4	5.4
G54.0	3.7	4.1	4.1	3.8	3.4	4.6	5.0	4.7	5.0	4.8
G55.0	3.4	3.7	3.8	3.6	3.2	4.3	4.5	4.3	4.6	4.4
G56.0	3.2	3.5	3.3	3.3	3.0	3.9	4.1	3.9	4.2	4.2
G57.0	2.9	3.2	3.0	3.0	2.7	3.7	3.7	3.7	3.9	3.6
G58.0	2.6	3.0	2.7	2.7	2.4	3.1	3.5	3.3	3.6	3.5
G59.0	2.4	2.7	2.6	2.6	2.2	2.8	3.1	3.0	3.2	3.2
G60.0	2.3	2.2	2.4	2.2	2.3	2.4	3.0	2.8	2.8	3.0
G61.0	2.1	2.0	2.3	1.9	1.9	2.1	2.8	2.6	2.7	2.7
G62.0	1.9	2.0	1.9	1.8	1.8	1.8	2.6	2.5	2.2	2.4
G63.0	1.9	1.9	2.0	1.5	1.5	1.6	2.4	2.2	2.2	2.2
G64.0	1.7	1.7	1.9	1.7	1.5	1.4	2.2	1.8	2.0	1.9
G65.0	1.3	1.6	1.8	1.3	1.4	1.3	2.1	1.7	1.9	1.8
G66.0	1.4	1.4	1.6	1.3	1.2	1.2	1.9	1.5	1.9	1.7
G67.0	1.3	1.3	1.3	1.2	1.1	1.0	1.9	1.5	1.6	1.6
G68.0	1.2	0.0	1.3	1.1	1.2	0.0	1.7	1.3	1.6	1.4
G69.0	0.0	1.0	1.1	1.0	0.0	0.0	1.5	1.2	1.3	1.3
G70.0	0.0	0.0	1.0	0.0	0.0	0.0	1.3	1.2	1.2	1.2
G71.0	0.0	0.0	0.0	0.0	0.0	0.0	1.3	1.0	1.0	1.1
G72.0	0.0	0.0	1.0	1.1	0.0	0.0	1.4	0.0	0.0	1.0
G73.0	0.0	0.0	0.0	0.0	0.0	0.0	1.2	0.0	1.1	1.0

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G74.0	0.0	0.0	0.0	0.0	0.0	0.0	1.2	0.0	0.0	0.0
G75.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1	0.0	0.0	0.0
G76.0	0.0	0.0	0.0	0.0	0.0	0.0	1.2	0.0	1.0	0.0
G77.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G78.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G79.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G80.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G81.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G82.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	0.0	0.0	0.0
G83.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G84.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G85.0	0.0	0.0	0.0	0.0	0.0	0.0	1.1	0.0	0.0	0.0
G86.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	0.0	0.0	0.0
G87.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G88.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G89.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G91.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G92.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G93.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G94.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G95.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G96.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G97.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G98.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G99.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G101.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G102.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G103.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G104.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G105.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G106.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G107.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G108.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G109.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G110.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 3)

Unit: cd

G/C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G111.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G112.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G113.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G114.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G115.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G116.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G117.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G118.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G119.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G120.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G121.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G122.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G123.0	0.0	0.0	0.0	0.0	1.0	0.0	0.0	0.0	0.0	0.0
G124.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G125.0	0.0	0.0	0.0	0.0	1.0	0.0	0.0	3.6	0.0	0.0
G126.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.6	0.0	0.0
G127.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	3.4	0.0	0.0
G128.0	0.0	0.0	0.0	0.0	0.0	0.0	1.0	3.5	0.0	1.0
G129.0	0.0	0.0	0.0	0.0	1.0	0.0	0.0	3.5	0.0	0.0
G130.0	0.0	0.0	0.0	1.0	0.0	0.0	0.0	3.6	0.0	0.0
G131.0	0.0	0.0	0.0	1.1	1.2	0.0	0.0	3.5	0.0	0.0
G132.0	0.0	0.0	0.0	1.0	1.0	0.0	1.0	3.6	0.0	1.0
G133.0	0.0	0.0	0.0	0.0	1.0	0.0	0.0	3.8	0.0	1.0
G134.0	0.0	0.0	0.0	1.0	1.3	0.0	1.1	3.7	0.0	1.1
G135.0	1.1	1.0	0.0	1.2	1.2	1.0	1.0	3.8	0.0	1.2
G136.0	0.0	1.0	0.0	1.5	1.4	0.0	1.1	3.9	1.0	1.1
G137.0	1.0	1.1	1.0	1.3	1.4	1.0	1.1	4.0	1.0	1.5
G138.0	1.1	1.2	1.2	1.4	1.6	1.1	1.4	4.1	1.1	1.4
G139.0	1.2	1.3	1.2	1.5	1.7	1.3	1.4	3.7	1.2	1.5
G140.0	1.3	1.2	1.6	1.8	1.8	1.3	1.3	3.4	1.3	1.5
G141.0	1.4	1.5	1.5	2.0	1.9	1.5	1.5	3.6	1.5	1.5
G142.0	1.5	1.6	1.8	2.2	1.9	1.6	1.7	3.8	1.5	1.7
G143.0	1.5	1.7	2.0	2.1	2.0	1.6	1.8	4.0	1.7	1.8
G144.0	1.5	2.0	2.0	2.3	2.2	1.6	1.8	4.1	1.8	1.8
G145.0	2.0	2.0	2.2	2.4	2.3	1.8	2.1	4.3	1.9	1.9
G146.0	2.0	2.3	2.4	2.5	2.4	1.9	2.1	4.3	1.9	2.1
G147.0	2.2	2.4	2.3	2.5	2.7	2.0	2.3	4.9	2.1	2.2

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 4)

Unit: cd

G/C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G148.0	2.3	2.7	2.6	2.6	2.9	2.3	2.3	4.6	2.4	2.3
G149.0	2.3	2.7	2.8	2.8	3.0	2.6	2.7	4.5	2.5	2.6
G150.0	2.5	2.7	2.9	3.0	3.1	2.5	2.7	4.9	2.6	2.6
G151.0	2.6	2.8	3.0	2.8	3.2	2.7	2.8	5.3	2.5	2.7
G152.0	2.9	2.9	3.0	3.0	3.3	2.8	2.9	5.5	2.7	2.8
G153.0	3.0	3.1	3.2	3.1	3.5	3.0	3.1	5.4	2.8	3.0
G154.0	3.0	3.3	3.5	3.1	3.6	3.0	3.1	5.6	3.0	3.1
G155.0	3.1	3.3	3.4	3.4	3.9	3.3	3.2	5.7	3.2	3.1
G156.0	3.3	3.4	3.5	3.4	3.7	3.3	3.4	5.8	3.2	3.4
G157.0	3.3	3.7	3.7	3.6	3.8	3.6	3.6	5.9	3.4	3.6
G158.0	3.5	3.7	3.7	3.7	3.9	3.7	3.6	6.1	3.5	3.7
G159.0	3.6	3.8	3.7	3.7	4.1	3.8	3.8	5.9	3.6	3.8
G160.0	3.6	3.9	4.0	3.9	4.2	3.9	3.7	5.8	3.8	3.8
G161.0	3.9	3.8	3.9	3.7	4.3	4.0	3.9	5.9	3.7	3.8
G162.0	3.8	4.1	4.2	4.0	4.3	4.0	4.0	6.3	3.8	4.0
G163.0	3.8	4.1	4.2	3.9	4.3	4.1	4.0	6.6	3.9	4.1
G164.0	3.9	4.1	4.1	4.1	4.4	4.1	4.0	6.8	4.0	4.1
G165.0	3.9	4.1	4.3	4.2	4.4	4.1	4.0	6.7	4.2	4.1
G166.0	4.0	4.0	4.3	4.2	4.4	4.2	4.1	7.0	4.3	4.2
G167.0	4.0	3.9	4.3	4.1	4.3	4.1	4.3	7.2	4.2	4.4
G168.0	3.9	4.0	4.3	4.3	4.5	4.3	4.3	7.1	4.2	4.3
G169.0	4.1	4.2	4.3	4.3	4.3	4.2	4.4	7.2	4.3	4.3
G170.0	3.9	4.2	4.3	4.3	4.3	4.3	4.6	7.3	4.3	4.4
G171.0	4.1	4.1	4.3	4.1	4.4	4.2	4.4	7.1	4.2	4.3
G172.0	3.9	4.1	4.3	4.0	4.4	4.3	4.4	7.2	4.2	4.4
G173.0	4.0	4.1	4.4	4.2	4.6	4.2	4.4	7.1	4.3	4.3
G174.0	4.0	4.0	4.3	4.2	4.4	4.1	4.3	7.2	4.3	4.2
G175.0	4.2	4.2	4.4	4.3	4.4	4.2	4.4	4.1	4.2	4.2
G176.0	4.1	4.2	4.3	4.3	4.5	4.1	4.4	4.2	4.4	4.3
G177.0	4.1	4.3	4.4	4.3	4.4	4.1	4.4	4.4	4.2	4.5
G178.0	4.0	4.3	4.2	4.3	4.6	3.9	4.4	4.3	4.2	4.6
G179.0	4.0	4.3	4.3	4.3	4.5	4.1	4.4	4.4	4.2	4.2
G180.0	4.1	4.3	4.3	4.3	4.4	4.3	4.4	4.2	4.2	4.5

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 5)

Unit: cd

G\C	C300.0	C330.0	C360.0							
G0.0	1190.4	1187.6	1202.7							
G1.0	1194.2	1195.8	1203.1							
G2.0	1193.2	1199.5	1194.0							
G3.0	1187.9	1197.1	1176.3							
G4.0	1178.2	1187.3	1141.9							
G5.0	1162.2	1169.9	1099.8							
G6.0	1138.3	1141.7	1051.6							
G7.0	1103.5	1096.8	1004.0							
G8.0	1058.4	1043.5	956.8							
G9.0	1006.0	986.8	903.8							
G10.0	943.4	929.5	852.9							
G11.0	884.5	864.5	800.9							
G12.0	824.3	807.0	748.5							
G13.0	764.9	748.7	694.0							
G14.0	702.2	693.1	646.3							
G15.0	644.9	639.4	598.5							
G16.0	588.9	583.7	552.8							
G17.0	533.0	534.2	507.6							
G18.0	474.8	486.0	454.7							
G19.0	424.4	437.8	406.5							
G20.0	376.4	386.5	358.5							
G21.0	331.3	345.3	311.3							
G22.0	288.4	307.6	261.9							
G23.0	246.2	273.0	220.8							
G24.0	212.3	239.1	183.6							
G25.0	181.3	211.9	150.8							
G26.0	152.7	186.4	119.6							
G27.0	125.4	162.6	96.5							
G28.0	103.1	140.0	77.1							
G29.0	83.5	116.7	62.4							
G30.0	67.0	97.7	49.4							
G31.0	53.9	80.9	40.6							
G32.0	42.3	66.2	33.4							
G33.0	34.4	52.3	28.0							
G34.0	28.9	42.5	23.9							
G35.0	24.3	34.4	21.0							
G36.0	20.9	28.6	18.8							

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 6)

Unit: cd

G\C	C300.0	C330.0	C360.0						
G37.0	18.7	23.8	17.1						
G38.0	16.8	19.6	15.2						
G39.0	15.2	17.0	13.7						
G40.0	13.6	15.2	12.3						
G41.0	12.5	13.6	11.2						
G42.0	11.4	12.3	10.2						
G43.0	10.4	11.2	9.4						
G44.0	9.6	10.4	8.4						
G45.0	8.9	9.6	7.7						
G46.0	8.1	8.9	7.3						
G47.0	7.6	8.1	6.9						
G48.0	7.0	7.5	6.3						
G49.0	6.6	7.0	6.0						
G50.0	6.1	6.3	5.4						
G51.0	5.8	5.9	5.2						
G52.0	5.3	5.5	4.5						
G53.0	4.8	4.9	4.1						
G54.0	4.4	4.3	3.7						
G55.0	4.1	3.8	3.4						
G56.0	3.6	3.5	3.2						
G57.0	3.5	3.2	2.9						
G58.0	3.0	3.0	2.6						
G59.0	2.8	2.8	2.4						
G60.0	2.7	2.6	2.3						
G61.0	2.4	2.6	2.1						
G62.0	2.1	2.3	1.9						
G63.0	2.1	2.1	1.9						
G64.0	1.9	2.0	1.7						
G65.0	1.6	1.8	1.3						
G66.0	1.6	1.7	1.4						
G67.0	1.4	1.6	1.3						
G68.0	1.2	1.3	1.2						
G69.0	1.3	1.2	0.0						
G70.0	1.0	1.2	0.0						
G71.0	0.0	0.0	0.0						
G72.0	0.0	0.0	0.0						
G73.0	0.0	0.0	0.0						

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:

## Candlepower Table (Continue 7)

Unit: cd

G\C	C300.0	C330.0	C360.0							
G74.0	0.0	0.0	0.0							
G75.0	0.0	0.0	0.0							
G76.0	0.0	0.0	0.0							
G77.0	0.0	0.0	0.0							
G78.0	0.0	0.0	0.0							
G79.0	0.0	0.0	0.0							
G80.0	0.0	0.0	0.0							
G81.0	0.0	0.0	0.0							
G82.0	0.0	0.0	0.0							
G83.0	0.0	0.0	0.0							
G84.0	0.0	0.0	0.0							
G85.0	0.0	0.0	0.0							
G86.0	0.0	0.0	0.0							
G87.0	0.0	0.0	0.0							
G88.0	0.0	0.0	0.0							
G89.0	0.0	0.0	0.0							
G90.0	0.0	0.0	0.0							
G91.0	0.0	0.0	0.0							
G92.0	0.0	0.0	0.0							
G93.0	0.0	0.0	0.0							
G94.0	0.0	0.0	0.0							
G95.0	0.0	0.0	0.0							
G96.0	0.0	0.0	0.0							
G97.0	0.0	0.0	0.0							
G98.0	0.0	0.0	0.0							
G99.0	0.0	0.0	0.0							
G100.0	0.0	0.0	0.0							
G101.0	0.0	0.0	0.0							
G102.0	0.0	0.0	0.0							
G103.0	0.0	0.0	0.0							
G104.0	0.0	0.0	0.0							
G105.0	0.0	0.0	0.0							
G106.0	0.0	0.0	0.0							
G107.0	0.0	0.0	0.0							
G108.0	0.0	0.0	0.0							
G109.0	0.0	0.0	0.0							
G110.0	0.0	0.0	0.0							

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 11.573 m [K=1.0000]

Humidity:

Inspector:



### Candlepower Table (Continue 8)

Unit: cd

G\C	C300.0	C330.0	C360.0						
G111.0	0.0	0.0	0.0						
G112.0	0.0	0.0	0.0						
G113.0	0.0	0.0	0.0						
G114.0	0.0	0.0	0.0						
G115.0	0.0	0.0	0.0						
G116.0	0.0	0.0	0.0						
G117.0	0.0	0.0	0.0						
G118.0	0.0	0.0	0.0						
G119.0	0.0	0.0	0.0						
G120.0	0.0	0.0	0.0						
G121.0	0.0	0.0	0.0						
G122.0	0.0	0.0	0.0						
G123.0	0.0	0.0	0.0						
G124.0	0.0	0.0	0.0						
G125.0	0.0	0.0	0.0						
G126.0	0.0	0.0	0.0						
G127.0	0.0	0.0	0.0						
G128.0	0.0	0.0	0.0						
G129.0	0.0	0.0	0.0						
G130.0	0.0	0.0	0.0						
G131.0	0.0	0.0	0.0						
G132.0	0.0	1.0	0.0						
G133.0	0.0	0.0	0.0						
G134.0	1.1	1.0	0.0						
G135.0	1.1	1.0	1.1						
G136.0	1.1	1.2	0.0						
G137.0	1.0	1.0	1.0						
G138.0	1.0	0.0	1.1						
G139.0	1.1	1.0	1.2						
G140.0	1.1	1.3	1.3						
G141.0	1.4	1.3	1.4						
G142.0	1.3	1.5	1.5						
G143.0	1.5	1.6	1.5						
G144.0	1.5	1.5	1.5						
G145.0	1.8	1.9	2.0						
G146.0	1.8	1.9	2.0						
G147.0	1.9	1.9	2.2						

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector:

## Candlepower Table (Continue 9)

Unit: cd

G\C	C300.0	C330.0	C360.0						
G148.0	2.1	2.1	2.3						
G149.0	2.3	2.2	2.3						
G150.0	2.4	2.2	2.5						
G151.0	2.5	2.5	2.6						
G152.0	2.7	2.7	2.9						
G153.0	2.9	2.7	3.0						
G154.0	3.0	2.7	3.0						
G155.0	3.1	3.0	3.1						
G156.0	3.2	3.2	3.3						
G157.0	3.3	3.2	3.3						
G158.0	3.4	3.3	3.5						
G159.0	3.6	3.5	3.6						
G160.0	3.9	3.5	3.6						
G161.0	3.9	3.5	3.9						
G162.0	4.0	3.6	3.8						
G163.0	4.2	3.8	3.8						
G164.0	3.9	3.9	3.9						
G165.0	4.0	3.9	3.9						
G166.0	4.1	4.0	4.0						
G167.0	4.2	3.7	4.0						
G168.0	4.2	3.8	3.9						
G169.0	4.2	3.8	4.1						
G170.0	4.3	3.8	3.9						
G171.0	4.2	3.9	4.1						
G172.0	4.3	4.1	3.9						
G173.0	4.4	4.0	4.0						
G174.0	4.5	4.2	4.0						
G175.0	4.3	4.1	4.2						
G176.0	4.3	4.1	4.1						
G177.0	4.5	4.1	4.1						
G178.0	4.4	4.1	4.0						
G179.0	4.3	4.2	4.0						
G180.0	4.6	4.7	4.1						

C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature:  
 Operator:

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 11.573 m [K=1.0000]  
 Humidity:  
 Inspector: