

Type:

Model:

ZEPHYR Brass Adjustable Gimbal Well Light with Rock Guard

ORDERING CODE:

490067

Available Q1 | 2023

SPECIFICATIONS

HOUSING:

Derived from the original Bentley well light, the Zephyr features a cast brass faceplate with rock guard. (Opens with 3 mm hex key.) Composite body. Aluminum gimbal.

FINISH:

Weathered brass. Custom powder coated colors available.

SOCKET/LAMP HOLDER:

One ceramic GU5.3 bi-pin socket with stainless steel retaining springs, on an adjustable gimbal, accepts MR16 lamps with G4 or GY6.35 bases.

LENS:

Flat tempered glass.

LAMP TYPE:

12V MR16. LED recommended. Halogen 30W maximum or 7W LED maximum.

MOUNTING:

Installs in-grade.

WIRING:

Pre-wired with 5' pigtail of 18/2 cable.


WARRANTY:

Lifetime.



The Zephyr well light has an easily adjustable gimbal mechanism that allows precise aiming of the lamp for angled uplighting. Cast brass faceplate with a gasketed heavy-duty composite body. Perfect for spotlighting signs and statuary, as well as for dramatic effects of tree shadows projected against walls.

DIMENSIONS:

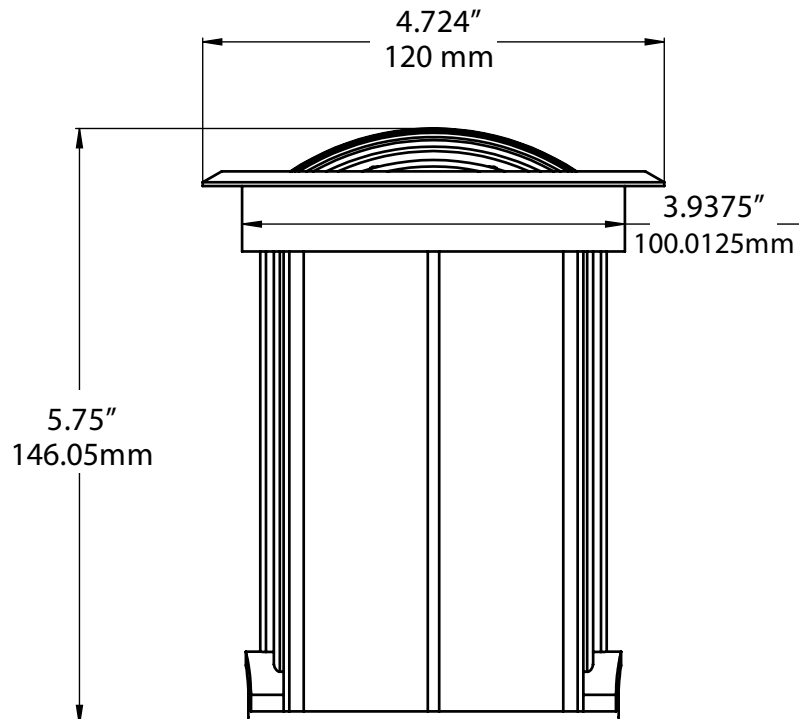

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 120°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K.
Decorative color light options include amber, blue, green, red and purple.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490067-MR16-4W-25-2700K



| FIXTURE | LAMP | | |
|---------|---------|------------------------------|----------------------------|
| | WATTAGE | BEAM SPREAD | COLOR TEMP. |
| 490067 | 2W | 25° / 40° / 60° / 100° | 2700K / 3000K |
| | 3W | 25° / 40° / 60° | 2700K / 3000K |
| | 4W | 25° / 40° / 60° / 100° | 2700K / 3000K |
| | 5W | 15° / 25° / 40° / 60° / 100° | 2700K / 3000K |
| | | 25° | Amber / Blue / Green / Red |
| | 5W | 38° | Purple |
| | 6W | 25° / 40° / 60° | 2700K / 3000K |
| | 7W | 15° / 30° / 45° / 60° / 120° | 2700K / 3000K |