

Type:

Model:

## BODACIOUS Integrated LED Downlight

### SPECIFICATIONS

**VOLTAGE:**

12V AC/DC

**HOUSING:**

Cast brass with removable 3" shroud. Optional 6" shroud available.

**FINISH:**

Weathered brass. Custom powder coated colors available.

**LENS:**

Tempered glass.

**MOUNTING:**

Threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes or mounting accessories. Heavy-duty composite stake included.

**WIRING:**

Pre-wired with a five-foot pigtail of 18/2 cable.

**WARRANTY:**

10-year warranty

Opt. 6" extended shroud  
3W & 6W  
#490260





Opt. 6" extended shroud  
8W, 12W & 16W  
#490261



The Bodacious downlight features an integrated LED source available in 3, 6, 8, 12 or 16 watts. 2700K, 3000K and 5000K options. 30-, 45-, 65- and 100-degree beam spreads.

### DIMENSIONS:

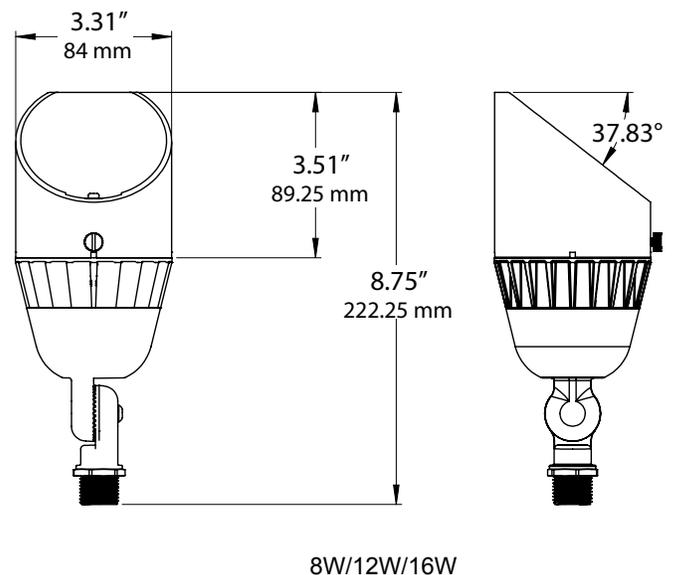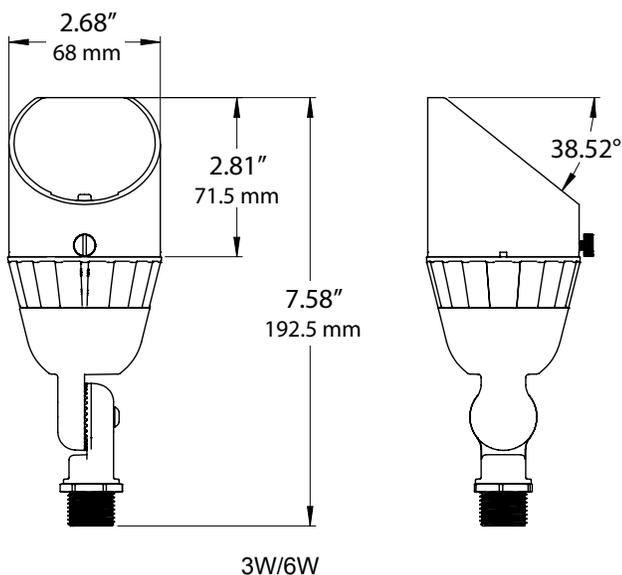

LED LAMP SPECIFICATIONS

**LAMP TYPE:**

Integrated LED.

**OPTICS:**

Integral optics providing available beam spread of 30°, 45°, 65° and 100°

**COLOR TEMPERATURES:**

Color temperature options provide the following qualities:  
2700K, 3000K and 5000K.

**FIXTURE ORDERING INFORMATION**

To order a fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490020-490261-490039-PM



CODES	WATTAGE	VOLT AMPS	BEAM SPREAD	COLOR TEMP	LUMENS	EFFICACY	CRI	SHROUD	MOUNTING
490200	3W	4.83VA	30°	2700K	291lm	88lm/W	70	490260	<b>MY</b> Y-bracket surface mount - 490045
490201	3W	5.04VA	45°	2700K	275lm	78lm/W	70	Extended	<b>TH9</b> Tree Hugger Strap Kit 9"- Max 14" - 490330
490202	3W	4.86VA	65°	2700K	246lm	72lm/W	70	Shroud	<b>TH15</b> Tree Hugger Strap Kit 15"- Max 22.5" - 490331
490203	3W	5.12VA	100°	2700K	217lm	61lm/W	70	3W/6W	<b>TH24</b> Tree Hugger Strap Kit 24"- Max 31.5" - 490332
490204	3W	5.15VA	30°	3000K	306lm	94lm/W	70	490261	<b>TH36</b> Tree Hugger Strap Kit 36"- Max 46.5" - 490333
490205	3W	5.03VA	45°	3000K	278lm	85lm/W	70	Extended	<b>TH48</b> Tree Hugger Strap Kit 48"- Max 61.5" - 490334
490206	3W	5.01VA	65°	3000K	255lm	79lm/W	70	Shroud	<b>TM</b> Tree Mount - 490046
490207	3W	5.08VA	100°	3000K	248lm	69lm/W	70	8W/12W/16W	<b>N</b> Newhouse Brass Tree Mount J-Box - 490060
490208	6W	10.05VA	30°	2700K	389lm	77lm/W	70		<b>MSM</b> Brass Micro Surface Mount - 490049
490209	6W	9.77VA	45°	2700K	426lm	66lm/W	70		<b>EM</b> Round Electrical Mounting Plate 490043
490210	6W	9.89VA	65°	2700K	357lm	63lm/W	70		<b>RMP</b> Rectangular Electrical Mounting Plate 490044
490211	6W	9.98VA	100°	2700K	332lm	55lm/W	70		
490212	6W	10.04VA	30°	3000K	380lm	73lm/W	70		
490213	6W	9.99VA	45°	3000K	455lm	69lm/W	70		
490214	6W	9.78VA	65°	3000K	397lm	60lm/W	70		
490215	6W	9.96VA	100°	3000K	357lm	55lm/W	70		
490216	8W	10.30VA	30°	2700K	862lm	101lm/W	70		

CONTINUED FROM PREVIOUS PAGE

CODES	WATTAGE	VOLT AMPS	BEAM SPREAD	COLOR TEMP	LUMENS	EFFICACY	CRI	SHROUD	MOUNTING
490217	8W	10.29VA	45°	2700K	796lm	94lm/W	70	490260	<b>MY</b> Y-bracket surface mount - 490045
490218	8W	10.28VA	65°	2700K	608lm	72lm/W	70	Extended	<b>TH9</b> Tree Hugger Strap Kit 9"- Max 14" - 490330
490219	8W	10.26VA	100°	2700K	515lm	61lm/W	70	Shroud	<b>TH15</b> Tree Hugger Strap Kit 15"- Max 22.5" - 490331
490220	8W	10.14VA	30°	3000K	823lm	98lm/W	70	3W/6W	<b>TH24</b> Tree Hugger Strap Kit 24"- Max 31.5" - 490332
490221	8W	10.13VA	45°	3000K	777lm	93lm/W	70	490261	<b>TH36</b> Tree Hugger Strap Kit 36"- Max 46.5" - 490333
490222	8W	10.10VA	65°	3000K	592lm	71lm/W	70	Extended	<b>TH48</b> Tree Hugger Strap Kit 48"- Max 61.5" - 490334
490223	8W	10.10VA	100°	3000K	504lm	61lm/W	70	Shroud	<b>TM</b> Tree Mount - 490046
490224	8W	10.53VA	65°	5000K	734lm	84lm/W	70	8W/12W/16W	<b>N</b> Newhouse Brass Tree Mount J-Box - 490060
490225	8W	10.54VA	100°	5000K	600lm	69lm/W	70		<b>MSM</b> Brass Micro Surface Mount - 490049
490226	12W	17.48VA	30°	2700K	1184.62lm	90.36lm/W	70		<b>EM</b> Round Electrical Mounting Plate 490043
490227	12W	17.24VA	45°	2700K	1098.15lm	85.26lm/W	70		<b>RMP</b> Rectangular Electrical Mounting Plate 490044
490228	12W	17.06VA	65°	2700K	869.16lm	68.33lm/W	70		
490229	12W	17.29VA	100°	2700K	698.67lm	53.91lm/W	70		
490230	12W	17.23VA	30°	3000K	1198lm	68.33lm/W	70		
490231	12W	17.51VA	45°	3000K	1127lm	77lm/W	70		
490232	12W	17.62VA	65°	3000K	889lm	65lm/W	70		
490233	12W	17.34VA	100°	3000K	730lm	53lm/W	70		
490234	12W	17.65VA	65°	5000K	973lm	73lm/W	70		
490235	12W	17.90VA	100°	5000K	788lm	59lm/W	70		
490236	16W	21.91VA	30°	2700K	1418.90lm	84.66lm/W	70		
490237	16W	20.79VA	45°	2700K	1263.09lm	79.59lm/W	70		
490238	16W	22.13VA	65°	2700K	1030.69lm	60.7lm/W	70		
490239	16W	21.87VA	100°	2700K	881.77lm	52.58lm/W	70		
490240	16W	22.18VA	30°	3000K	1263.09lm	75lm/W	70		
490241	16W	22.91VA	45°	3000K	1357lm	71lm/W	70		
490242	16W	22.38VA	65°	3000K	1074lm	58lm/W	70		
490243	16W	23.96VA	100°	3000K	886lm	45lm/W	70		
490244	16W	23.21VA	65°	5000K	1231lm	65lm/W	70		
490245	16W	23.28VA	100°	5000K	967lm	51lm/W	70		