

Type:

Model:

BODACIOUS Integrated LED Uplight

SPECIFICATIONS

VOLTAGE:
12V AC/DC

HOUSING:
Cast brass with removable 3" shroud.
Optional 6" shroud available.

FINISH:
Weathered brass. Custom powder coated colors available.

LENS:
Tempered glass.

MOUNTING:
Threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes or mounting accessories.

WIRING:
Pre-wired with a five-foot pigtail of 18/2 cable.

WARRANTY:
10-year warranty

Opt. 6" extended shroud
3W & 6W
#490260





Opt. 6" extended shroud
12W & 16W
#490261



The Bodacious uplight features an integrated LED source available in 3, 6, 12 or 16 watts. 2700K, 3000K and 5000K options. 30-, 45-, 65- and 100-degree beam spreads.

DIMENSIONS:

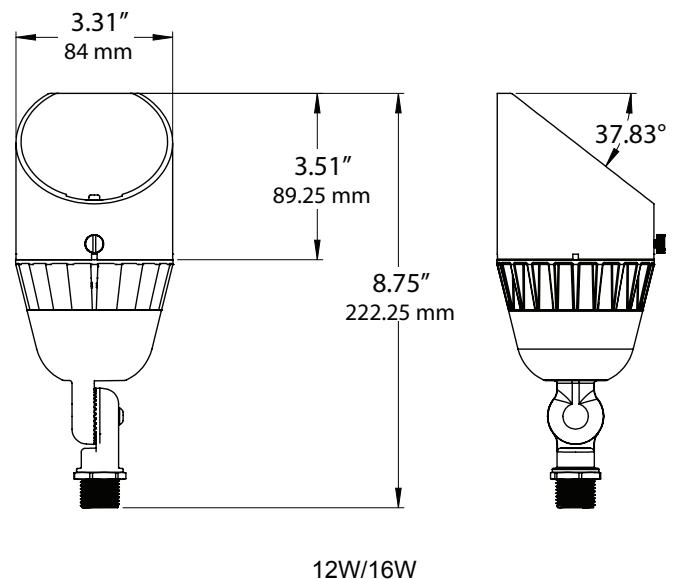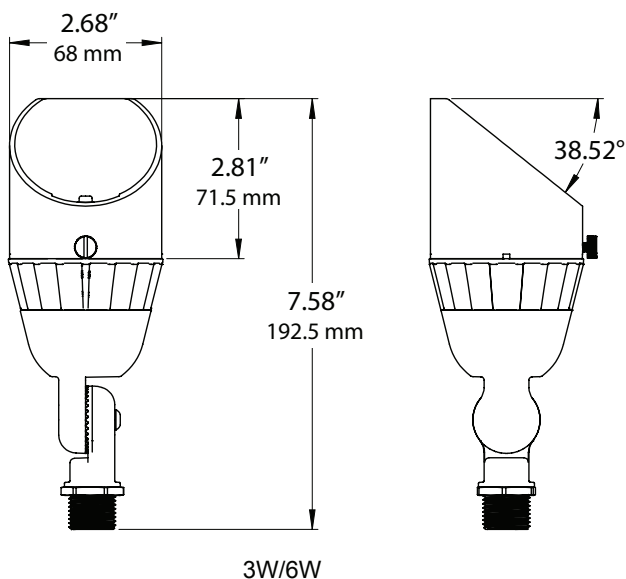

LED LAMP SPECIFICATIONS

LAMP TYPE:

Integrated LED.

OPTICS:

Integral optics providing available beam spread of 30°, 45°, 65° and 100°

COLOR TEMPERATURES:

Color temperature options provide the following qualities:
2700K, 3000K and 5000K.



FIXTURE ORDERING INFORMATION

To order a fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490020-490261-490039-PM

CODES	WATTAGE	VOLT AMPS	BEAM SPREAD	COLOR TEMP	LUMENS	EFFICACY	CRI	SHROUD	RISERS	MOUNTING
490200	3W	4.83VA	30°	2700K	265lm	88lm/W	70	490260	490038	MS Heavy-duty slotted mounting stake (incl.) 490034
490201	3W	5.04VA	45°	2700K	234lm	78lm/W	70	Extended Shroud	2" brass riser	
490202	3W	4.86VA	65°	2700K	217lm	72lm/W	70	3W / 6W	490039	EX Excalibur Post Stake 490037
490203	3W	5.12VA	100°	2700K	184lm	61lm/W	70		3" brass riser	TR Trident HD 3-Prong Stake 490036
490204	3W	5.15VA	30°	3000K	281lm	94lm/W	70	490261		PM Pier Mount 490057
490205	3W	5.03VA	45°	3000K	255lm	85lm/W	70	Extended Shroud	490031	TSM Tapered Surface Mount 490048
490206	3W	5.01VA	65°	3000K	237lm	79lm/W	70	12W / 16W	6" brass riser	
490207	3W	5.08VA	100°	3000K	207lm	69lm/W	70		490032	EM Round Electrical Mounting Plate 490043
490208	6W	10.05VA	30°	2700K	461lm	77lm/W	70		12" brass riser	
490209	6W	9.77VA	45°	2700K	396lm	66lm/W	70			RMP Rectangular Electrical Mounting Plate 490044
490210	6W	9.89VA	65°	2700K	381lm	63lm/W	70		490033	
490211	6W	9.98VA	100°	2700K	330lm	55lm/W	70		24" brass riser	

CONTINUED FROM PREVIOUS PAGE

CODES	WATTAGE	VOLT AMPS	BEAM SPREAD	COLOR TEMP	LUMENS	EFFICACY	CRI	SHROUD	RISERS	MOUNTING
490212	6W	10.04VA	30°	3000K	437lm	73lm/W	70	490260	490038	MS Heavy-duty slotted mounting stake (incl.) 490034
490213	6W	9.99VA	45°	3000K	413lm	69lm/W	70	Extended	2" brass riser	
490214	6W	9.78VA	65°	3000K	362lm	60lm/W	70	Shroud	490039 3" brass riser	EX Excalibur Post Stake 490037
490215	6W	9.96VA	100°	3000K	327lm	55lm/W	70	3W / 6W		
490230	12W	17.23VA	30°	3000K	1018lm	85lm/W	70	490261	490031 6" brass riser	TR Trident HD 3-Prong Stake 490036
490231	12W	17.51VA	45°	3000K	820lm	77lm/W	70	Extended		
490232	12W	17.62VA	65°	3000K	784lm	65lm/W	70	Shroud	490032 12" brass riser	PM Pier Mount 490057
490233	12W	17.34VA	100°	3000K	632lm	53lm/W	70	12W / 16W		
490234	12W	17.65VA	65°	5000K	870lm	73lm/W	70	490033 24" brass riser	490033	TSM Tapered Surface Mount 490048
490235	12W	17.90VA	100°	5000K	710lm	59lm/W	70			
490240	16W	22.18VA	30°	3000K	905lm	75lm/W	70	490033	24" brass riser	EM Round Electrical Mounting Plate 490043
490241	16W	22.91VA	45°	3000K	1140lm	71lm/W	70			
490242	16W	22.38VA	65°	3000K	928lm	58lm/W	70	490033	24" brass riser	RMP Rectangular Electrical Mounting Plate 490044
490243	16W	23.96VA	100°	3000K	738lm	45lm/W	70			
490244	16W	23.21VA	65°	5000K	1040lm	65lm/W	70	490033	24" brass riser	RMP Rectangular Electrical Mounting Plate 490044
490245	16W	23.28VA	100°	5000K	820lm	51lm/W	70			