

SPECIFICATION SHEET

Type:

Model:

WINDSOR LED Wildlife Safe Bi-Pin Path Light

ORDERING CODE:

490016

SPECIFICATIONS

HOUSING:

Cast brass.

FINISH:

Weathered brass. Custom powder-coated colors available.

LENS:

Clear polycarbonate.

SOCKET/LAMP HOLDER:

One fixed ceramic bi-pin socket in stem accepts bi-pin lamps with G4 or GY6.35 bases.

LAMP TYPE:

12V bi-pin. LED recommended. Halogen 35W maximum or 6W LED maximum.

MOUNTING:

1/2" NPT. Heavy-duty composite stake included with stem. May be mounted into threaded hubs in junction boxes or other mounting accessories.

WIRING

Pre-wired with 5' pigtail of 18/2 cable.


WARRANTY:

Lifetime.



The wildlife safe Windsor path light features a 6" diameter cast brass hat. Its underside is a powder-coated reflective white surface.

DIMENSIONS:

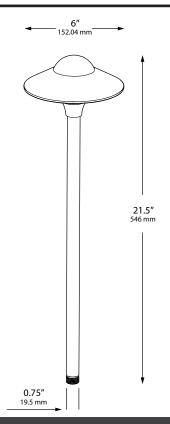



LED LAMP SPECIFICATIONS

LAMP TYPE:

Dauer encapsulated bi-pin with 5-year warranty.

COLOR TEMPERATURES:

Wildlife-approved, amber and red.

These fixtures are only deemed wildlife approved if they utilize a wildlife-approved amber or red bulb as per the chart below.



To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490016-490025-487123-WL-MS



STEM	LAMP					MOUNTING
490025	ORDER NO.	COLOR	DESCRIPTION	WATTAGE	NANOMETER RANGE	MS Composite stake (incl.) 490034
(10")	487123-WL	Amber-WL	Encap. Bi-pin G4	4W	585-595	M3 Trident Heavy-Duty 3-Prong Stake 490036
490023 (16")	487120-WL	Red-WL	Bi-pin G4	3W	610-645	PM Round pier mount 490057
						MR Round tapered 3-hole surface mount 490048
490026 (18")						MP PVC/Brass post stake 490037
	490025 (10") 490023 (16") 490026	490025 (10") 487123-WL 490023 (16") 487120-WL	490025 (10") 487123-WL Amber-WL 490023 (16") 487120-WL Red-WL	490025 (10") 487123-WL Amber-WL Encap. Bi-pin G4 490023 (16") 490026	490025 (10") 487123-WL Amber-WL Encap. Bi-pin G4 4W 490023 (16") 490026 Red-WL Bi-pin G4 3W	490025 (10") 487123-WL Amber-WL Encap. Bi-pin G4 4W 585-595 (16") 490026 NANOMETER RANGE 487120-WL Red-WL Bi-pin G4 3W 610-645