

SPE	CIFI	CATI	ION	SHEE.

Type:

Model:

# ANDROS LED Wildlife Safe Bi-Pin Path Light

# **ORDERING CODE:**

490017

# **SPECIFICATIONS**

#### **HOUSING:**

Cast brass.

# FINISH:

Weathered brass. Custom powder-coated colors available.

### LENS:

Clear polycarbonate.

# **SOCKET/LAMP HOLDER:**

One fixed ceramic bi-pin socket in stem accepts bi-pin lamps with G4 or GY6.35 bases.

#### I AMP TYPE

12V bi-pin. LED recommended. Halogen 35W maximum or 6W LED maximum.

#### MOUNTING:

1/2" NPT. Heavy-duty composite stake included with stem. May be mounted into threaded hubs in junction boxes or other mounting accessories.

#### WIRING:

Pre-wired with 5' pigtail of 18/2 cable.


# **WARRANTY**:

Lifetime.



The wildlife safe Andros path light features an 8.5" diameter cast brass hat. Its underside is a powder-coated reflective white surface.

# **DIMENSIONS:**

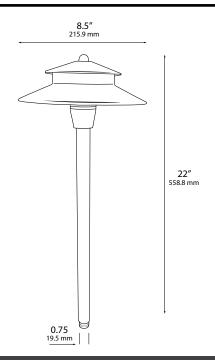



# SPECIFICATION SHEET Page 2 ANDROS Wildlife Safe Bi-Pin Path Light

# LED LAMP SPECIFICATIONS

# **LAMP TYPE:**

Dauer encapsulated bi-pin with 5-year warranty.

# **COLOR TEMPERATURES:**

Wildlife-approved, amber and red.

These fixtures are only deemed wildlife approved if they utilize a wildlife-approved amber or red bulb as per the chart below.



To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 490017-490025-487123-WL-MS



FIXTURE	STEM			LAMP			MOUNTING
490017	490025	ORDER NO.	COLOR	DESCRIPTION	WATTAGE	NANOMETER RANGE	MS Composite stake (incl.) 490034
	(10")	487123-WL	Amber-WL	Encap. Bi-pin G4	4W	585-595	<b>M3</b> Trident Heavy-Duty 3-Prong Stake 490036
	490023	487120-WL	Red-WL	Bi-pin G4	3W	610-645	PM Round pier mount 490057
	(16")						<b>MR</b> Round tapered 3-hole surface mount 490048
	490026 (18")						<b>MP</b> PVC/Brass post stake 490037
	(16)						