
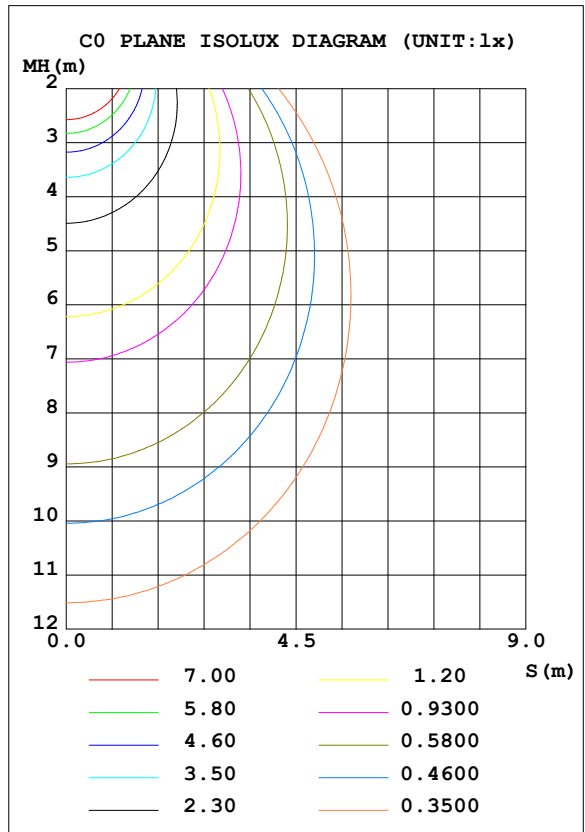


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:11.96V I:0.3410A P:2.722W PF:0.6675 Lamp Flux:1000x1 lm		
NAME: 489925-3000K	TYPE:489925-3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 99.03 lm/W			
MODEL	489925-3000K	Imax (cd)	46.39	S/MH (C0/180)	1.24
NOMINAL POWER (W)	5	LOR (%)	27.0	S/MH (C90/270)	1.22
RATED VOLTAGE (V)	12	TOTAL FLUX (lm)	134.79	η UP, DN (C0-180)	0.0,14.4
NOMINAL FLUX (lm)	500	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,12.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	220	η down (%)	27.0	CIBSE SHR MAX	1.35

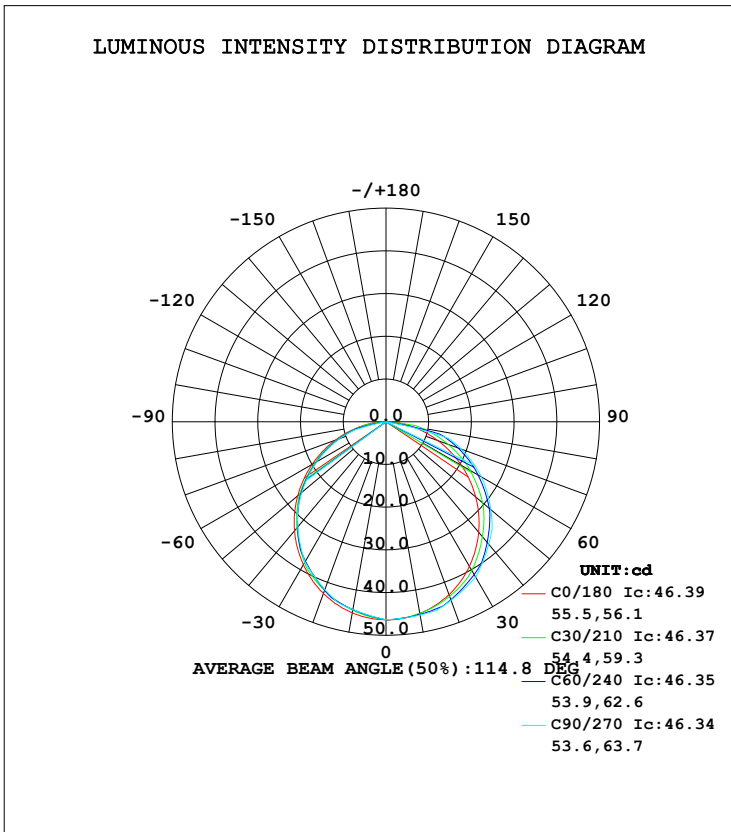

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: LOW  
Temperature:25.3DEG  
Operators:G  
Test Date:2022-05-30

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
Humidity:65.0%  
Test Distance:8.750m [K=1.0000]  
Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
5	46.18	46.12	46.14	46.09	46.11	45.63	45.49	45.67	0- 5	1.102	1.102	0.82,0.22
10	45.58	45.66	45.93	45.58	45.38	44.68	44.63	44.76	5- 10	3.260	4.362	3.24,0.87
15	44.51	45.01	45.73	44.88	44.26	43.53	43.78	43.65	10- 15	5.315	9.676	7.18,1.94
20	43.08	44.17	44.49	43.97	42.81	42.20	41.82	42.36	15- 20	7.201	16.88	12.5,3.38
25	41.27	42.50	43.24	42.31	40.89	40.07	39.87	40.23	20- 25	8.831	25.71	19.1,5.14
30	39.05	40.60	42.00	40.40	38.68	37.68	37.92	37.91	25- 30	10.18	35.89	26.6,7.18
35	36.52	38.59	39.72	38.39	36.11	35.20	35.02	35.44	30- 35	11.21	47.10	34.9,9.42
40	33.77	36.37	37.44	36.18	33.34	32.53	32.12	32.80	35- 40	11.85	58.96	43.7,11.8
45	30.72	33.41	35.15	33.23	30.25	29.25	29.22	29.48	40- 45	12.12	71.08	52.7,14.2
50	27.43	30.48	32.03	30.25	26.99	25.97	25.71	26.13	45- 50	12.02	83.09	61.6,16.6
55	23.97	27.53	28.91	27.31	23.53	22.70	22.21	22.83	50- 55	11.51	94.60	70.2,18.9
60	20.34	23.92	25.79	23.78	19.98	19.00	18.71	19.07	55- 60	10.66	105.3	78.1,21.1
65	16.67	20.42	22.28	20.35	16.29	15.38	15.07	15.42	60- 65	9.502	114.8	85.1,23
70	12.97	16.88	18.78	16.86	12.63	11.84	11.44	11.82	65- 70	8.082	122.8	91.1,24.6
75	9.330	13.31	15.27	13.29	9.059	8.370	7.809	8.276	70- 75	6.476	129.3	95.9,25.9
80	5.895	8.266	0	8.242	5.693	4.375	0	4.249	75- 80	4.145	133.5	99,26.7
85	2.747	0	0	0	0.5473	0	0	0	80- 85	1.210	134.7	99.9,26.9
90	0	0	0	0	0	0	0	0	85- 90	0.1180	134.8	100,27
95									90- 95			
100									95-100			
105									100-105			
110									105-110			
115									110-115			
120									115-120			
125									120-125			
130									125-130			
135									130-135			
140									135-140			
145									140-145			
150									145-150			
155									150-155			
160									155-160			
165									160-165			
170									165-170			
175									170-175			
180									175-180			
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: LOW  
 Temperature:25.3DEG  
 Operators:G  
 Test Date:2022-05-30

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
 Humidity:65.0%  
 Test Distance:8.750m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:11.96V I:0.3410A P:2.722W PF:0.6675 Lamp Flux:1000x1 lm		
NAME: 489925-3000K	TYPE:489925-3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc																0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	.32	.32	.32	.31	.31	.31	.30	.30	.30	.29	.29	.29	.28	.28	.28	.27
1.0	.28	.27	.26	.27	.26	.25	.26	.25	.25	.25	.25	.24	.24	.24	.23	.23
2.0	.24	.22	.21	.24	.22	.21	.23	.21	.20	.22	.21	.20	.21	.20	.19	.19
3.0	.21	.19	.17	.21	.19	.17	.20	.18	.17	.19	.18	.17	.19	.17	.16	.16
4.0	.19	.16	.15	.18	.16	.14	.18	.16	.14	.17	.15	.14	.17	.15	.14	.13
5.0	.17	.14	.13	.16	.14	.12	.16	.14	.12	.15	.14	.12	.15	.13	.12	.11
6.0	.15	.13	.11	.15	.13	.11	.14	.12	.11	.14	.12	.11	.13	.12	.11	.10
7.0	.14	.11	.10	.13	.11	.10	.13	.11	.10	.13	.11	.09	.12	.11	.09	.09
8.0	.12	.10	.09	.12	.10	.09	.12	.10	.08	.12	.10	.08	.11	.10	.08	.08
9.0	.11	.09	.08	.11	.09	.08	.11	.09	.08	.11	.09	.08	.10	.09	.08	.07
10.0	.11	.08	.07	.10	.08	.07	.10	.08	.07	.10	.08	.07	.10	.08	.07	.06

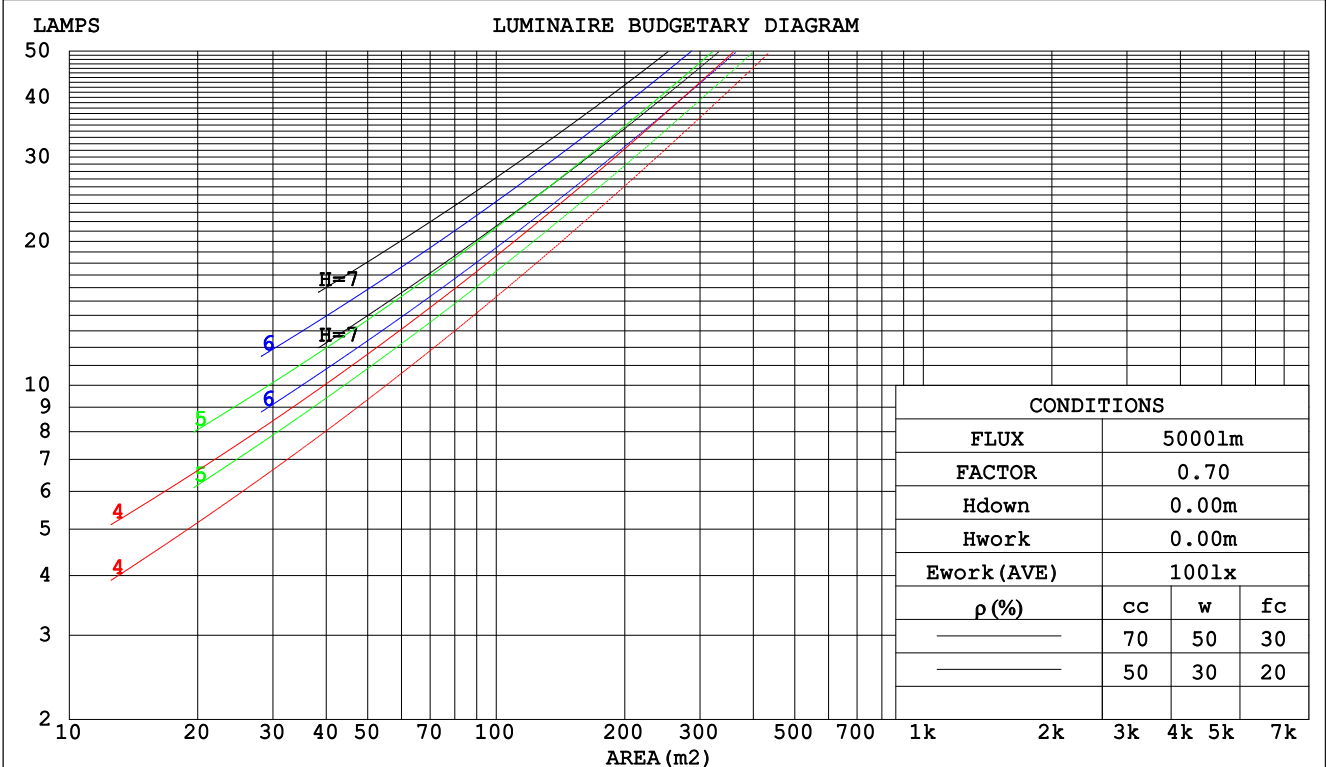

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: LOW  
 Temperature:25.3DEG  
 Operators:G  
 Test Date:2022-05-30

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
 Humidity:65.0%  
 Test Distance:8.750m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:11.96V I:0.3410A P:2.722W PF:0.6675 Lamp Flux:1000x1 lm		
NAME: 489925-3000K	TYPE:489925-3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.083	.047	.015	.081	.046	.015	.077	.044	.014	.074	.043	.014	.071	.041	.013	
2.0	.079	.043	.013	.077	.043	.013	.074	.041	.013	.071	.040	.012	.068	.039	.012	
3.0	.073	.039	.012	.072	.038	.012	.069	.037	.011	.066	.036	.011	.064	.035	.011	
4.0	.068	.035	.010	.066	.035	.010	.064	.034	.010	.062	.033	.010	.059	.032	.010	
5.0	.063	.032	.009	.061	.032	.009	.059	.031	.009	.057	.030	.009	.055	.029	.009	
6.0	.058	.029	.008	.057	.029	.008	.055	.028	.008	.053	.028	.008	.051	.027	.008	
7.0	.054	.027	.008	.053	.026	.008	.051	.026	.007	.050	.025	.007	.048	.025	.007	
8.0	.050	.025	.007	.050	.024	.007	.048	.024	.007	.046	.024	.007	.045	.023	.007	
9.0	.047	.023	.006	.046	.023	.006	.045	.022	.006	.044	.022	.006	.042	.022	.006	
10.0	.044	.021	.006	.044	.021	.006	.042	.021	.006	.041	.020	.006	.040	.020	.006	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.051	.051	.051	.044	.044	.044	.030	.030	.030	.017	.017	.017	.006	.006	.006	
2.0	.046	.036	.026	.040	.031	.023	.027	.021	.016	.016	.012	.009	.005	.004	.003	
3.0	.044	.031	.020	.038	.027	.017	.026	.018	.012	.015	.011	.007	.005	.004	.002	
4.0	.042	.027	.016	.036	.024	.014	.025	.016	.010	.014	.010	.006	.005	.003	.002	
5.0	.040	.024	.013	.035	.021	.011	.024	.015	.008	.014	.009	.005	.004	.003	.002	
6.0	.038	.022	.010	.033	.019	.009	.023	.013	.006	.013	.008	.004	.004	.003	.001	
7.0	.037	.020	.009	.032	.018	.008	.022	.012	.005	.013	.007	.003	.004	.002	.001	
8.0	.035	.019	.008	.030	.016	.007	.021	.011	.005	.012	.007	.003	.004	.002	.001	
9.0	.033	.017	.007	.029	.015	.006	.020	.011	.004	.012	.006	.002	.004	.002	.001	
10.0	.032	.016	.006	.027	.014	.005	.019	.010	.004	.011	.006	.002	.004	.002	.001	

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: LOW  
Temperature:25.3DEG  
Operators:G  
Test Date:2022-05-30

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
Humidity:65.0%  
Test Distance:8.750m [K=1.0000]  
Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:11.96V I:0.3410A P:2.722W PF:0.6675 Lamp Flux:1000x1 lm										
NAME: 489925-3000K					TYPE:489925-3000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.7	9.3	8.0	9.5	9.7	8.7	10.2	8.9	10.4	10.6
3H	9.3	10.7	9.6	11.0	11.2	10.7	12.1	11.0	12.3	12.6
4H	10.0	11.3	10.3	11.6	11.8	11.7	13.0	12.0	13.3	13.5
6H	10.5	11.7	10.8	12.0	12.3	11.8	13.1	12.1	13.4	13.6
8H	10.6	11.9	11.0	12.1	12.4	11.8	13.0	12.1	13.3	13.6
12H	10.8	11.9	11.1	12.2	12.5	11.7	12.9	12.1	13.2	13.5
4H 2H	8.6	10.0	8.9	10.2	10.5	9.3	10.7	9.6	10.9	11.2
3H	10.4	11.6	10.8	11.9	12.2	11.6	12.7	11.9	13.0	13.3
4H	11.2	12.3	11.6	12.6	13.0	12.7	13.8	13.1	14.1	14.4
6H	11.9	12.8	12.3	13.2	13.6	12.9	13.9	13.3	14.2	14.6
8H	12.1	13.0	12.5	13.4	13.8	12.9	13.7	13.3	14.1	14.5
12H	12.3	13.1	12.7	13.5	13.9	12.8	13.6	13.2	14.0	14.4
8H 4H	11.8	12.7	12.2	13.0	13.4	13.0	13.9	13.4	14.3	14.7
6H	12.7	13.4	13.1	13.8	14.3	13.3	14.0	13.7	14.4	14.9
8H	13.1	13.7	13.5	14.2	14.6	13.3	13.9	13.7	14.3	14.8
12H	13.4	13.9	13.9	14.4	14.9	13.2	13.8	13.7	14.2	14.7
12H 4H	11.8	12.6	12.2	13.0	13.4	13.1	13.9	13.5	14.3	14.7
6H	12.7	13.4	13.2	13.8	14.2	13.4	14.0	13.8	14.4	14.9
8H	13.1	13.7	13.6	14.1	14.6	13.3	13.9	13.8	14.3	14.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.3 / - 0.5				

CIE Pub.117 Corrected 500.0 lm Total Lamp Luminous Flux. (8log(F/F0) = -2.4)

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: LOW  
Temperature:25.3DEG  
Operators:G  
Test Date:2022-05-30

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
Humidity:65.0%  
Test Distance:8.750m [K=1.0000]  
Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:11.96V I:0.3410A P:2.722W PF:0.6675 Lamp Flux:1000x1 lm		
NAME: 489925-3000K	TYPE:489925-3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	15	12	10	15	12	10	15	12	10	9
0.80	18	15	13	18	15	13	17	15	13	11
1.00	20	17	15	20	17	15	19	18	15	13
1.25	22	19	17	22	19	17	21	19	17	15
1.50	24	21	19	23	21	19	22	20	19	17
2.00	26	23	21	25	23	21	24	22	21	19
2.50	27	25	23	26	24	23	25	23	22	20
3.00	28	26	24	27	25	24	26	24	23	21
4.00	29	27	26	28	27	26	27	26	25	22
5.00	29	28	27	29	28	27	27	27	26	23
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: LOW  
Temperature:25.3DEG  
Operators:G  
Test Date:2022-05-30

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
Humidity:65.0%  
Test Distance:8.750m [K=1.0000]  
Remarks:

**ISOCANDELA DIAGRAM**

Test:U:11.96V I:0.3410A P:2.722W PF:0.6675 Lamp Flux:1000x1 lm		
NAME: 489925-3000K	TYPE:489925-3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

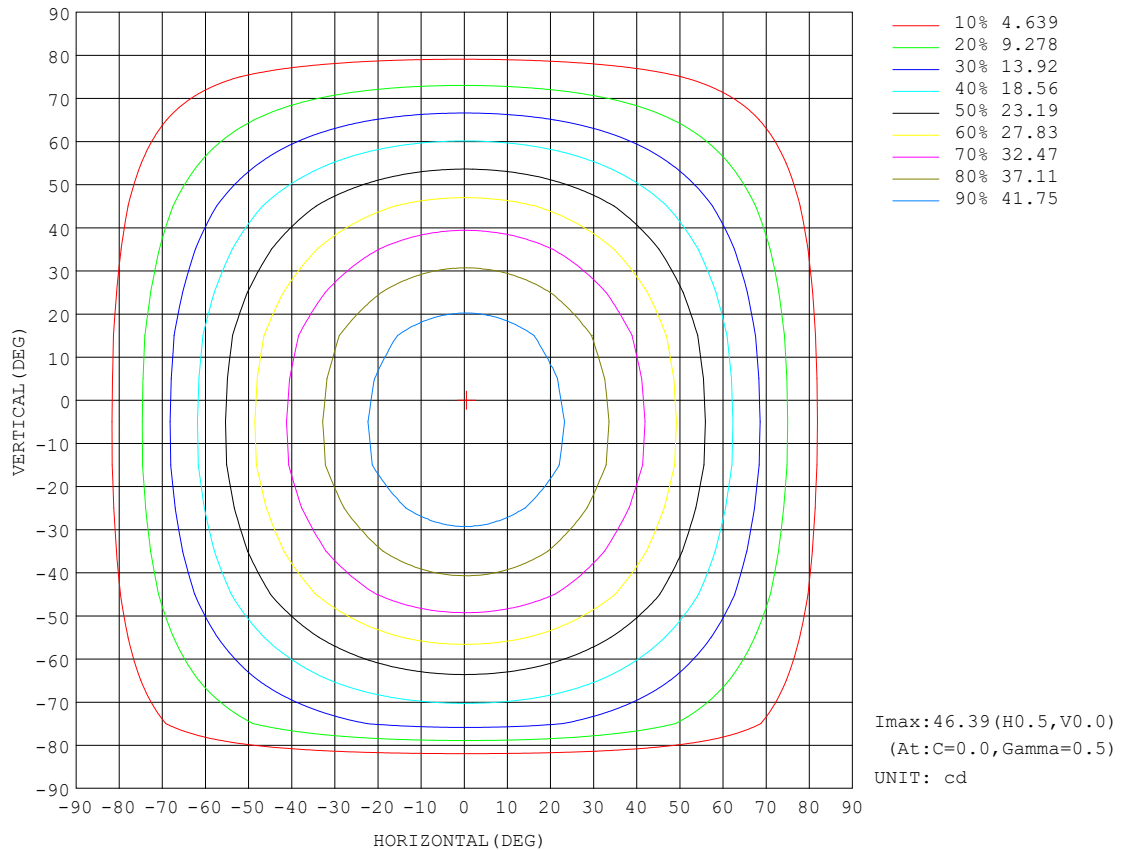


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: LOW  
 Temperature:25.3DEG  
 Operators:G  
 Test Date:2022-05-30

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
 Humidity:65.0%  
 Test Distance:8.750m [K=1.0000]  
 Remarks:

**AAI CURVES**

Test:U:11.96V I:0.3410A P:2.722W PF:0.6675 Lamp Flux:1000x1 lm		
NAME: 489925-3000K	TYPE:489925-3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

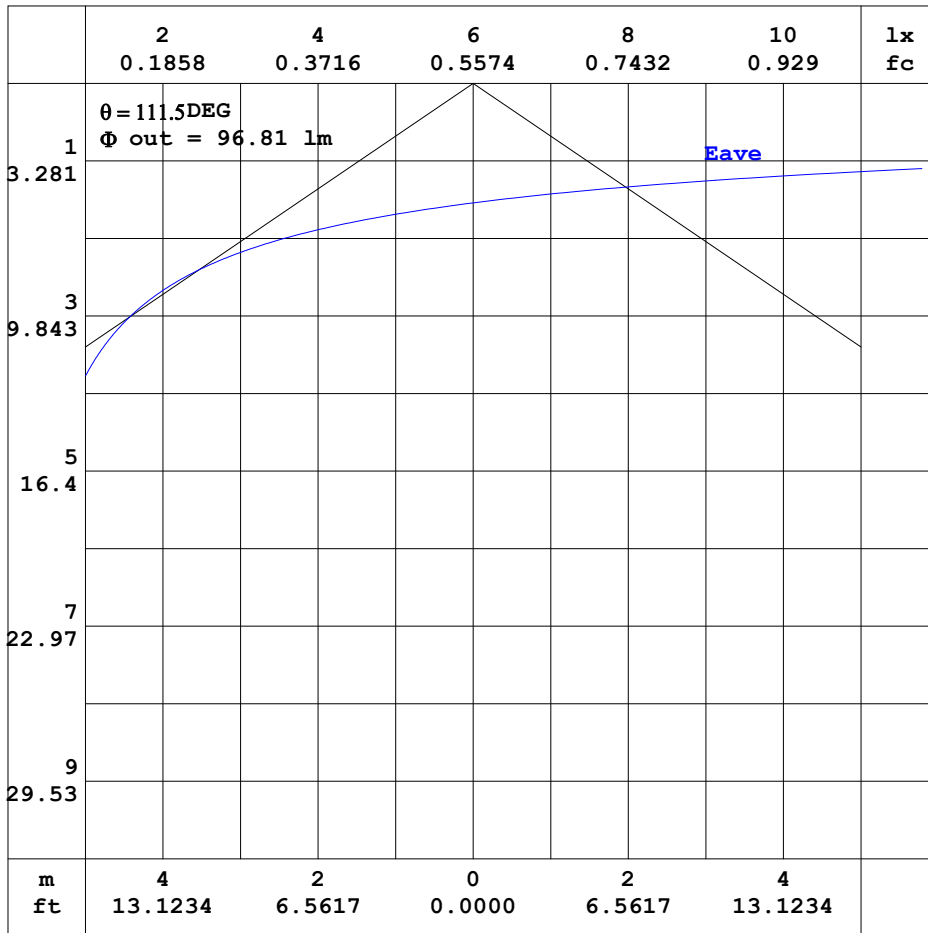

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: LOW  
Temperature:25.3DEG  
Operators:G  
Test Date:2022-05-30

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
Humidity:65.0%  
Test Distance:8.750m [K=1.0000]  
Remarks:



**ISOLUX DIAGRAM**

Test:U:11.96V I:0.3410A P:2.722W PF:0.6675 Lamp Flux:1000x1 lm		
NAME: 489925-3000K	TYPE:489925-3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

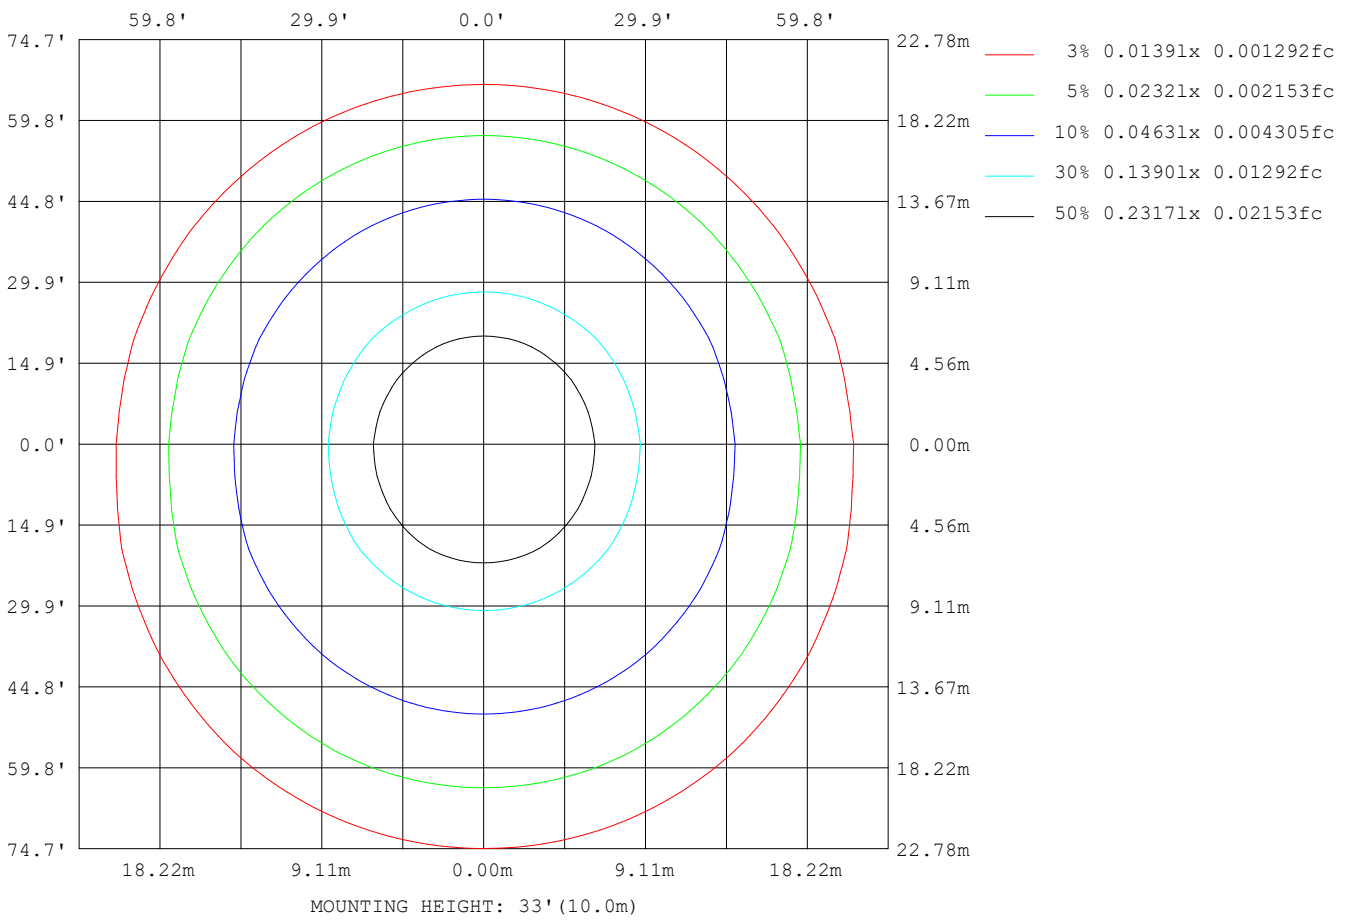

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: LOW  
 Temperature:25.3DEG  
 Operators:G  
 Test Date:2022-05-30

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
 Humidity:65.0%  
 Test Distance:8.750m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:11.96V I:0.3410A P:2.722W PF:0.6675 Lamp Flux:1000x1 lm		
NAME: 489925-3000K	TYPE:489925-3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


AvgL	cd/m2
L_0~180 (65) av	195
L_0~180 (75) av	178
L_0~180 (85) av	94
L_90~270 (65) av	221
L_90~270 (75) av	223
L_90~270 (85) av	0
L_45 (65) av	212
L_45 (75) av	209
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: LOW  
Temperature:25.3DEG  
Operators:G  
Test Date:2022-05-30

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
Humidity:65.0%  
Test Distance:8.750m [K=1.0000]  
Remarks:

**Planar Illuminance Curve**

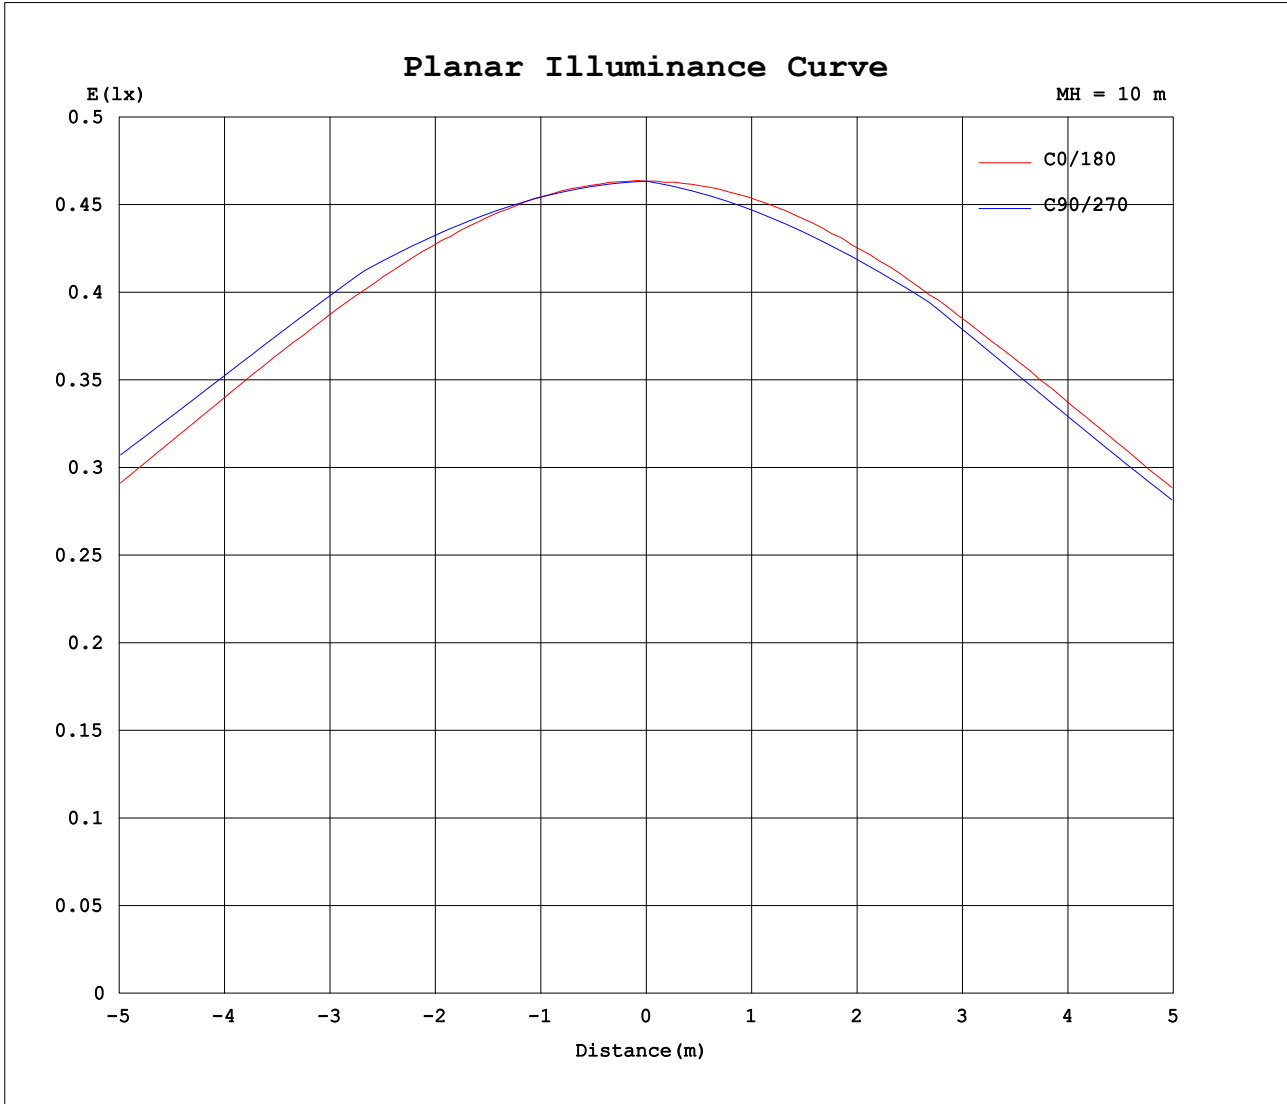

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: LOW  
 Temperature: 25.3DEG  
 Operators: G  
 Test Date: 2022-05-30

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
 Humidity: 65.0%  
 Test Distance: 8.750m [K=1.0000]  
 Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.96V I:0.3410A P:2.722W PF:0.6675 Lamp Flux:1000x1 lm		
NAME: 489925-3000K	TYPE:489925-3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

C (DEG) γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3
5	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.1	46.0
10	45.9	45.9	45.9	45.8	45.8	45.7	45.7	45.6	45.6	45.5	45.5	45.4	45.4	45.4	45.4	45.3	45.4	45.4	45.2
15	45.7	45.6	45.6	45.5	45.4	45.3	45.1	45.0	44.9	44.7	44.6	44.5	44.4	44.3	44.3	44.2	44.2	44.3	44.1
20	44.5	44.4	44.4	44.4	44.3	44.2	44.2	44.1	44.0	43.7	43.5	43.3	43.1	42.9	42.8	42.8	42.8	42.8	42.6
25	43.3	43.2	43.1	43.0	42.9	42.7	42.6	42.4	42.3	42.2	42.1	41.8	41.4	41.2	41.0	40.9	40.9	40.9	40.6
30	42.0	41.9	41.8	41.6	41.4	41.2	40.9	40.6	40.4	40.2	40.0	39.9	39.6	39.2	38.9	38.7	38.6	38.7	38.4
35	39.7	39.7	39.6	39.5	39.4	39.3	39.2	38.8	38.4	38.0	37.7	37.4	37.3	36.9	36.5	36.2	36.1	36.1	35.8
40	37.4	37.3	37.2	37.1	36.9	36.7	36.5	36.3	36.2	35.8	35.3	34.8	34.5	34.3	33.9	33.5	33.3	33.3	32.9
45	35.1	35.0	34.8	34.6	34.4	34.1	33.8	33.5	33.2	33.0	32.8	32.2	31.7	31.3	31.1	30.6	30.3	30.3	29.9
50	32.0	31.9	31.8	31.7	31.5	31.4	31.1	30.7	30.3	29.9	29.5	29.3	28.7	28.2	27.8	27.4	27.0	27.0	26.6
55	28.9	28.8	28.7	28.5	28.3	28.1	27.8	27.6	27.3	26.8	26.3	25.9	25.6	25.0	24.4	24.1	23.6	23.5	23.2
60	25.8	25.7	25.5	25.3	25.1	24.8	24.5	24.1	23.8	23.5	23.1	22.5	22.0	21.7	21.0	20.6	20.1	20.0	19.7
65	22.3	22.2	22.1	21.9	21.7	21.5	21.2	20.8	20.3	19.9	19.5	19.1	18.6	18.0	17.6	17.0	16.5	16.3	16.1
70	18.7	18.7	18.5	18.4	18.2	17.9	17.6	17.2	16.9	16.5	16.0	15.5	15.0	14.5	13.9	13.4	13.0	12.6	12.5
75	15.2	15.2	15.0	14.9	14.6	14.4	14.0	13.7	13.3	12.9	12.4	12.0	11.5	10.9	10.5	9.91	9.39	9.06	8.93
80	0.11	0.45	1.01	1.79	2.76	3.91	5.22	6.67	8.24	9.43	8.99	8.54	8.07	7.61	7.09	6.62	6.06	5.69	5.57
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.94	3.99	4.00	3.55	3.05	0.55	2.61
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: LOW  
Temperature:25.3DEG  
Operators:G  
Test Date:2022-05-30

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
Humidity:65.0%  
Test Distance:8.750m [K=1.0000]  
Remarks:

**LUMINOUS DISTRIBUTION INTENSITY DATA**

Test:U:11.96V I:0.3410A P:2.722W PF:0.6675 Lamp Flux:1000x1 lm		
NAME: 489925-3000K	TYPE:489925-3000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table--3

UNIT: cd

C (DEG) γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3	46.3
5	46.0	45.9	45.8	45.8	45.7	45.7	45.7	45.6	45.6	45.6	45.5	45.5	45.5	45.5	45.5	45.5	45.5	45.5	45.5
10	45.1	45.0	45.0	44.9	44.8	44.7	44.7	44.7	44.7	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.6	44.7	44.7
15	43.9	43.8	43.7	43.6	43.6	43.5	43.5	43.5	43.6	43.6	43.6	43.7	43.7	43.7	43.7	43.8	43.8	43.8	43.8
20	42.3	42.2	42.1	42.0	42.0	42.1	42.1	42.2	42.2	42.1	42.0	41.9	41.9	41.9	41.8	41.8	41.8	41.9	41.9
25	40.4	40.3	40.2	40.2	40.3	40.4	40.2	40.1	39.9	39.9	39.9	39.8	39.8	39.8	39.8	39.8	39.9	39.9	39.9
30	38.1	38.0	38.0	38.1	38.1	37.9	37.7	37.7	37.6	37.7	37.7	37.7	37.8	37.8	37.9	37.9	37.9	37.9	37.9
35	35.6	35.5	35.6	35.6	35.3	35.2	35.2	35.2	35.3	35.4	35.3	35.2	35.1	35.0	35.0	35.0	35.0	35.0	35.1
40	32.8	32.8	32.9	32.6	32.5	32.4	32.5	32.5	32.4	32.3	32.2	32.1	32.1	32.1	32.1	32.1	32.1	32.1	32.1
45	29.8	29.9	29.6	29.5	29.5	29.6	29.4	29.2	29.2	29.1	29.1	29.1	29.2	29.2	29.2	29.2	29.2	29.2	29.2
50	26.6	26.5	26.3	26.3	26.4	26.1	26.0	26.0	26.0	26.0	26.0	25.9	25.8	25.8	25.7	25.7	25.7	25.7	25.8
55	23.2	23.0	22.9	23.0	22.7	22.7	22.7	22.7	22.6	22.4	22.4	22.3	22.3	22.2	22.2	22.2	22.2	22.2	22.2
60	19.7	19.4	19.5	19.3	19.2	19.3	19.1	19.0	18.9	18.8	18.8	18.8	18.7	18.7	18.7	18.7	18.7	18.7	18.7
65	15.9	15.9	15.8	15.7	15.7	15.5	15.4	15.4	15.3	15.3	15.3	15.2	15.2	15.1	15.1	15.1	15.1	15.1	15.1
70	12.3	12.2	12.2	12.1	12.0	11.9	11.9	11.8	11.8	11.7	11.7	11.6	11.6	11.5	11.5	11.4	11.4	11.4	11.5
75	8.82	8.80	8.69	8.62	8.56	8.50	8.44	8.37	8.29	8.21	8.13	8.05	7.97	7.91	7.86	7.83	7.81	7.82	7.83
80	5.56	5.47	5.42	5.37	5.30	5.22	5.11	4.38	3.52	2.73	2.03	1.43	0.92	0.52	0.23	0.06	0.00	0.06	0.23
85	2.56	2.52	2.24	1.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: LOW  
Temperature:25.3DEG  
Operators:G  
Test Date:2022-05-30

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.291  
Humidity:65.0%  
Test Distance:8.750m [K=1.0000]  
Remarks:

