
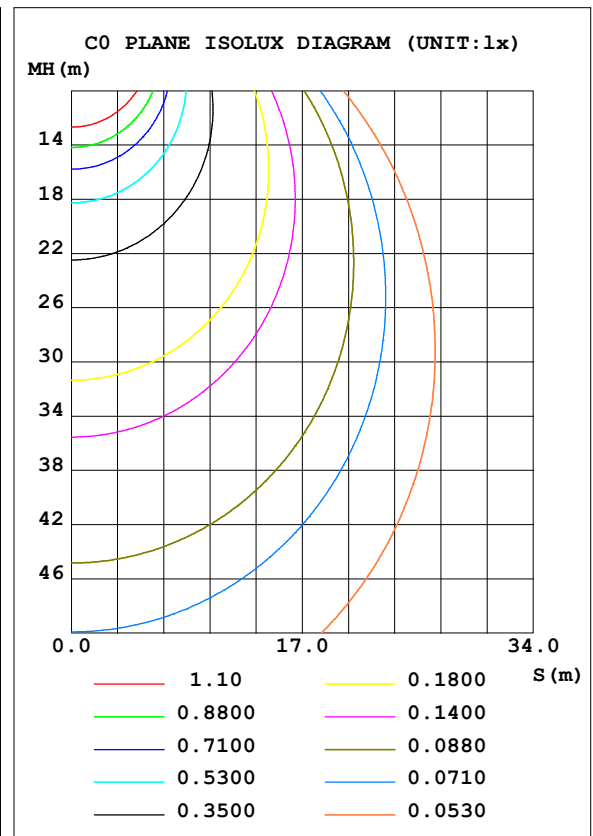


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: SD28AL3-7W-120D	TYPE: SPOT LIGHT	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: wanjia Lighting	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 66.95 lm/W
MODEL	SS3535-2700K-120D	I _{max} (cd)	176.8	S/MH (C0/180)	1.20	
NOMINAL POWER (W)	7	LOR (%)	100.0	S/MH (C90/270)	1.21	
RATED VOLTAGE (V)	12	TOTAL FLUX (lm)	460.28	η UP, DN (C0-180)	0.0, 51.0	
NOMINAL FLUX (lm)	460.275	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	12.2	η down (%)	100.0	CIBSE SHR MAX	1.35	

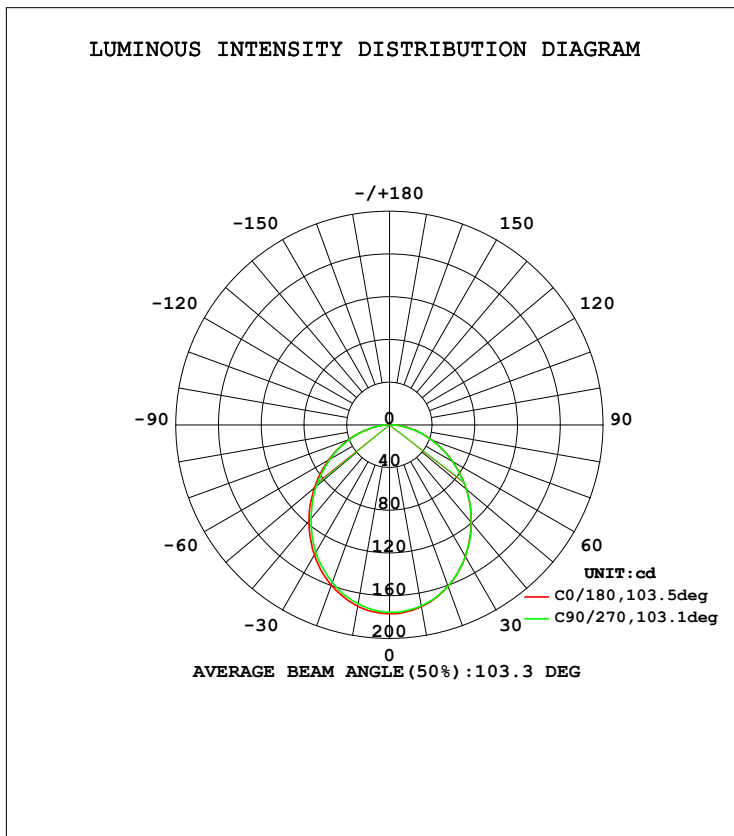

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-02-9

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity: 65.0%
 Test Distance: 7.415m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM


ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	172.7	173.4	172.0	170.7	172.2	169.6	170.1	170.8	0- 10	16.57	16.57	3.6,3.6
20	160.6	162.7	160.5	158.2	159.7	155.7	157.0	158.5	10- 20	46.83	63.40	13.8,13.8
30	142.1	145.3	142.2	139.6	140.7	136.0	138.1	140.0	20- 30	69.26	132.7	28.8,28.8
40	119.1	122.9	119.2	116.5	117.5	112.5	114.6	117.2	30- 40	80.85	213.5	46.4,46.4
50	93.92	98.00	93.92	90.93	91.94	86.99	89.61	92.31	40- 50	80.96	294.5	64,64
60	68.07	71.80	67.75	64.73	65.99	61.71	64.42	67.10	50- 60	70.93	365.4	79.4,79.4
70	42.90	46.05	42.20	39.59	40.54	36.99	39.78	42.32	60- 70	53.19	418.6	90.9,90.9
80	20.15	22.37	19.10	16.88	17.59	15.18	17.80	19.88	70- 80	31.27	449.9	97.7,97.7
90	2.974	4.058	2.571	2.246	1.385	1.632	2.078	3.107	80- 90	10.40	460.3	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2023-02-9

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity:65.0%
 Test Distance:7.415m [K=1.0000]
 Remarks:

Planar Illuminance Curve

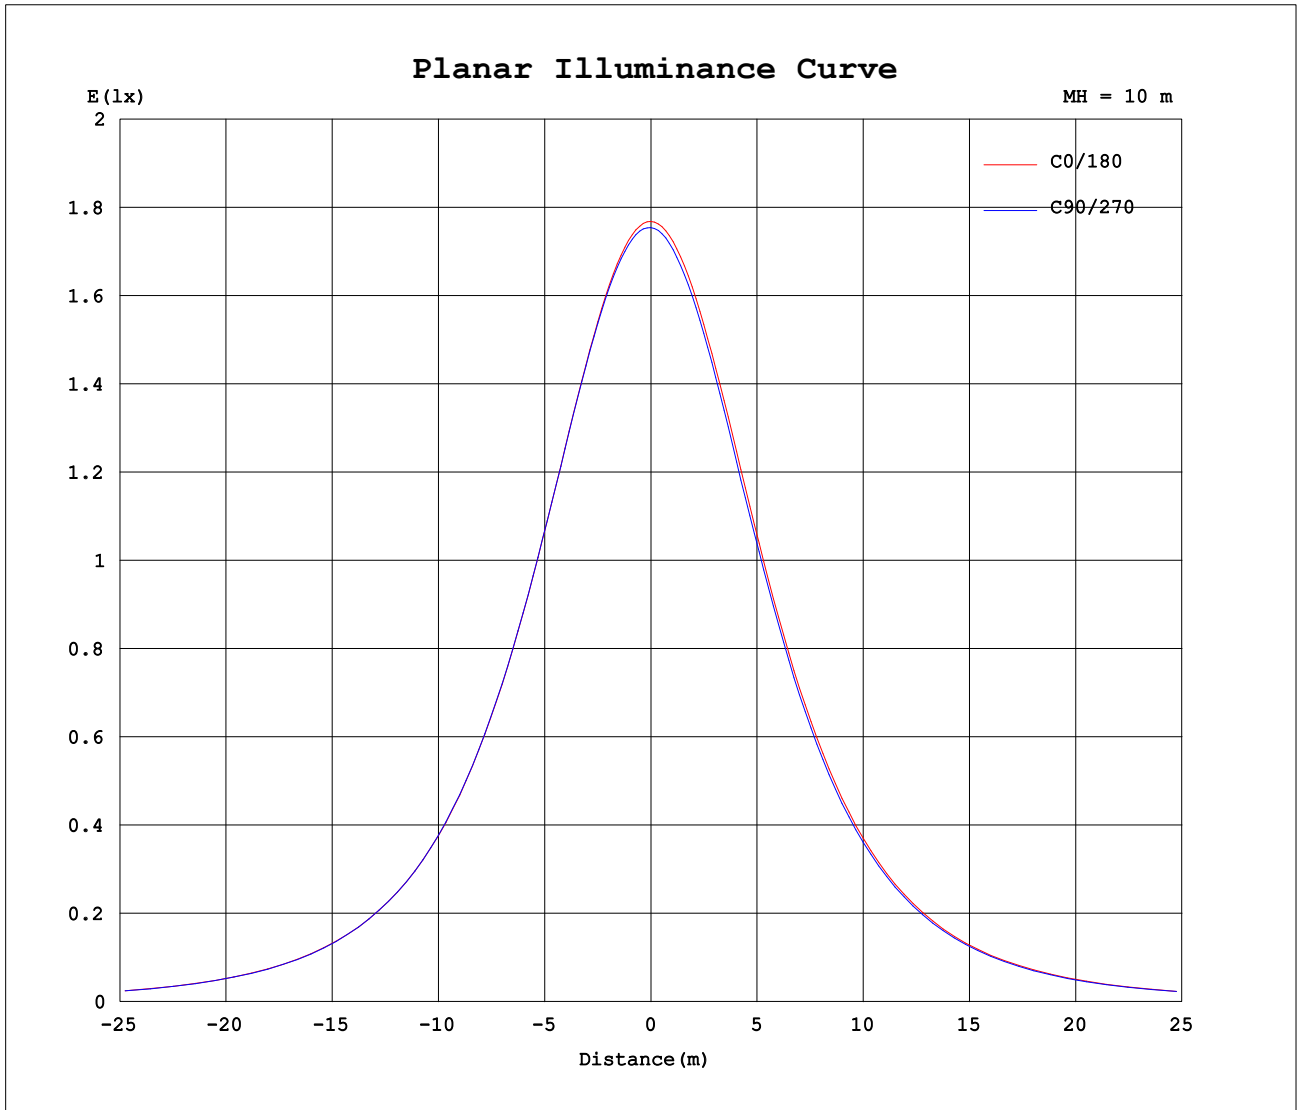


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-02-9

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity: 65.0%
 Test Distance: 7.415m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: SD28AL3-7W-120D	TYPE: SPOT LIGHT	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: wanjia Lighting	SUR.:	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization (CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.75	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.65	.75	.69	.64	.73	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.70	.61	.55	.67	.60	.54	.65	.59	.54	.63	.57	.53	.51
5.0	.63	.55	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.41	.39
7.0	.52	.43	.37	.51	.43	.37	.50	.42	.37	.48	.41	.36	.47	.41	.36	.34
8.0	.48	.39	.33	.47	.39	.33	.45	.38	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.29	.28
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.27	.25

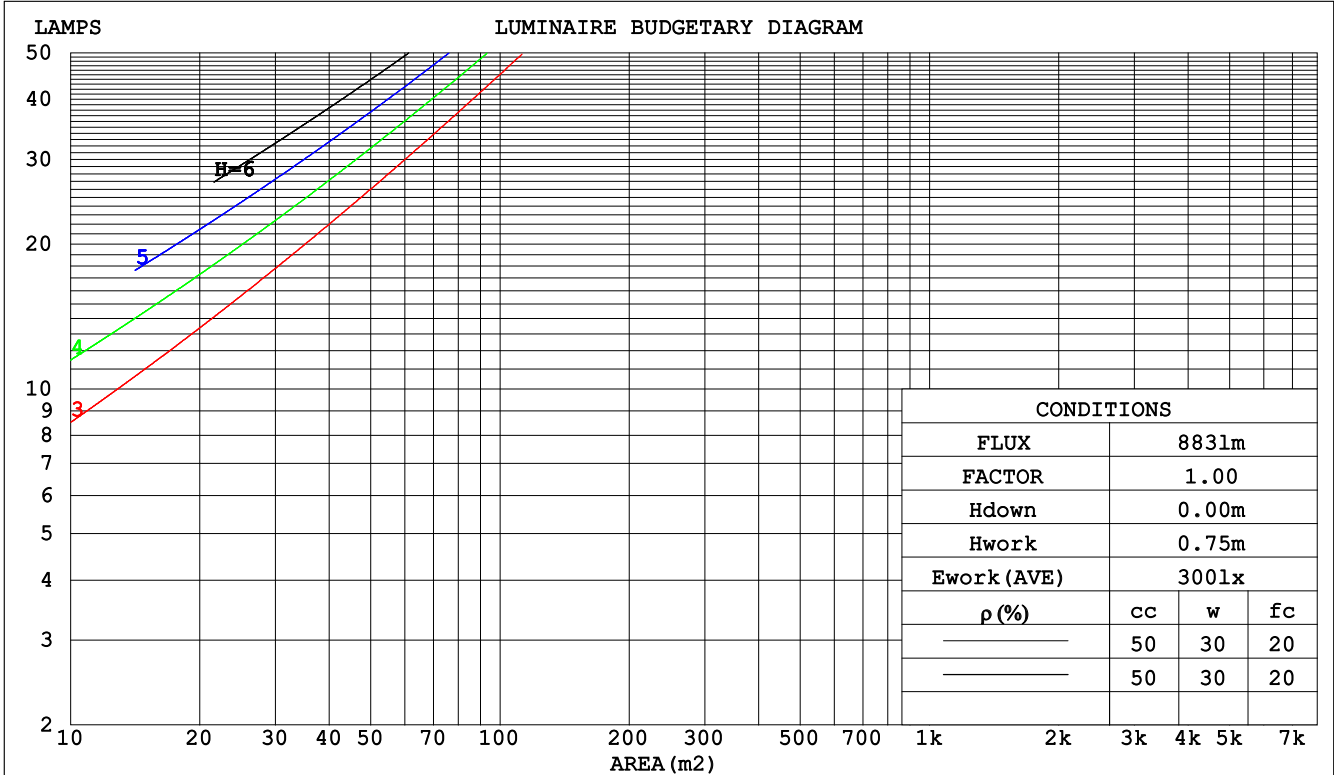

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-02-9

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity: 65.0%
 Test Distance: 7.415m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: SD28AL3-7W-120D	TYPE: SPOT LIGHT	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: wanjia Lighting	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.309	.176	.056	.302	.172	.055	.288	.166	.053	.276	.159	.051	.265	.154	.050	
2.0	.289	.158	.049	.283	.156	.048	.271	.151	.047	.260	.146	.046	.250	.142	.045	
3.0	.267	.142	.043	.261	.140	.042	.251	.136	.041	.241	.132	.041	.233	.129	.040	
4.0	.246	.128	.038	.241	.126	.037	.232	.123	.037	.224	.120	.036	.216	.117	.036	
5.0	.228	.116	.034	.223	.115	.033	.215	.112	.033	.208	.110	.033	.201	.107	.032	
6.0	.211	.106	.030	.207	.105	.030	.200	.103	.030	.193	.100	.030	.187	.098	.029	
7.0	.197	.097	.028	.193	.096	.027	.187	.094	.027	.181	.093	.027	.175	.091	.027	
8.0	.184	.090	.025	.181	.089	.025	.175	.087	.025	.169	.086	.025	.164	.084	.025	
9.0	.172	.083	.023	.170	.083	.023	.164	.081	.023	.159	.080	.023	.155	.079	.023	
10.0	.162	.078	.022	.160	.077	.022	.155	.076	.021	.151	.075	.021	.146	.074	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.134	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.075	.140	.099	.065	.096	.068	.045	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.090	.048	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.141	.082	.040	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.034	.116	.065	.029	.080	.046	.021	.046	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.110	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.042	.023	.009	.014	.008	.003	
10.0	.116	.060	.023	.100	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-02-9

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity: 65.0%
 Test Distance: 7.415m [K=1.0000]
 Remarks:

Uncorrected UGR Table

NAME: SD28AL3-7W-120D					TYPE: SPOT LIGHT					WEIGHT:				
DIM.:					SPEC.:					SERIAL No.:				
MFR.: wanjia Lighting					SUR.:					PROTECTION ANGLE:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions	Viewed crosswise					Viewed endwise								
x = 2H y = 2H	30.1	31.6	30.4	31.8	32.1	30.1	31.6	30.4	31.8	32.0				
3H	31.6	33.0	31.9	33.3	33.5	31.6	33.0	31.9	33.2	33.5				
4H	32.3	33.6	32.6	33.8	34.1	32.2	33.5	32.5	33.8	34.0				
6H	32.8	34.0	33.1	34.3	34.6	32.7	33.9	33.0	34.2	34.5				
8H	33.0	34.2	33.3	34.5	34.7	32.9	34.1	33.2	34.3	34.6				
12H	33.1	34.3	33.5	34.6	34.9	33.0	34.1	33.3	34.4	34.7				
4H 2H	30.8	32.1	31.1	32.4	32.6	30.8	32.1	31.1	32.4	32.6				
3H	32.5	33.7	32.8	33.9	34.3	32.5	33.6	32.8	33.9	34.2				
4H	33.3	34.3	33.6	34.6	35.0	33.2	34.3	33.6	34.6	34.9				
6H	33.9	34.9	34.3	35.2	35.6	33.8	34.8	34.2	35.1	35.5				
8H	34.2	35.0	34.6	35.4	35.8	34.1	34.9	34.5	35.3	35.7				
12H	34.4	35.2	34.8	35.6	36.0	34.2	35.0	34.7	35.4	35.8				
8H 4H	33.6	34.5	34.0	34.8	35.2	33.5	34.4	34.0	34.8	35.2				
6H	34.4	35.2	34.9	35.6	36.0	34.3	35.1	34.8	35.5	35.9				
8H	34.8	35.4	35.3	35.9	36.3	34.7	35.3	35.1	35.8	36.2				
12H	35.1	35.7	35.6	36.1	36.6	35.0	35.5	35.4	36.0	36.4				
12H 4H	33.6	34.4	34.0	34.8	35.2	33.6	34.4	34.0	34.8	35.2				
6H	34.5	35.2	35.0	35.6	36.0	34.4	35.1	34.9	35.5	36.0				
8H	34.9	35.5	35.4	36.0	36.4	34.8	35.4	35.3	35.8	36.3				
Variations with the observer position at spacings:														
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2								
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3								
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3								

CIE Pub.117 Corrected 460.3 lm Total Lamp Luminous Flux. (8log(F/F0) = -2.7)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-02-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.274
Humidity: 65.0%
Test Distance: 7.415m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: SD28AL3-7W-120D	TYPE: SPOT LIGHT	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: wanjia Lighting	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	57	50	68	57	50	66	56	49	42
1.00	77	66	59	76	65	58	73	67	58	51
1.25	84	73	66	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	76	70	63
2.00	95	87	81	94	86	80	90	83	78	70
2.50	99	91	85	97	90	85	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-02-9

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity: 65.0%
 Test Distance: 7.415m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: SD28AL3-7W-120D	TYPE: SPOT LIGHT	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: wanjia Lighting	SUR.:	PROTECTION ANGLE:

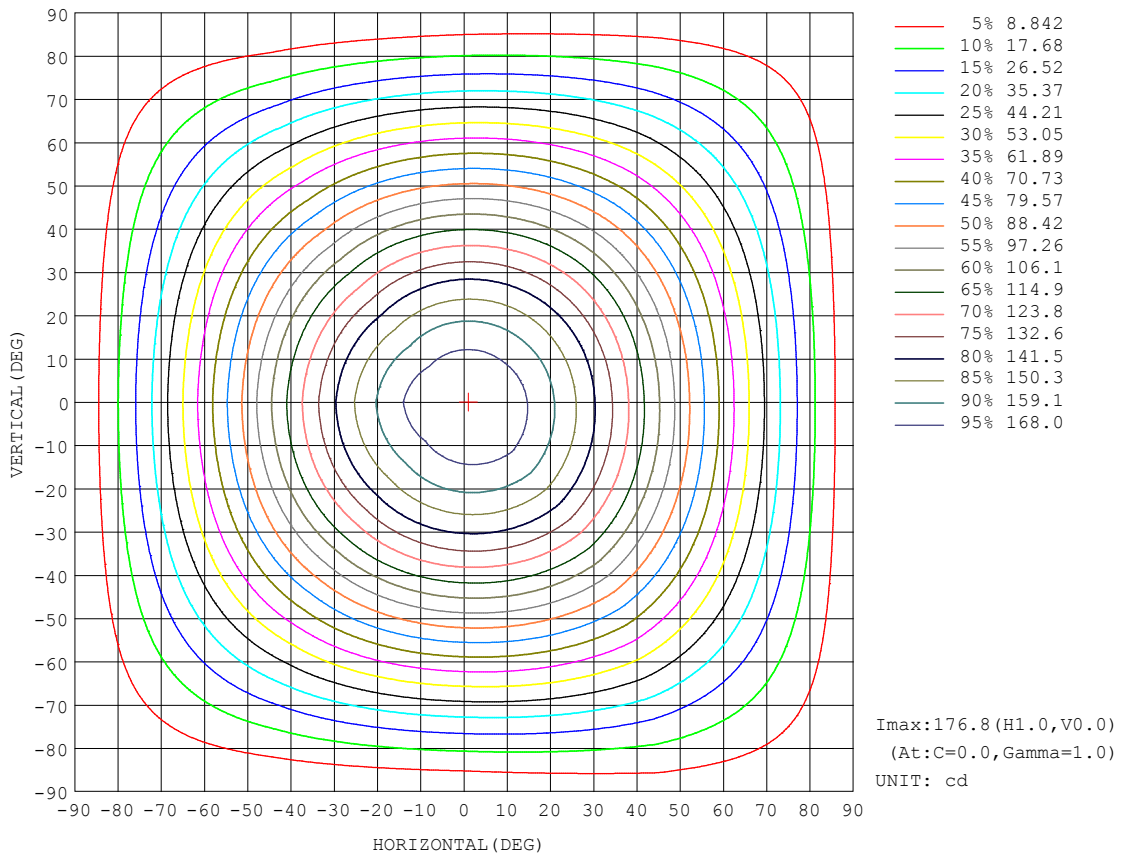


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-02-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.274
Humidity: 65.0%
Test Distance: 7.415m [K=1.0000]
Remarks:

AAI Figure

NAME: SD28AL3-7W-120D	TYPE: SPOT LIGHT	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: wanjia Lighting	SUR.:	PROTECTION ANGLE:

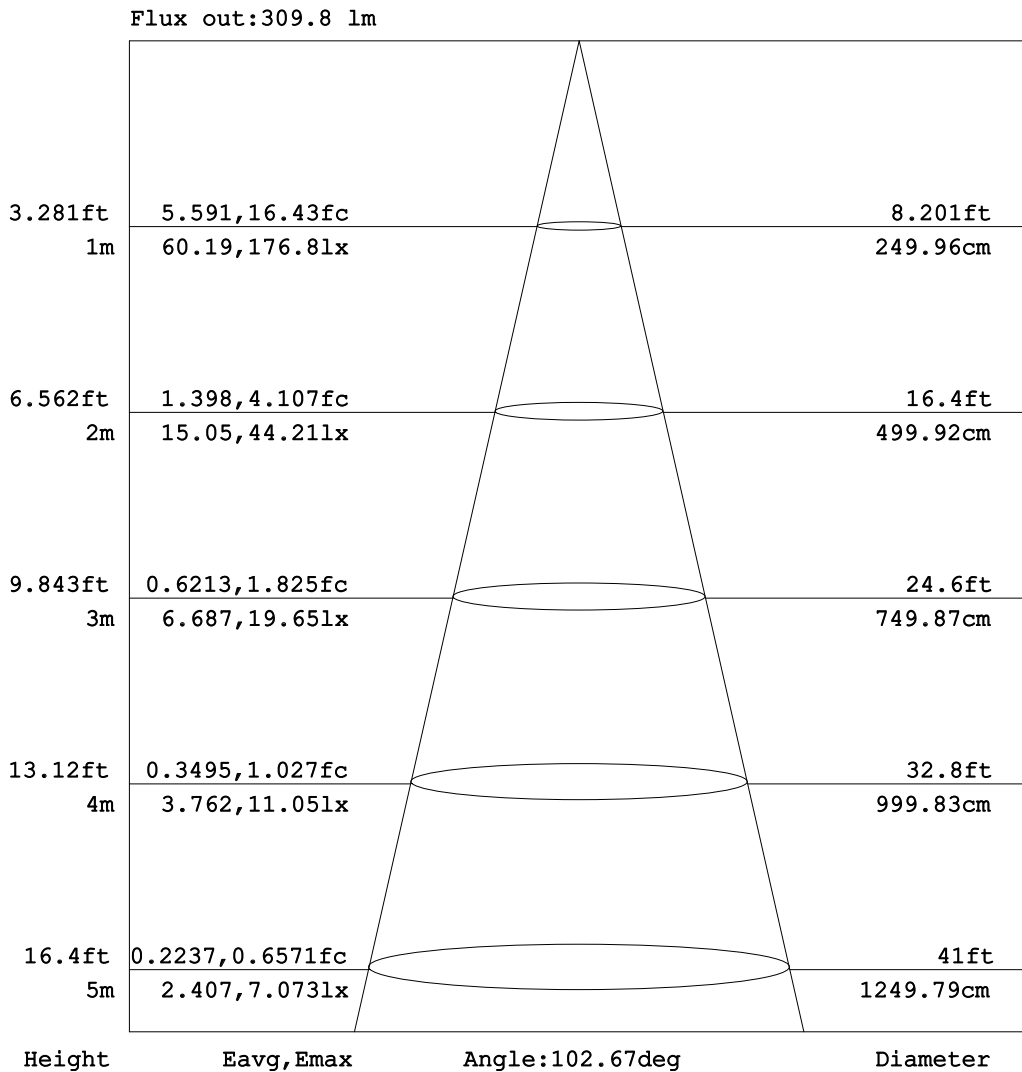


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2023-02-9

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.274
Humidity: 65.0%
Test Distance: 7.415m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: SD28AL3-7W-120D	TYPE: SPOT LIGHT	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: wanjia Lighting	SUR.:	PROTECTION ANGLE:

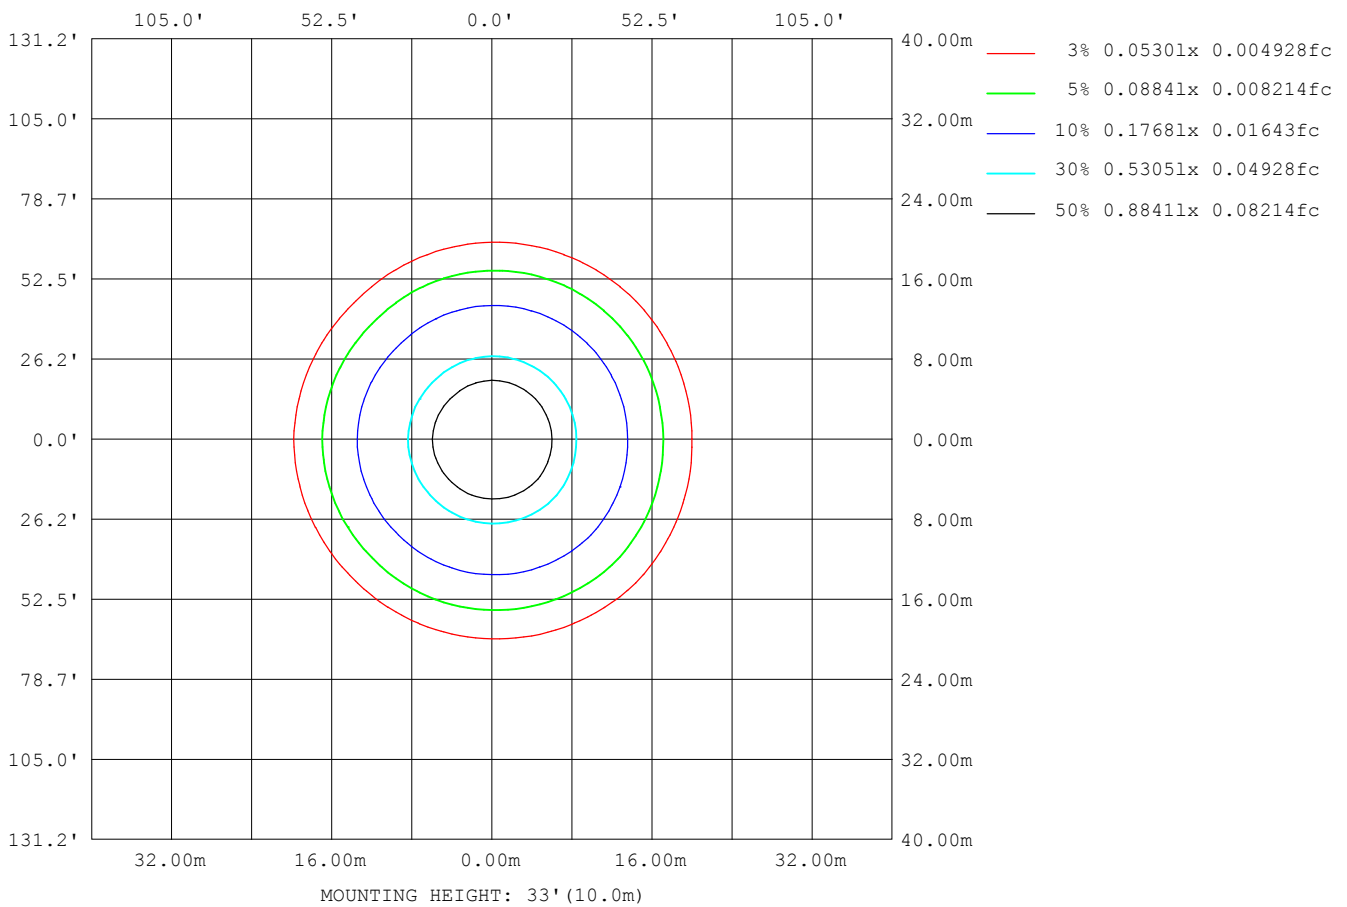

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-02-9

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity: 65.0%
 Test Distance: 7.415m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: SD28AL3-7W-120D	TYPE: SPOT LIGHT	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:
MFR.: wanjia Lighting	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

γ (DEG)	C (DEG)																			
	0	45	90	135	180	225	270	315												
0	177	176	175	175	177	176	175	175												
5	176	176	175	174	176	174	174	174												
10	173	173	172	171	172	170	170	171												
15	168	169	167	165	167	164	165	166												
20	161	163	160	158	160	156	157	158												
25	152	155	152	149	151	146	148	150												
30	142	145	142	140	141	136	138	140												
35	131	135	131	128	129	124	127	129												
40	119	123	119	116	117	112	115	117												
45	107	111	107	104	105	100	102	105												
50	93.9	98.0	93.9	90.9	91.9	87.0	89.6	92.3												
55	81.0	85.0	80.9	77.8	78.9	74.2	76.9	79.8												
60	68.1	71.8	67.7	64.7	66.0	61.7	64.4	67.1												
65	55.3	58.8	54.7	52.0	53.0	49.1	51.9	54.5												
70	42.9	46.1	42.2	39.6	40.5	37.0	39.8	42.3												
75	31.1	33.7	30.1	27.7	28.7	25.6	28.3	30.7												
80	20.2	22.4	19.1	16.9	17.6	15.2	17.8	19.9												
85	10.4	12.3	9.23	7.66	7.86	6.14	8.75	10.4												
90	2.97	4.06	2.57	2.25	1.39	1.63	2.08	3.11												

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2023-02-9

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.274
 Humidity: 65.0%
 Test Distance: 7.415m [K=1.0000]
 Remarks: