Dauer MANUFACTURING®

SPECIFICATION SHEET

Type:

Model:

DRAKE BRASS INTEGRATED Path Light



SPECIFICATIONS

HOUSING:
Cast brass. Adjustable shrouds with tension screws.

FINISH:
Weathered brass. Custom powder coated colors available.

INTEGRATED LED:
3.5W per head, 7W total. 2700K or 3000K color temperatures.

LENS:
Clear tempered glass.


MOUNTING:
Stem threaded with 1/2” NPT. Heavy-duty composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories.


WIRING:
Pre-wired with 5' pigtail of 18/2 cable.

WARRANTY:
10 years.

ETL LISTED c US Intertek

DIMENSIONS:

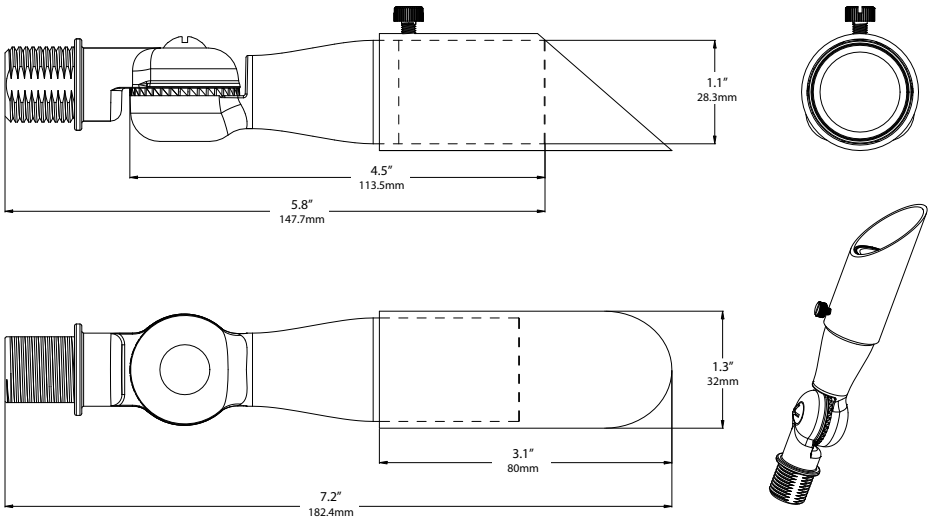


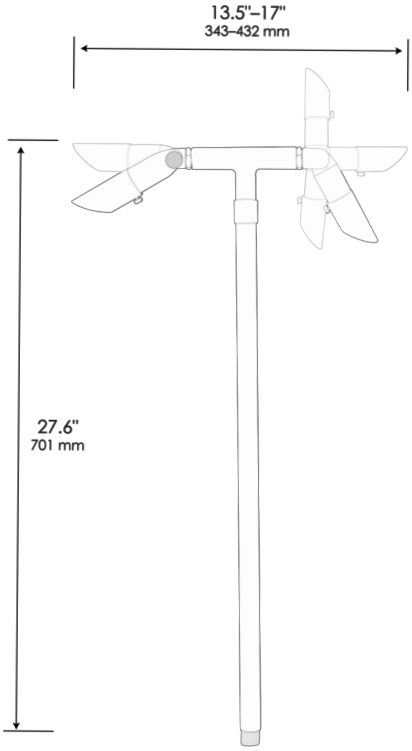

HQ: 10505 NW 112 Ave, Suite 18 | Miami, FL 33178 | Plant: 1430 Gould Blvd., Suite 3 | La Vergne, TN 37086 | **888.DAUER.LED** DauerManufacturing.com

Dauer MANUFACTURING®

SPECIFICATION SHEET Page 2
DRAKE BRASS INTEGRATED Path Light

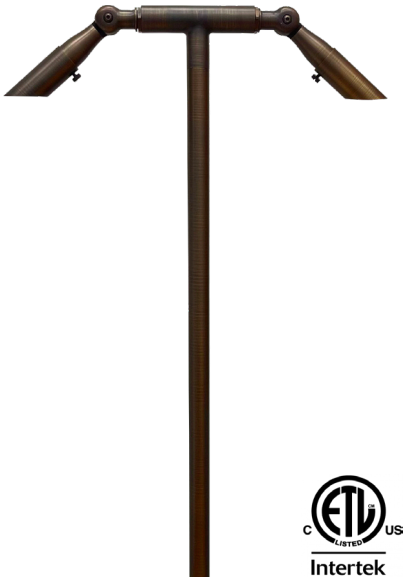

LED LAMP SPECIFICATIONS

LAMP TYPE:
Integrated LED.

OPTICS:
Integral optics providing available beam spreads of 25°, 40°, 60° and 100°.

COLOR TEMPERATURES:
Color temperature options provide the following qualities: 2700K and 3000K.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

489919-24-2725-7W-25°-2700K-M3

FIXTURE	LAMP							MOUNTING
	WATTAGE	VOLT AMPS	BEAM SPREAD	COLOR TEMP.	LUMENS	EFFICACY	CRI	**MS** Composite stake (incl.) 490034
489919-24-2725	3.5W (per head), 7W total	4.52 (per head)	25°	2700K	339 lm/head	194 lm/W	80+	**M3** Trident Heavy-Duty 3-Prong Stake 490036
489919-24-2740		4.52 (per head)	40°	2700K	316 lm/head	180 lm/W	80+	**PM** Round pier mount 490057
489919-24-2760		4.52 (per head)	60°	2700K	323 lm/head	184 lm/W	80+	**MR** Round tapered 3-hole surface mount 490048
489919-24-27100		4.52 (per head)	100°	2700K	275 lm/head	156 lm/W	80+	**MP** PVC/Brass post stake 490037
489919-24-3025		4.49 (per head)	25°	3000K	343 lm/head	196 lm/W	80+	
489919-24-3040		4.49 (per head)	40°	3000K	343 lm/head	196 lm/W	80+	
489919-24-3060		4.49 (per head)	60°	3000K	351 lm/head	200 lm/W	80+	
489919-24-30100		4.49 (per head)	100°	3000K	296 lm/head	168 lm/W	80+	