
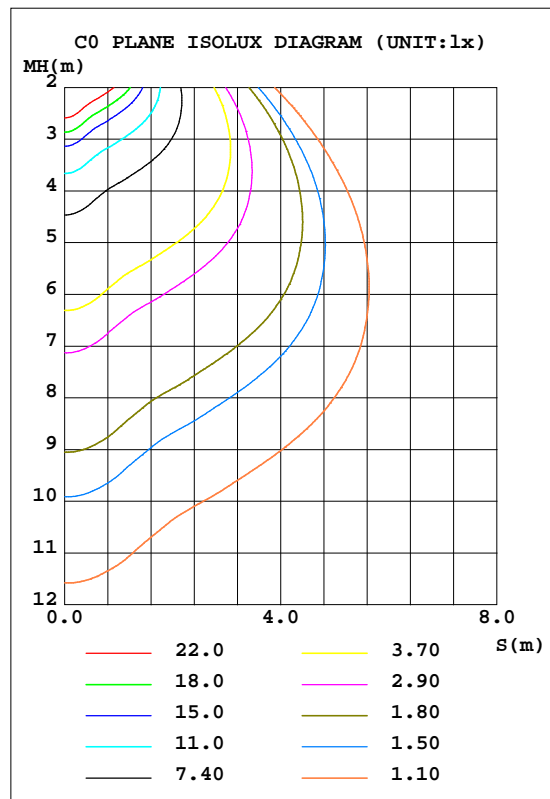


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:11.894V I:0.4099A P:3.5164W PF:0.7212 Freq:60.00Hz Lamp Flux:347.106x1 lm		
NAME: 486742-MR16-3W-3000K-120°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax(cd)	146.8	S/MH(C0/180)	1.15
NOMINAL POWER(W)	--	LOR(%)	100.0	S/MH(C90/270)	1.15
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	347.11	η UP,DN(C0-180)	0.0,51.0
NOMINAL FLUX(lm)	347.106	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	--	η down(%)	100.0	CIBSE SHR MAX	1.35

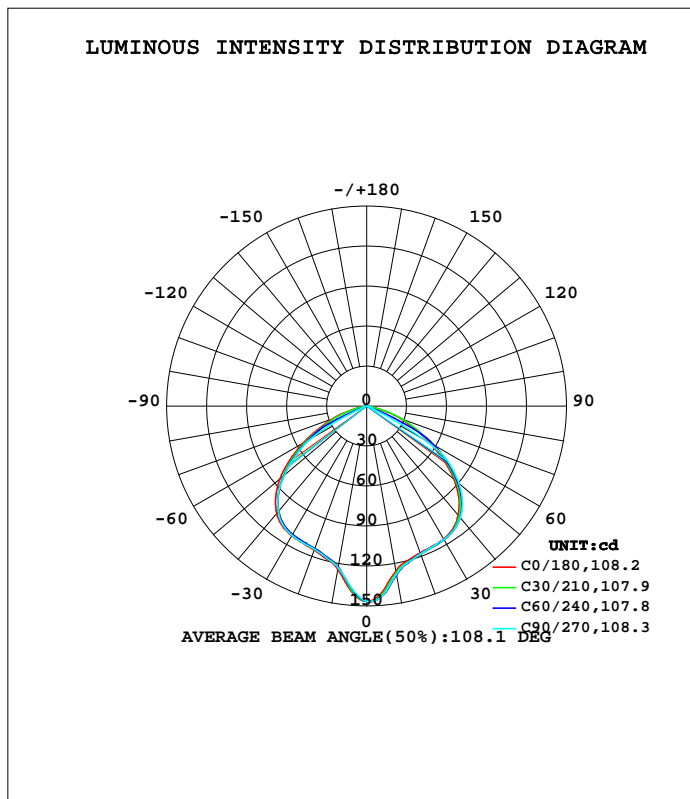

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	125.8	128.5	128.3	126.7	124.6	122.3	123.1	124.6	0- 10	12.82	12.82	3.69,3.69
20	117.3	118.3	118.1	116.2	115.1	113.7	114.4	116.1	10- 20	33.81	46.63	13.4,13.4
30	115.3	116.2	115.7	113.3	112.4	110.9	112.0	113.7	20- 30	53.11	99.74	28.7,28.7
40	106.8	108.8	109.3	106.5	105.1	102.1	103.3	105.0	30- 40	69.50	169.2	48.8,48.8
50	85.69	88.81	90.51	87.44	84.92	80.85	80.78	83.68	40- 50	74.65	243.9	70.3,70.3
60	54.24	58.21	48.52	57.91	54.49	50.09	46.28	52.52	50- 60	62.73	306.6	88.3,88.3
70	26.42	22.88	4.476	21.83	25.89	20.52	3.767	25.03	60- 70	32.41	339.0	97.7,97.7
80	2.102	1.111	0.4451	1.021	1.817	0.8752	0.1462	1.344	70- 80	7.726	346.8	99.9,99.9
90	0.0229	0.0119	0	0.0067	0.0643	0.0520	0.0379	0.0567	80- 90	0.3413	347.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 206.93 lm

%lum = 59.6%
%lamp = 59.6%

Conical surface Flux(120deg): 306.62 lm


%lum = 88.3%
%lamp = 88.3%

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:11.894V I:0.4099A P:3.5164W PF:0.7212 Freq:60.00Hz Lamp Flux:347.106x1 lm		
NAME: 486742-MR16-3W-3000K-120°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

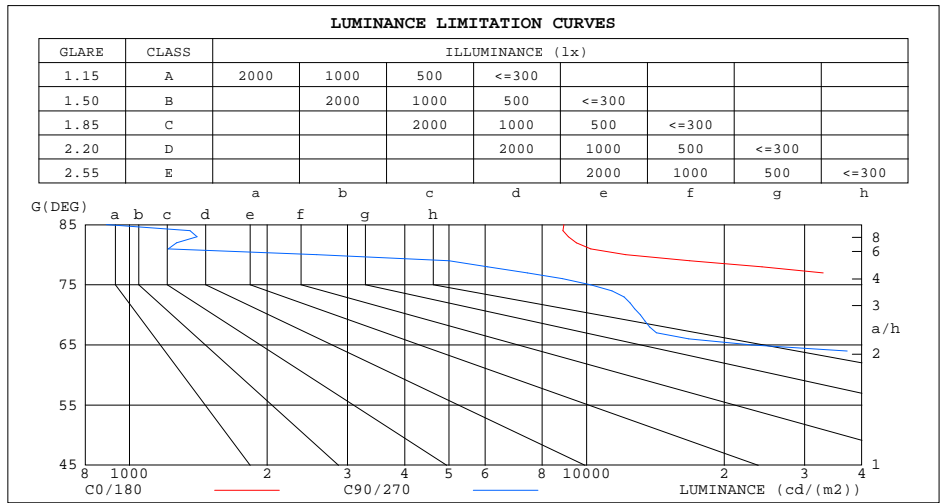

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	8923	891
80	12183	2568
75	50494	10202
70	77736	13107
65	93357	22976
60	109170	97193
55	123618	132742
50	134170	141041
45	139353	144033


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:11.894V I:0.4099A P:3.5164W PF:0.7212 Freq:60.00Hz Lamp Flux:347.106x1 lm		
NAME: 486742-MR16-3W-3000K-120°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.06	1.03	.99	1.04	1.01	.98	.90	.97	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.94	.88	.83	.92	.86	.82	.89	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.83	.76	.70	.82	.75	.69	.79	.73	.68	.76	.71	.67	.73	.69	.65	.63
4.0	.74	.66	.59	.73	.65	.59	.70	.63	.58	.68	.62	.57	.66	.61	.57	.55
5.0	.66	.57	.51	.65	.57	.51	.63	.56	.50	.61	.55	.50	.59	.54	.49	.47
6.0	.59	.51	.45	.58	.50	.44	.57	.49	.44	.55	.49	.44	.54	.48	.43	.41
7.0	.54	.45	.39	.53	.45	.39	.52	.44	.39	.50	.44	.39	.49	.43	.38	.36
8.0	.49	.41	.35	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.34	.32
9.0	.45	.37	.31	.44	.37	.31	.43	.36	.31	.42	.36	.31	.41	.35	.31	.29
10.0	.41	.34	.28	.41	.33	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26

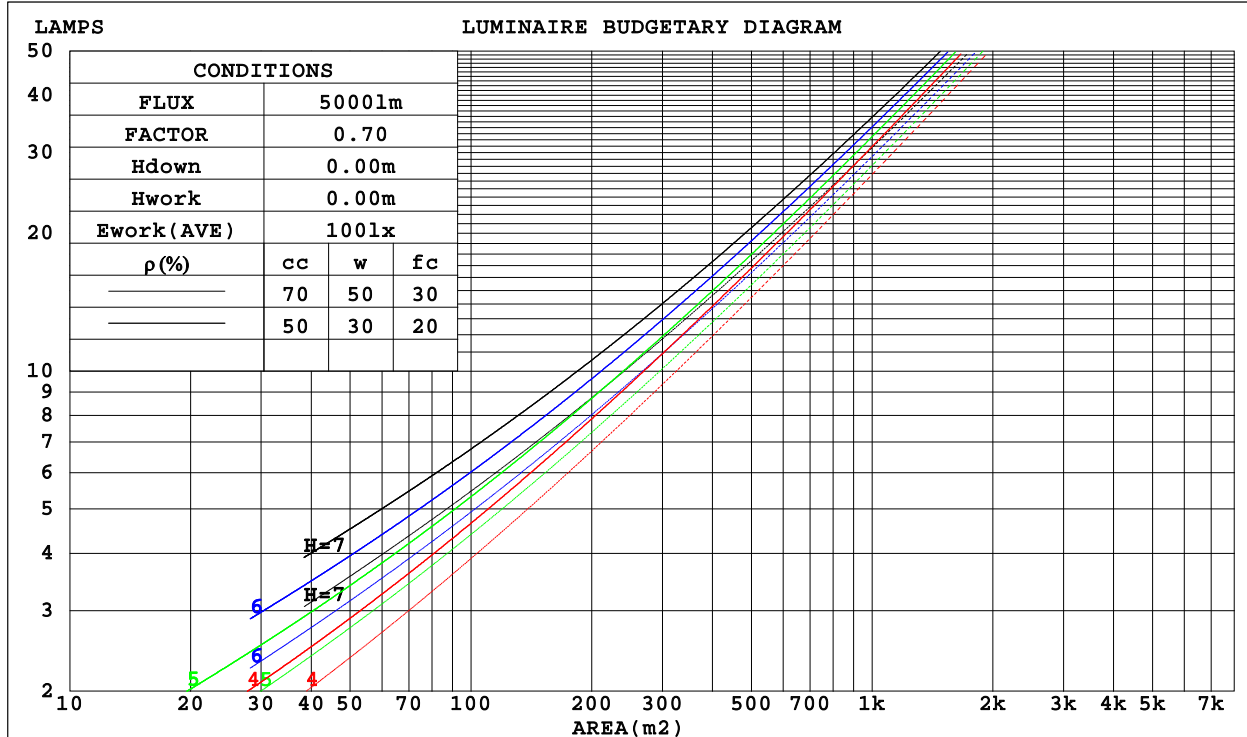

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:11.894V I:0.4099A P:3.5164W PF:0.7212 Freq:60.00Hz Lamp Flux:347.106x1 lm		
NAME: 486742-MR16-3W-3000K-120°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.263	.149	.047	.256	.146	.046	.243	.139	.044	.231	.133	.043	.220	.127	.041	
2.0	.259	.142	.043	.252	.139	.043	.241	.134	.042	.231	.129	.040	.221	.125	.039	
3.0	.246	.131	.039	.241	.129	.039	.231	.125	.038	.222	.121	.037	.213	.118	.036	
4.0	.232	.121	.035	.227	.119	.035	.218	.116	.035	.210	.113	.034	.202	.110	.033	
5.0	.218	.111	.032	.213	.110	.032	.206	.107	.032	.198	.105	.031	.191	.102	.031	
6.0	.204	.102	.029	.200	.101	.029	.193	.099	.029	.187	.097	.029	.180	.095	.028	
7.0	.192	.095	.027	.188	.094	.027	.182	.092	.026	.176	.090	.026	.170	.088	.026	
8.0	.180	.088	.025	.177	.087	.025	.171	.086	.024	.166	.084	.024	.161	.083	.024	
9.0	.170	.082	.023	.167	.081	.023	.162	.080	.023	.157	.079	.023	.152	.077	.022	
10.0	.160	.077	.021	.158	.076	.021	.153	.075	.021	.149	.074	.021	.144	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.177	.157	.138	.151	.134	.119	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.168	.132	.102	.144	.114	.088	.099	.079	.062	.057	.046	.036	.018	.015	.012	
3.0	.160	.114	.078	.137	.098	.067	.094	.068	.047	.054	.040	.028	.017	.013	.009	
4.0	.153	.101	.061	.131	.087	.053	.090	.061	.037	.052	.035	.022	.017	.012	.007	
5.0	.146	.090	.049	.125	.078	.043	.086	.054	.030	.050	.032	.018	.016	.010	.006	
6.0	.139	.082	.041	.119	.071	.035	.082	.050	.025	.048	.029	.015	.015	.010	.005	
7.0	.133	.075	.034	.114	.065	.030	.079	.045	.021	.046	.027	.013	.015	.009	.004	
8.0	.127	.069	.029	.109	.060	.026	.075	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.121	.064	.026	.104	.056	.022	.072	.039	.016	.042	.023	.010	.014	.008	.003	
10.0	.115	.060	.023	.100	.052	.020	.069	.037	.014	.040	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:11.894V I:0.4099A P:3.5164W PF:0.7212 Freq:60.00Hz Lamp Flux:347.106x1 lm										
NAME: 486742-MR16-3W-3000K-120°					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:35mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	30.0	31.4	30.3	31.6	31.8	29.8	31.2	30.0	31.4	31.6
3H	30.9	32.2	31.2	32.4	32.7	29.6	31.0	29.9	31.2	31.4
4H	31.1	32.3	31.4	32.6	32.8	29.5	30.8	29.8	31.0	31.3
6H	31.0	32.2	31.4	32.5	32.8	29.4	30.6	29.8	30.9	31.1
8H	31.0	32.1	31.3	32.4	32.7	29.4	30.5	29.7	30.8	31.1
12H	30.9	32.0	31.3	32.3	32.6	29.3	30.4	29.7	30.7	31.0
4H 2H	30.4	31.7	30.7	31.9	32.2	30.2	31.5	30.5	31.7	32.0
3H	31.5	32.5	31.8	32.8	33.1	30.1	31.2	30.4	31.5	31.8
4H	31.7	32.7	32.1	33.0	33.3	30.0	31.0	30.4	31.3	31.6
6H	31.7	32.6	32.1	32.9	33.3	29.9	30.8	30.3	31.1	31.5
8H	31.7	32.4	32.1	32.8	33.2	29.9	30.7	30.3	31.0	31.4
12H	31.6	32.3	32.0	32.7	33.1	29.8	30.6	30.3	30.9	31.3
8H 4H	31.6	32.4	32.0	32.8	33.2	30.0	30.8	30.4	31.2	31.5
6H	31.6	32.3	32.0	32.7	33.1	29.9	30.6	30.4	31.0	31.4
8H	31.6	32.1	32.0	32.6	33.0	29.9	30.5	30.3	30.9	31.3
12H	31.5	32.0	32.0	32.5	32.9	29.8	30.3	30.3	30.8	31.2
12H 4H	31.6	32.3	32.0	32.7	33.1	30.0	30.7	30.4	31.1	31.5
6H	31.6	32.1	32.0	32.6	33.0	29.9	30.5	30.3	30.9	31.3
8H	31.5	32.0	32.0	32.5	32.9	29.8	30.3	30.3	30.8	31.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.5					+ 0.2 / - 0.3				
1.5H	+ 0.3 / - 0.6					+ 1.0 / - 1.8				
2.0H	+ 0.6 / - 0.9					+ 1.0 / - 1.3				

CIE Pub.117, 347.1 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -3.7)
Area: 0.001 m2

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:11.894V I:0.4099A P:3.5164W PF:0.7212 Freq:60.00Hz Lamp Flux:347.106x1 lm		
NAME: 486742-MR16-3W-3000K-120°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	59	48	41	58	47	41	57	47	41	34
0.80	70	59	52	69	58	52	67	58	51	45
1.00	79	69	62	78	68	62	76	69	61	54
1.25	87	77	70	85	76	70	83	75	69	62
1.50	91	83	76	90	82	76	87	80	75	68
2.00	98	91	85	96	90	84	93	87	83	75
2.50	102	95	90	100	93	89	96	91	87	79
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	102	98	102	98	95	87
5.00	110	106	103	108	104	101	104	101	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:11.894V I:0.4099A P:3.5164W PF:0.7212 Freq:60.00Hz Lamp Flux:347.106x1 lm		
NAME: 486742-MR16-3W-3000K-120°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

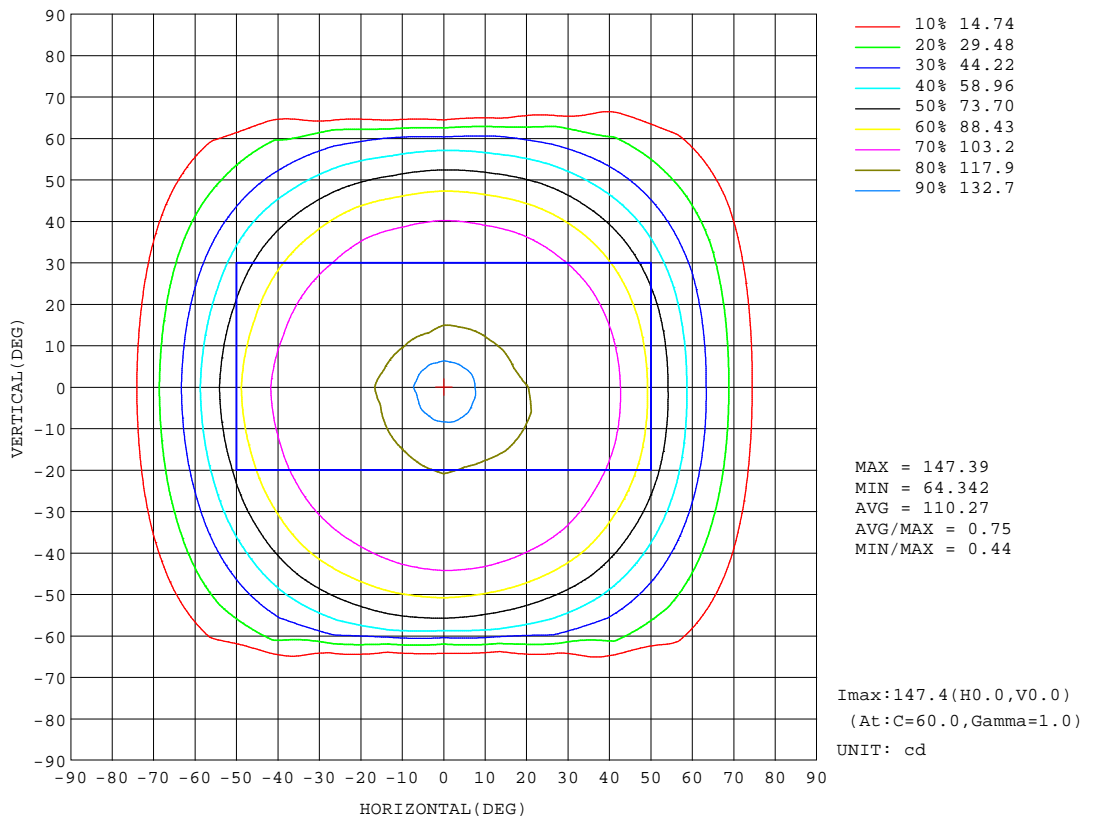


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:11.894V I:0.4099A P:3.5164W PF:0.7212 Freq:60.00Hz Lamp Flux:347.106x1 lm		
NAME: 486742-MR16-3W-3000K-120°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

Flux out:277.8 lm

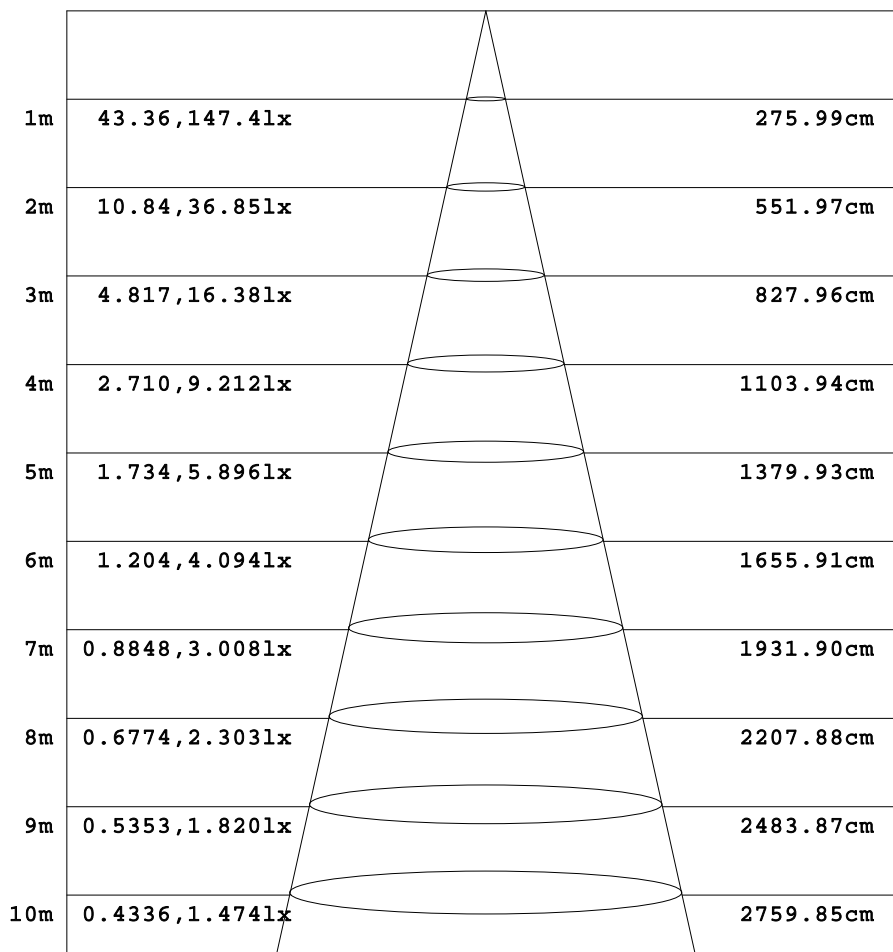

Height Eavg, Emax Angle:108.14deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:11.894V I:0.4099A P:3.5164W PF:0.7212 Freq:60.00Hz Lamp Flux:347.106x1 lm		
NAME: 486742-MR16-3W-3000K-120°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

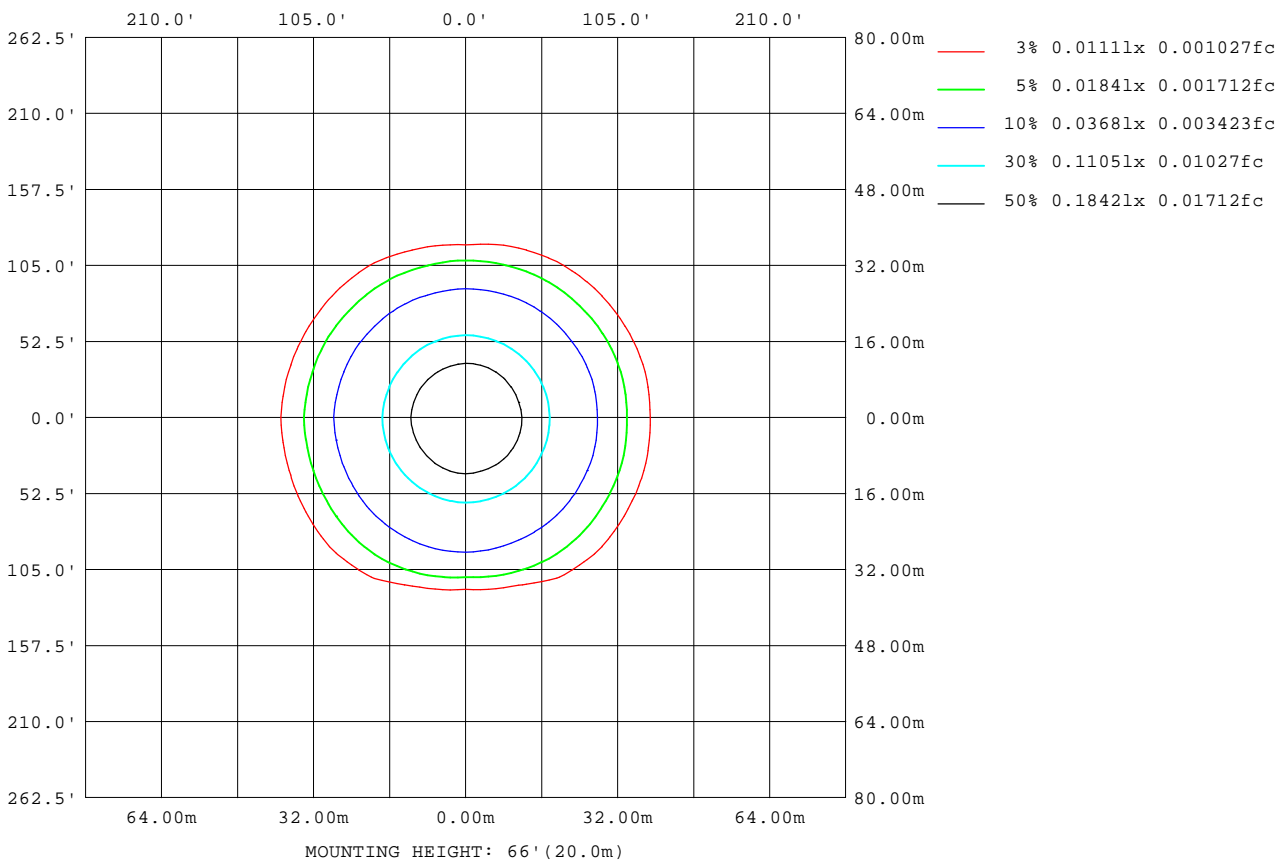

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:11.894V I:0.4099A P:3.5164W PF:0.7212 Freq:60.00Hz Lamp Flux:347.106x1 lm		
NAME: 486742-MR16-3W-3000K-120°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	92200
L_0~180(75)av	47914
L_0~180(85)av	8255
L_90~270(65)av	24683
L_90~270(75)av	9230
L_90~270(85)av	530
L_45(65)av	92626
L_45(75)av	11073
L_45(85)av	828

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

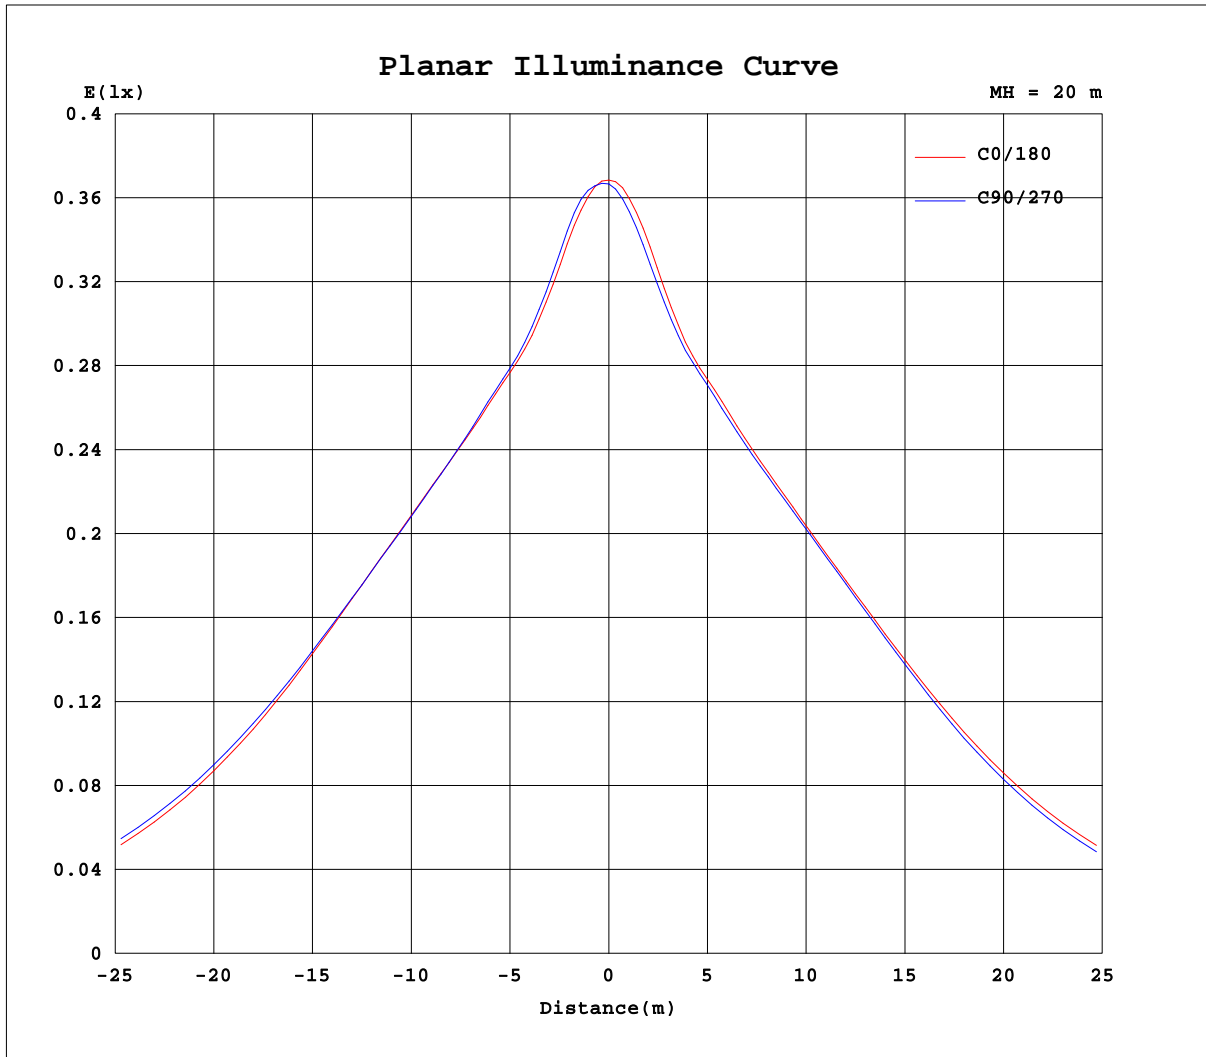

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2022-05-31

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.894V I:0.4099A P:3.5164W PF:0.7212 Freq:60.00Hz Lamp Flux:347.106x1 lm		
NAME: 486742-MR16-3W-3000K-120°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	146	146	146	146	146	146	146	146	146	146	146	146	146	146	146	146	146	146	146
5	140	141	141	142	142	143	143	142	141	141	139	138	139	138	138	137	137	136	136
10	126	127	127	128	129	129	128	128	127	127	125	125	125	123	123	122	123	123	123
15	120	121	121	122	122	122	121	121	121	120	120	119	118	118	117	117	117	117	118
20	117	118	118	118	118	118	118	118	117	116	116	116	115	114	114	114	114	114	114
25	116	117	117	117	117	116	117	116	115	114	114	114	114	113	112	112	112	113	113
30	115	116	116	116	116	116	116	115	114	113	113	113	112	112	111	111	111	111	112
35	113	114	114	114	114	114	114	114	113	111	110	111	110	109	109	108	109	108	109
40	107	108	108	109	109	110	109	108	107	106	106	106	105	103	103	102	103	103	103
45	97.9	99.1	99.2	100	101	102	102	101	99.4	98.3	97.4	97.0	96.7	94.5	93.8	93.1	93.9	93.2	93.8
50	85.7	87.3	87.5	88.8	89.2	89.9	90.5	90.1	88.3	87.4	85.5	85.0	84.9	82.6	81.9	80.9	81.1	80.0	80.8
55	70.4	72.5	72.8	74.3	74.4	75.1	76.0	76.2	74.8	73.5	71.0	70.3	70.4	68.1	67.3	65.9	65.9	64.6	65.3
60	54.2	56.2	56.8	58.2	58.1	54.4	48.5	55.7	58.8	57.9	55.6	54.5	54.5	52.5	51.7	50.1	50.0	48.8	46.3
65	39.2	39.8	41.3	41.6	30.9	12.2	9.69	13.0	30.7	41.7	40.6	38.7	38.7	37.5	35.9	35.8	31.3	15.7	11.2
70	26.4	27.0	28.0	22.9	4.22	3.78	4.48	4.25	4.29	21.8	27.2	25.9	25.9	24.9	23.7	20.5	3.73	3.30	3.77
75	13.0	13.5	13.8	2.60	2.38	2.19	2.64	2.56	2.54	2.61	12.2	11.3	11.8	10.9	10.2	2.14	1.97	1.96	2.14
80	2.10	2.24	1.57	1.11	0.78	0.50	0.45	0.47	0.65	1.02	1.36	1.72	1.82	1.66	1.24	0.88	0.35	0.14	0.15
85	0.77	0.73	0.06	0.08	0.09	0.08	0.08	0.07	0.07	0.07	0.05	0.39	0.67	0.51	0.07	0.06	0.04	0.02	0.01
90	0.02	0.03	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.01	0.01	0.04	0.06	0.07	0.06	0.05	0.05	0.04	0.04

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-31

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

