

Type:

Model:

**MIRAGE-V2 Aluminum
Integrated LED Uplight**

SPECIFICATIONS

HOUSING:

Cast aluminum.

FINISH:

Architectural bronze. Custom powder coated colors available.

LENS:

Tempered glass.

VOLTAGE:

12V AC/DC

WATTAGE:

12W and 16W.

OPTICS:

Beam spread 30°, 45°, 65°, 100°.

COLOR TEMPERATURE:

3000K and 5000K.

MOUNTING:

Stem threaded with 1/2" NPT.

WIRING:

Pre-wired with a five-foot pigtail of 18/2 cable.

WARRANTY:

Ten years.




489147
Opt. Extended Shroud
(8W/12W/16W)



The Mirage-V2 features an integrated LED source. 3000K and 5000K color temperatures. 30°, 45°, 65°, 100° beam spreads.

DIMENSIONS:

12W and 16W

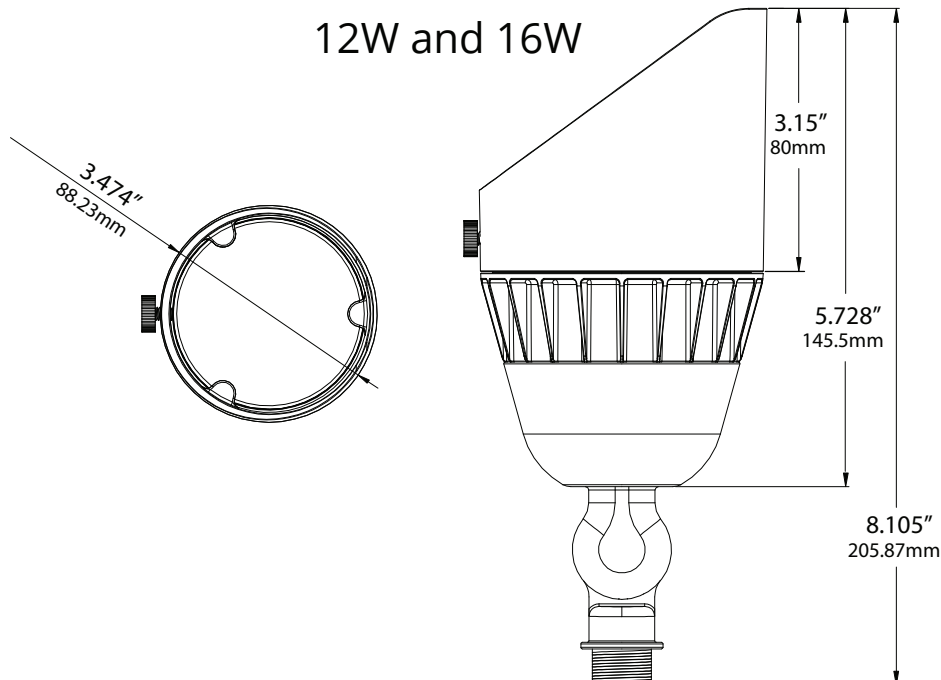

LED LAMP SPECIFICATIONS

LAMP TYPE:
Integrated LED.

OPTICS:
Integral optics providing available beam spreads of 30°, 45°, 65°, 100°.

COLOR TEMPERATURES:
3000K and 5000K.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489130



Model	489130	489131	489132	489133	489134	489135
Description	Mirage-V2-12W-12V-30K-30D	Mirage-V2-12W-12V-30K-45D	Mirage-V2-12W-12V-30K-65D	Mirage-V2-12W-12V-30K-100D	Mirage-V2-12W-12V-50K-65D	Mirage-V2-12W-12V-50K-100D
Wattage	12W	12W	12W	12W	12W	12W
Lumens	1199.4 lm	1125.9 lm	889.9 lm	729.1 lm	974.1 lm	787 lm
Efficacy	99.5 lm/W	93.8 lm/W	74.15 lm/W	60.76 lm/W	81.18 lm/W	65.58 lm/W
Volt Amps	14.44 VA	14.33 VA	14.50 VA	14.71 VA	13.77 VA	14.86 VA
Color Temperature	3000K	3000K	3000K	3000K	5000K	5000K
CRI	70	70	70	70	70	70
Beam Spread	30°	45°	65°	100°	65°	100°

LED LAMP SPECIFICATIONS

LAMP TYPE:
Integrated LED.

OPTICS:
Integral optics providing available beam spreads of 30°, 45°, 65°, 100°.

COLOR TEMPERATURES:
3000K and 5000K.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489130



Model	489140	489141	489142	489143	489144	489145
Description	Mirage-V2-16W-12V-30K-30D	Mirage-V2-16W-12V-30K-45D	Mirage-V2-16W-12V-30K-65D	Mirage-V2-16W-12V-30K-100D	Mirage-V2-16W-12V-50K-65D	Mirage-V2-16W-12V-50K-100D
Wattage	16W	16W	16W	16W	16W	16W
Lumens	1428.6 lm	1355.2 lm	1070.7 lm	883.8 lm	1228.2 lm	968.8 lm
Efficacy	89.29 lm/W	84.7 lm/W	66.92 lm/W	55.24 lm/W	76.76 lm/W	60.55 lm/W
Volt Amps	19.13 VA	18.68 VA	19.43 VA	20.06 VA	19.26 VA	18.41 VA
Color Temperature	3000K	3000K	3000K	3000K	5000K	5000K
CRI	70	70	70	70	70	70
Beam Spread	30°	45°	65°	100°	65°	100°