

Type:

Model:

**MIRAGE-V2 Aluminum  
Integrated LED Uplight**

**SPECIFICATIONS**

**HOUSING:**

Cast aluminum.

**FINISH:**

Architectural bronze. Custom powder coated colors available.

**LENS:**

Tempered glass.

**VOLTAGE:**

12V AC/DC

**WATTAGE:**

3W, 6W, 8W, 12W and 16W.

**OPTICS:**

Beam spread 30°, 45°, 65°, 100°.

**COLOR TEMPERATURE:**

2700K, 3000K and 5000K.

**MOUNTING:**

Stem threaded with 1/2" NPT.

**WIRING:**

Pre-wired with a five-foot pigtail of 18/2 cable.

**WARRANTY:**

Ten years.



489146  
Opt. Extended Shroud  
(3W/6W)


489147  
Opt. Extended Shroud  
(8W/12W/16W)



The Mirage-V2 features an integrated LED source. 2700K, 3000K and 5000K color temperatures. 30°, 45°, 65°, 100° beam spreads.

**DIMENSIONS:**

3W, 6W, 8W, 12W and 16W

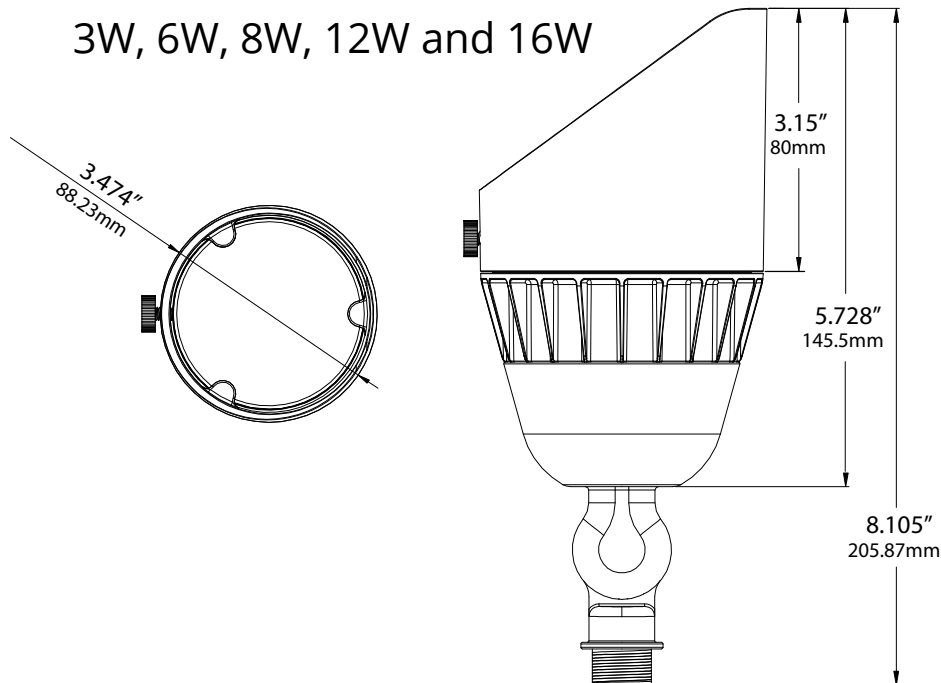

LED LAMP SPECIFICATIONS

**LAMP TYPE:**  
Integrated LED.

**OPTICS:**  
Integral optics providing available beam spreads of 30°, 45°, 65°, 100°.

**COLOR TEMPERATURES:**  
2700k, 3000K and 5000K.

**FIXTURE ORDERING INFORMATION**

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489100



Model	489100	489101	489102	489103	489104	489105	489106	489107
<b>Description</b>	Mirage-V2-3W-12V-27K-30D	Mirage-V2-3W-12V-27K-45D	Mirage-V2-3W-12V-27K-65D	Mirage-V2-3W-12V-27K-100D	Mirage-V2-3W-12V-30K-30D	Mirage-V2-3W-12V-30K-45D	Mirage-V2-3W-12V-30K-65D	Mirage-V2-3W-12V-30K-100D
<b>Wattage</b>	3W	3W	3W	3W	3W	3W	3W	3W
<b>Lumens</b>	290.1 lm	276.3 lm	245.9 lm	215.3 lm	304.1 lm	280.1 lm	253.2 lm	249.5 lm
<b>Efficacy</b>	95.7 lm/W	90.63 lm/W	80.66 lm/W	70.63 lm/W	99.77 lm/W	91.89 lm/W	83.07 lm/W	82.95 lm/W
<b>Volt Amps</b>	3.93 VA	3.94 VA	3.93 VA	3.94 VA	3.95 VA	3.95 VA	3.95 VA	3.92 VA
<b>Color Temperature</b>	2700K	2700K	2700K	2700K	3000K	3000K	3000K	3000K
<b>CRI</b>	70	70	70	70	70	70	70	70
<b>Beam Spread</b>	30°	45°	65°	100°	30°	45°	65°	100°

LED LAMP SPECIFICATIONS

**LAMP TYPE:**  
Integrated LED.

**OPTICS:**  
Integral optics providing available beam spreads of 30°, 45°, 65°, 100°.

**COLOR TEMPERATURES:**  
2700K, 3000K and 5000K.

**FIXTURE ORDERING INFORMATION**

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489108



Model	489108	489109	489110	489111	489112	489113	489114	489115
<b>Description</b>	Mirage-V2-6W-12V-27K-30D	Mirage-V2-6W-12V-27K-45D	Mirage-V2-6W-12V-27K-56D	Mirage-V2-6W-12V-27K-100D	Mirage-V2-6W-12V-30K-30D	Mirage-V2-6W-12V-30K-45D	Mirage-V2-6W-12V-30K-65D	Mirage-V2-6W-12V-30K-100D
<b>Wattage</b>	6W	6W	6W	6W	6W	6W	6W	6W
<b>Lumens</b>	387.2 lm	424.0 lm	358.9 lm	328.9 lm	378.1 lm	454.8 lm	394.8 lm	358.6 lm
<b>Efficacy</b>	61.02 lm/W	67.24 lm/W	56.84 lm/W	52.17 lm/W	59.59 lm/W	71.55 lm/W	62.23 lm/W	56.52 lm/W
<b>Volt Amps</b>	6.87 VA	6.83 VA	6.88 VA	6.47 VA	6.85 VA	6.52 VA	6.50 VA	6.50 VA
<b>Color Temperature</b>	2700K	2700K	2700K	2700K	2700K	2700K	3000K	3000K
<b>CRI</b>	70	70	70	70	70	70	70	70
<b>Beam Spread</b>	30	45°	65°	100°	30°	45°	65°	100°

LED LAMP SPECIFICATIONS

**LAMP TYPE:**  
Integrated LED.

**OPTICS:**  
Integral optics providing available beam spreads of 30°, 45°, 65°, 100°.

**COLOR TEMPERATURES:**  
2700K, 3000K and 5000K.

**FIXTURE ORDERING INFORMATION**

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489120



Model	489120	489121	489122	489124	489125	489130	489131	489132
<b>Description</b>	Mirage-V2-8W-12V-30K-30D	Mirage-V2-8W-12V-30K-45D	Mirage-V2-8W-12V-30K-65D	Mirage-V2-8W-12V-5K-65D	Mirage-V2-8W-12V-5K-100D	Mirage-V2-12W-12V-30K-30D	Mirage-V2-12W-12V-30K-45D	Mirage-V2-12W-12V-30K-65D
<b>Wattage</b>	8W	8W	8W	8W	8W	12W	12W	12W
<b>Lumens</b>	793.2 lm	754.0 lm	604.3 lm	721.7 lm	600.5 lm	1199.4 lm	1125.9 lm	889.9 lm
<b>Efficacy</b>	99.94 lm/W	94.19 lm/W	76.35 lm/W	87 lm/W	72.4 lm/W	99.5 lm/W	93.8 lm/W	74.15 lm/W
<b>Volt Amps</b>	8.65 VA	8.73 VA	8.63 VA	10.2 VA	10.1 VA	14.72 VA	14.76 VA	14.74 VA
<b>Color Temperature</b>	3000K	3000K	3000K	5000K	5000K	3000K	3000K	3000K
<b>CRI</b>	70	70	70	70	70	70	70	70
<b>Beam Spread</b>	30	45°	65°	65°	100°	30°	45°	65°

LED LAMP SPECIFICATIONS

**LAMP TYPE:**  
Integrated LED.

**OPTICS:**  
Integral optics providing available beam spreads of 30°, 45°, 65°, 100°.

**COLOR TEMPERATURES:**  
2700K, 3000K and 5000K.

**FIXTURE ORDERING INFORMATION**

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489133



Model	489133	489134	489135	489140	489141	489142	489143	489144	489145
<b>Description</b>	Mirage-V2-12W-12V-30K-100D	Mirage-V2-12W-12V-50K-65D	Mirage-V2-12W-12V-50K-100D	Mirage-V2-16W-12V-30K-30D	Mirage-V2-16W-12V-30K-45D	Mirage-V2-16W-12V-30K-65D	Mirage-V2-16W-12V-30K-100D	Mirage-V2-16W-12V-50K-65D	Mirage-V2-16W-12V-50K-100D
<b>Wattage</b>	12W	12W	12W	16W	16W	16W	16W	16W	16W
<b>Lumens</b>	729.1 lm	974.1 lm	787 lm	1428.6 lm	1355.2 lm	1070.7 lm	883.8 lm	1228.2 lm	968.8 lm
<b>Efficacy</b>	60.76 lm/W	81.18 lm/W	65.58 lm/W	89.29 lm/W	84.7 lm/W	66.92 lm/W	55.24 lm/W	76.76 lm/W	60.55 lm/W
<b>Volt Amps</b>	14.69 VA	14.35 VA	14.35 VA	19.03 VA	19.05 VA	19.01 VA	19.00 VA	19.42 VA	19.45 VA
<b>Color Temperature</b>	3000K	5000K	5000K	3000K	3000K	3000K	3000K	5000K	5000K
<b>CRI</b>	70	70	70	70	70	70	70	70	70
<b>Beam Spread</b>	100°	65°	100°	30°	45°	65°	100°	65°	100°