
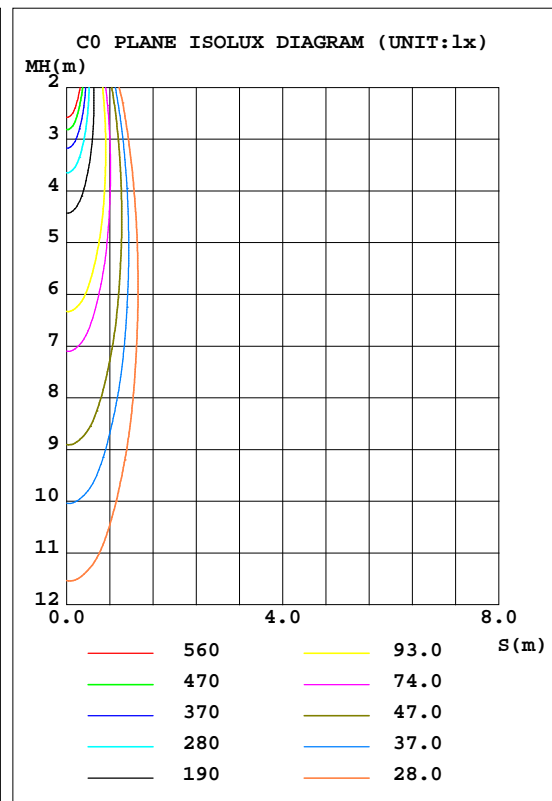


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:11.781V I:0.6887A P:6.1766W PF:0.7613 Freq:60.00Hz Lamp Flux:587.045x1 lm		
NAME: 486711-MR16-7W-2700K-15°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		I _{max} (cd)	3606	S/MH(C0/180)	0.29
NOMINAL POWER(W)	--	LOR(%)	100.0	S/MH(C90/270)	0.29
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	587.04	η UP, DN(C0-180)	0.0,50.3
NOMINAL FLUX(lm)	587.045	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,49.7
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	--	η down(%)	100.0	CIBSE SHR MAX	1.00

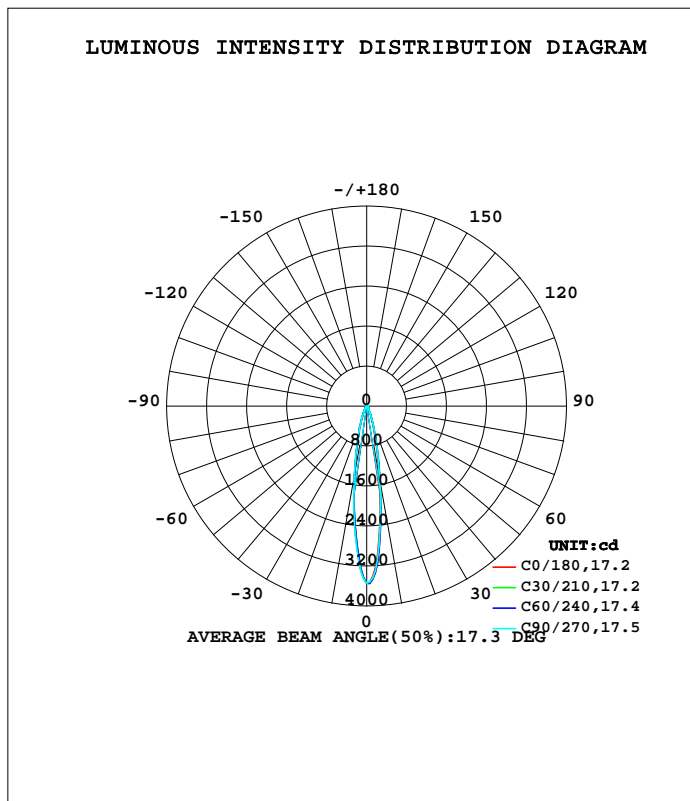

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1475	1569	1539	1434	1453	1402	1446	1572	0- 10	218.2	218.2	37.2,37.2
20	333.4	367.7	370.6	359.1	358.8	334.4	351.3	361.9	10- 20	207.8	426.0	72.6,72.6
30	84.73	97.56	100.7	98.34	100.5	87.15	92.63	92.03	20- 30	87.66	513.7	87.5,87.5
40	28.07	30.75	33.15	31.87	32.24	29.60	29.58	30.68	30- 40	34.00	547.7	93.3,93.3
50	15.87	17.57	17.84	17.28	17.29	16.40	16.63	17.43	40- 50	17.50	565.2	96.3,96.3
60	9.687	10.46	9.643	10.14	10.12	9.717	9.186	10.39	50- 60	11.85	577.0	98.3,98.3
70	5.620	5.338	3.046	5.216	5.687	4.946	3.320	5.612	60- 70	7.207	584.2	99.5,99.5
80	2.133	0.2513	0.0370	0.1892	2.109	0.1878	0.0317	0.3740	70- 80	2.614	586.8	100,100
90	0	0	0	0	0.0042	0.0015	0	0.0023	80- 90	0.2169	587.0	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 557.29 lm

%lum = 94.9%
%lamp = 94.9%

Conical surface Flux(120deg): 577.01 lm


%lum = 98.3%
%lamp = 98.3%

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:11.781V I:0.6887A P:6.1766W PF:0.7613 Freq:60.00Hz Lamp Flux:587.045x1 lm		
NAME: 486711-MR16-7W-2700K-15°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

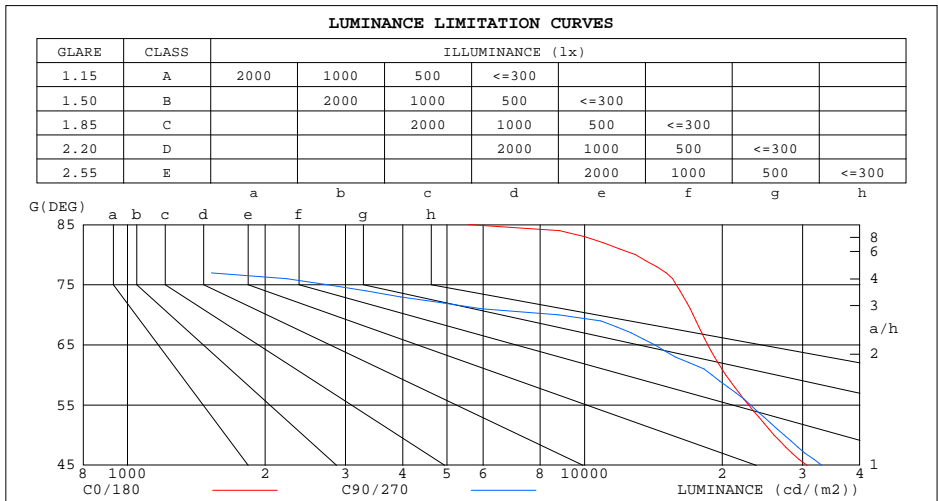

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	5579	1
80	12925	210
75	15865	2738
70	17291	8775
65	18611	14255
60	20385	19004
55	22874	23091
50	25976	27341
45	30701	33068


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:11.781V I:0.6887A P:6.1766W PF:0.7613 Freq:60.00Hz Lamp Flux:587.045x1 lm		
NAME: 486711-MR16-7W-2700K-15°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.06	1.03	1.00	1.05	1.02	.99	1.02	.99	.97	.99	.97	.95	.96	.94	.93	.92
3.0	1.01	.97	.94	.90	.96	.93	.97	.94	.92	.95	.93	.91	.93	.91	.89	.88
4.0	.97	.92	.89	.96	.92	.89	.94	.90	.88	.92	.89	.87	.90	.88	.86	.84
5.0	.93	.88	.85	.92	.88	.85	.90	.87	.84	.89	.86	.83	.87	.85	.83	.81
6.0	.89	.85	.82	.89	.84	.81	.87	.84	.81	.86	.83	.80	.85	.82	.80	.79
7.0	.86	.82	.79	.86	.81	.78	.85	.81	.78	.83	.80	.78	.83	.80	.77	.76
8.0	.83	.79	.76	.83	.79	.76	.82	.78	.76	.81	.78	.75	.80	.77	.75	.74
9.0	.81	.77	.74	.81	.76	.74	.80	.76	.73	.79	.76	.73	.78	.75	.73	.72
10.0	.79	.74	.72	.78	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.71	.70

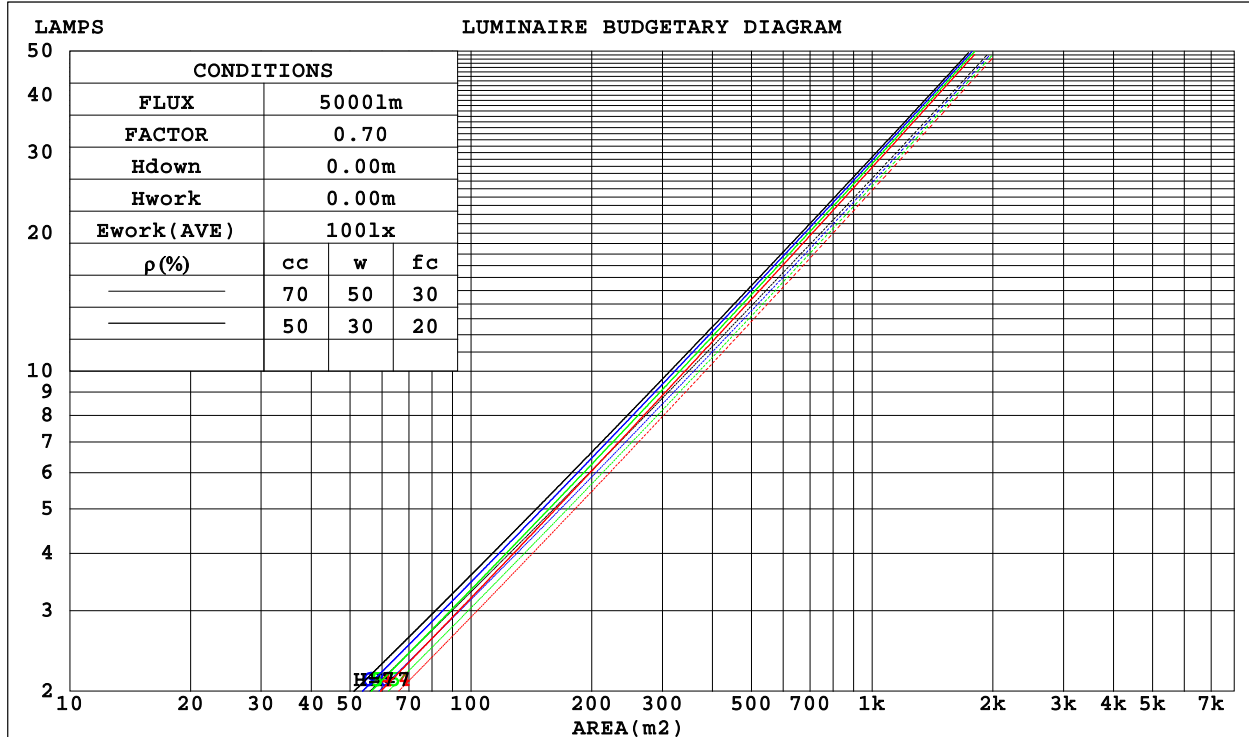

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:11.781V I:0.6887A P:6.1766W PF:0.7613 Freq:60.00Hz Lamp Flux:587.045x1 lm		
NAME: 486711-MR16-7W-2700K-15°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.149	.085	.027	.142	.081	.026	.130	.074	.024	.118	.068	.022	.108	.062	.020	
2.0	.139	.076	.023	.134	.074	.023	.123	.069	.021	.114	.064	.020	.105	.059	.019	
3.0	.130	.069	.021	.125	.067	.020	.117	.063	.019	.109	.059	.018	.101	.056	.017	
4.0	.122	.063	.019	.118	.062	.018	.110	.058	.017	.103	.056	.017	.097	.053	.016	
5.0	.114	.058	.017	.111	.057	.017	.105	.054	.016	.099	.052	.015	.093	.050	.015	
6.0	.108	.054	.015	.105	.053	.015	.099	.051	.015	.094	.049	.014	.090	.047	.014	
7.0	.102	.050	.014	.099	.049	.014	.095	.048	.014	.090	.046	.013	.086	.045	.013	
8.0	.097	.047	.013	.094	.046	.013	.090	.045	.013	.086	.044	.013	.083	.042	.012	
9.0	.092	.044	.012	.090	.044	.012	.086	.043	.012	.083	.042	.012	.080	.040	.012	
10.0	.088	.042	.012	.086	.042	.012	.083	.041	.011	.080	.040	.011	.077	.039	.011	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016	
2.0	.152	.133	.116	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.094	.118	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011	
4.0	.125	.098	.077	.108	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.115	.086	.064	.099	.074	.056	.068	.052	.040	.039	.031	.023	.013	.010	.008	
6.0	.106	.076	.054	.091	.066	.047	.063	.046	.034	.037	.027	.020	.012	.009	.007	
7.0	.099	.068	.046	.085	.059	.040	.059	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.092	.061	.040	.079	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.086	.056	.035	.075	.048	.030	.052	.034	.022	.030	.020	.013	.010	.007	.004	
10.0	.081	.051	.031	.070	.044	.027	.049	.031	.019	.028	.018	.011	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:11.781V I:0.6887A P:6.1766W PF:0.7613 Freq:60.00Hz Lamp Flux:587.045x1 lm										
NAME: 486711-MR16-7W-2700K-15°					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:35mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.8	18.5	18.0	18.6	18.8	17.7	18.4	17.9	18.6	18.7
3H	18.7	19.3	18.9	19.5	19.7	18.1	18.7	18.3	18.9	19.1
4H	19.1	19.7	19.3	19.9	20.1	18.0	18.6	18.3	18.8	19.1
6H	19.3	19.9	19.6	20.1	20.4	17.9	18.5	18.2	18.8	19.0
8H	19.4	19.9	19.7	20.2	20.4	17.9	18.5	18.2	18.7	19.0
12H	19.4	19.9	19.7	20.2	20.4	17.8	18.4	18.1	18.6	18.9
4H 2H	18.1	18.8	18.4	19.0	19.2	18.1	18.7	18.3	18.9	19.1
3H	19.2	19.8	19.5	20.0	20.3	18.5	19.0	18.8	19.3	19.6
4H	19.7	20.2	20.0	20.5	20.8	18.4	18.9	18.8	19.2	19.5
6H	20.0	20.5	20.4	20.8	21.2	18.3	18.8	18.7	19.1	19.4
8H	20.1	20.5	20.5	20.9	21.2	18.3	18.7	18.7	19.0	19.4
12H	20.1	20.5	20.5	20.9	21.2	18.2	18.6	18.6	19.0	19.4
8H 4H	19.7	20.1	20.1	20.4	20.8	18.5	18.9	18.8	19.2	19.6
6H	20.0	20.4	20.4	20.8	21.2	18.3	18.7	18.8	19.1	19.5
8H	20.1	20.4	20.5	20.8	21.3	18.3	18.6	18.7	19.0	19.4
12H	20.1	20.4	20.6	20.8	21.3	18.2	18.5	18.7	18.9	19.4
12H 4H	19.6	20.0	20.0	20.4	20.8	18.4	18.8	18.8	19.2	19.6
6H	20.0	20.3	20.4	20.7	21.1	18.3	18.6	18.7	19.0	19.5
8H	20.0	20.3	20.5	20.8	21.2	18.2	18.5	18.7	18.9	19.4
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.6					+ 0.9 / - 1.1				
1.5H	+ 0.5 / - 0.5					+ 1.3 / - 0.8				
2.0H	+ 0.6 / - 0.7					+ 1.1 / - 0.8				

CIE Pub.117, 587.0 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -1.9)
Area: 0.001 m2

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:11.781V I:0.6887A P:6.1766W PF:0.7613 Freq:60.00Hz Lamp Flux:587.045x1 lm		
NAME: 486711-MR16-7W-2700K-15°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	87	81	77	87	81	77	86	80	77	73
0.80	95	89	85	94	89	85	93	88	85	81
1.00	99	93	90	98	93	90	97	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	108	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	102	105	103	101	95
3.00	112	108	106	110	107	104	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:11.781V I:0.6887A P:6.1766W PF:0.7613 Freq:60.00Hz Lamp Flux:587.045x1 lm		
NAME: 486711-MR16-7W-2700K-15°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

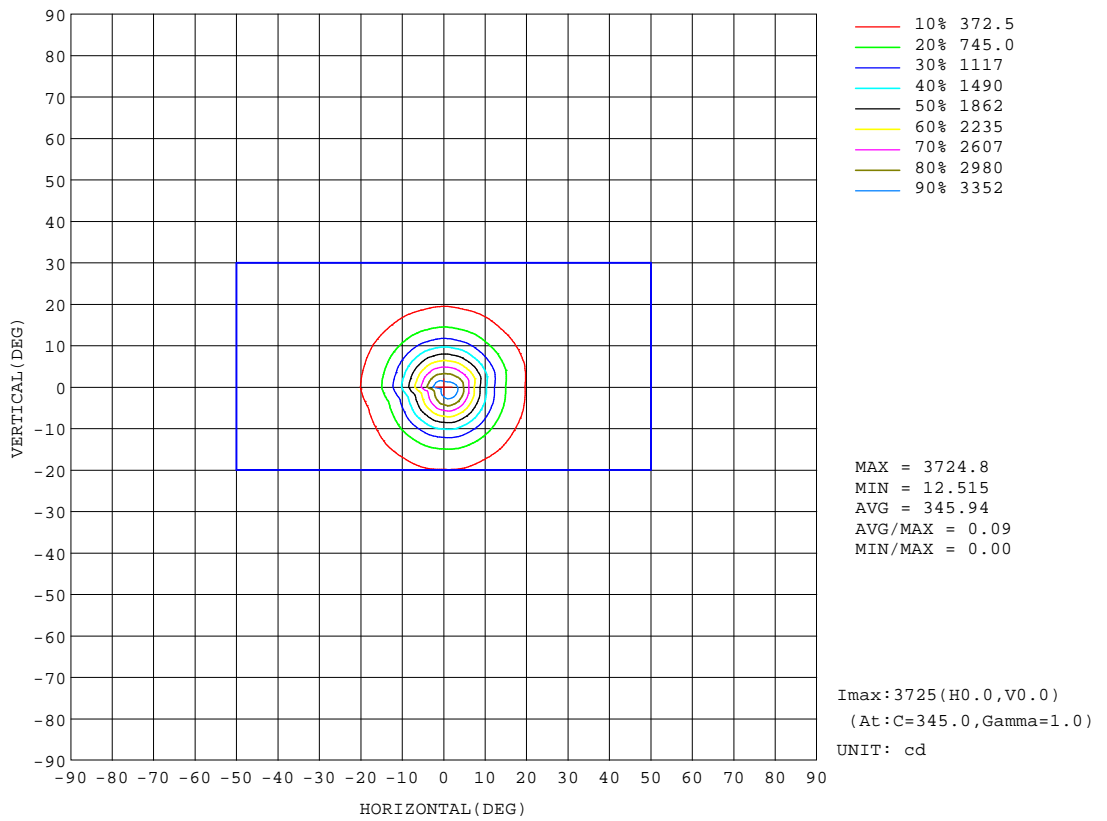


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:11.781V I:0.6887A P:6.1766W PF:0.7613 Freq:60.00Hz Lamp Flux:587.045x1 lm		
NAME: 486711-MR16-7W-2700K-15°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

Flux out:189.2 lm

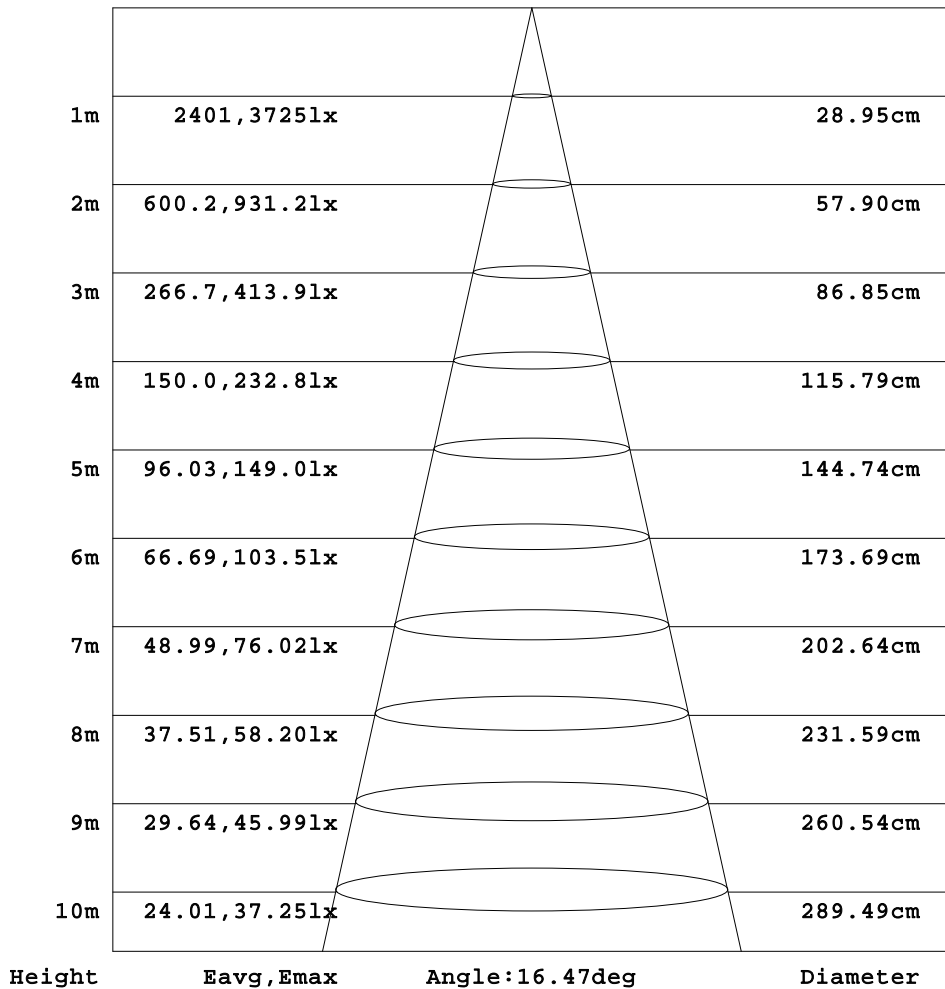


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:11.781V I:0.6887A P:6.1766W PF:0.7613 Freq:60.00Hz Lamp Flux:587.045x1 lm		
NAME: 486711-MR16-7W-2700K-15°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

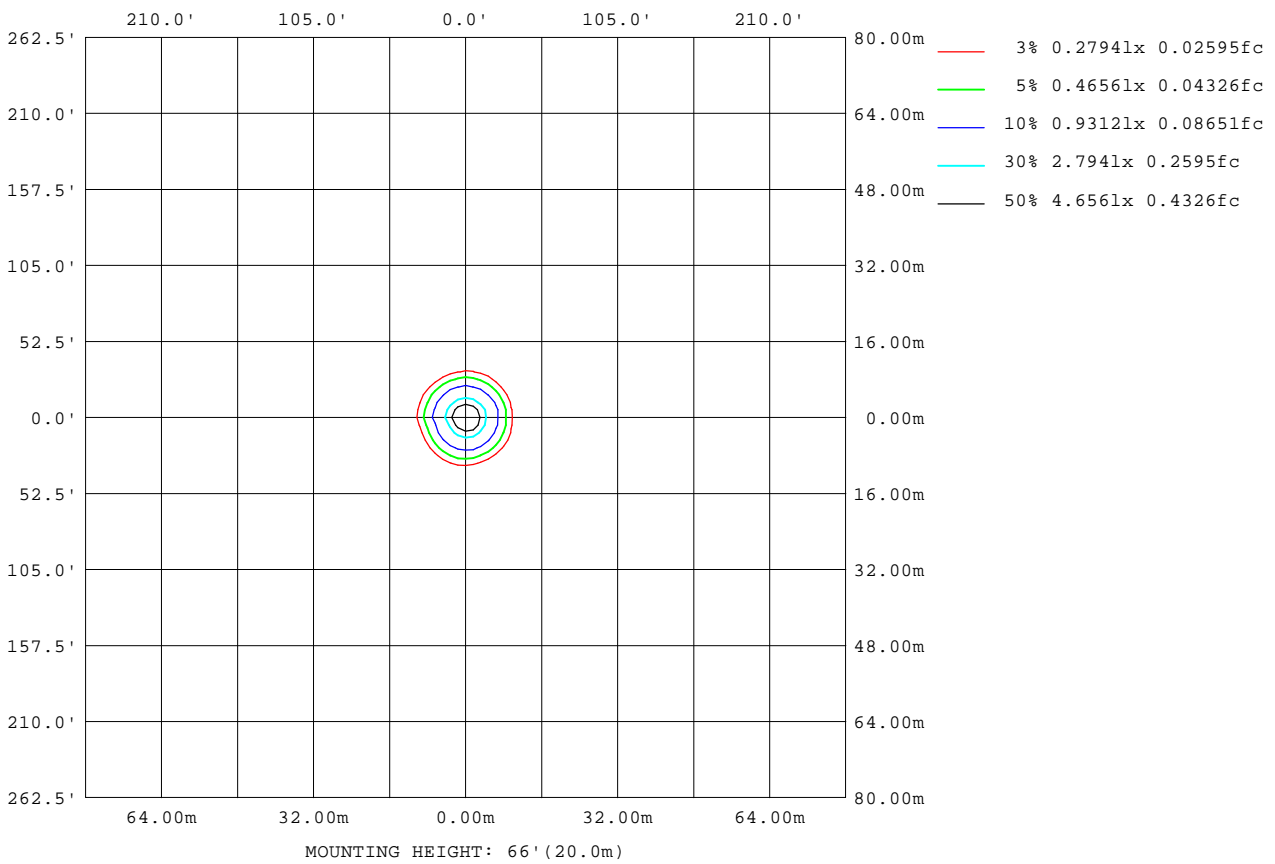

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:11.781V I:0.6887A P:6.1766W PF:0.7613 Freq:60.00Hz Lamp Flux:587.045x1 lm		
NAME: 486711-MR16-7W-2700K-15°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	17940
L_0~180(75)av	15052
L_0~180(85)av	5053
L_90~270(65)av	14392
L_90~270(75)av	2632
L_90~270(85)av	0
L_45(65)av	18175
L_45(75)av	8984
L_45(85)av	106

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-05-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

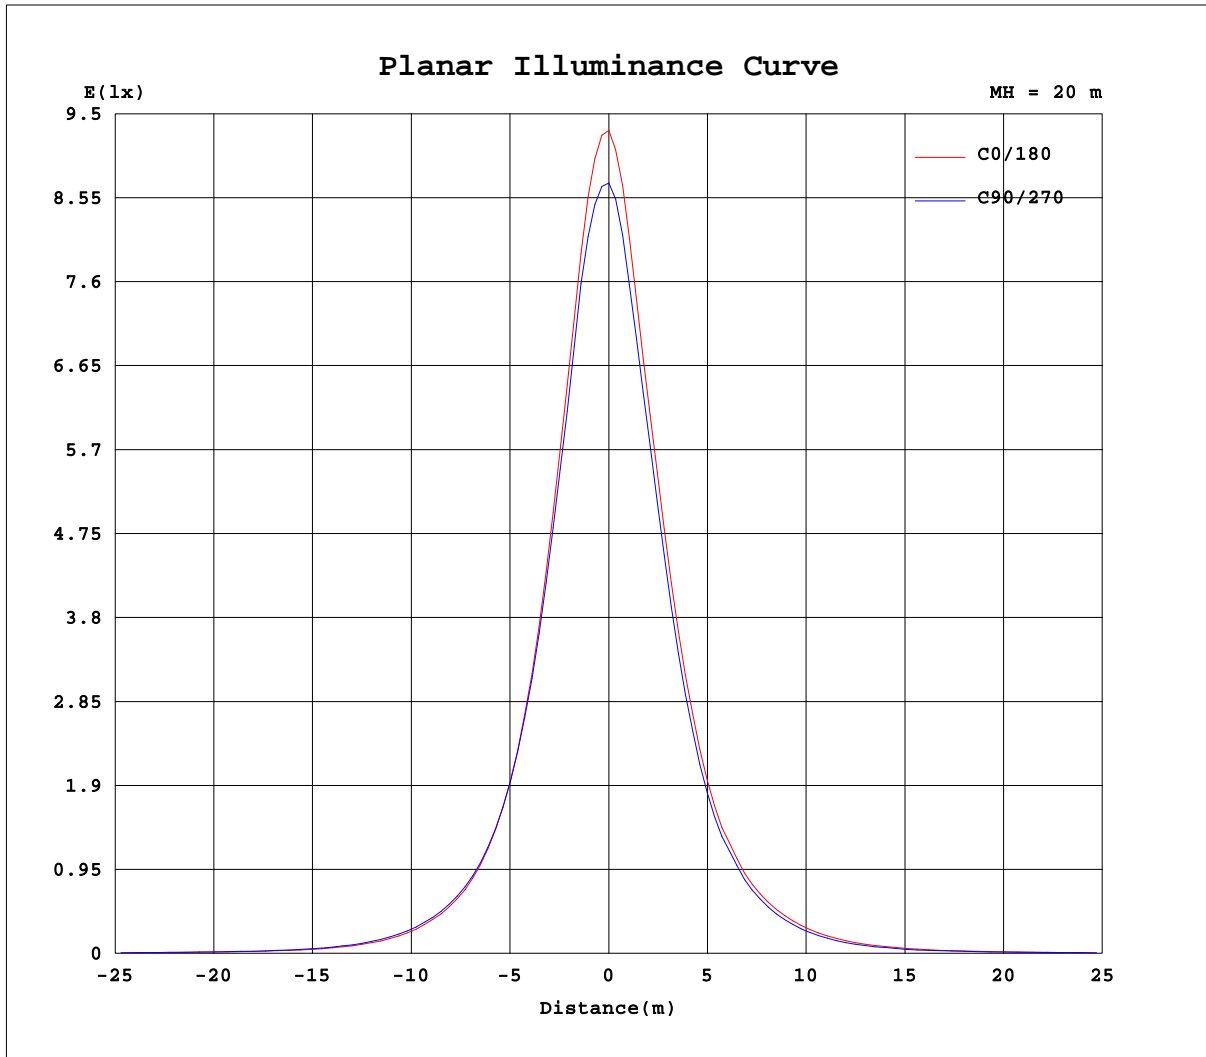

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-05-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.781V I:0.6887A P:6.1766W PF:0.7613 Freq:60.00Hz Lamp Flux:587.045x1 lm		
NAME: 486711-MR16-7W-2700K-15°	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:35mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	3540	3540	3540	3540	3540	3540	3540	3540	3540	3540	3540	3540	3540	3540	3540	3540	3540	3540	3540
5	2765	2845	2864	2892	2882	2899	2821	2775	2664	2607	2515	2457	2593	2545	2546	2527	2549	2554	2609
10	1475	1534	1548	1569	1564	1579	1539	1531	1463	1434	1370	1329	1453	1417	1411	1402	1412	1407	1446
15	698	727	736	756	755	768	746	744	715	701	667	645	706	689	687	679	683	680	699
20	333	354	354	368	364	379	371	380	363	359	338	333	359	347	347	334	338	334	351
25	170	181	186	187	184	191	194	202	194	188	177	175	190	188	185	172	167	169	180
30	84.7	93.6	96.5	97.6	93.6	98.4	101	107	99.4	98.3	91.3	92.2	100	97.4	97.8	87.1	85.0	84.1	92.6
35	46.0	50.4	51.2	52.7	51.7	54.4	55.6	58.5	55.2	55.0	51.7	52.3	55.6	53.8	53.5	48.4	47.6	46.8	50.9
40	28.1	29.1	30.5	30.7	31.3	32.0	33.2	33.4	32.7	31.9	31.5	31.1	32.2	32.0	30.9	29.6	28.3	28.8	29.6
45	20.6	21.2	22.4	22.5	22.9	23.2	23.7	23.5	23.1	22.6	22.7	22.5	22.7	22.7	21.8	21.4	20.6	20.9	21.4
50	15.9	16.4	17.3	17.6	17.4	17.7	17.8	17.7	17.6	17.3	17.3	17.2	17.3	17.2	16.7	16.4	16.1	16.3	16.6
55	12.5	12.8	13.6	13.7	13.2	13.4	13.4	13.3	13.3	13.2	13.2	13.1	13.3	13.2	12.8	12.7	12.6	12.6	12.7
60	9.69	9.86	10.5	10.5	9.92	9.75	9.64	9.69	9.99	10.14	10.14	10.04	10.1	10.0	9.76	9.72	9.55	9.35	9.19
65	7.48	7.56	7.93	7.86	6.91	6.26	6.11	6.31	7.05	7.67	7.75	7.65	7.69	7.56	7.40	7.31	6.82	6.20	6.05
70	5.62	5.69	5.83	5.34	3.99	3.48	3.05	3.43	4.14	5.22	5.69	5.61	5.69	5.58	5.41	4.95	4.00	3.50	3.32
75	3.90	3.97	3.86	2.27	0.91	0.75	0.72	0.78	0.96	2.11	3.65	3.76	3.89	3.80	3.51	2.11	0.84	0.69	0.64
80	2.13	2.17	0.88	0.25	0.03	0.03	0.04	0.03	0.02	0.19	0.67	1.78	2.11	2.00	0.66	0.19	0.03	0.03	0.03
85	0.46	0.23	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.42	0.13	0.01	0.01	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2022-05-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

