SPECIFICATION SHEET

Intertek



Туре:

Model:

DAVOS ALUMINUM INTEGRATED Path Light

SPECIFICATIONS

ORDER CODE:

489160-18-27K-60 489160-18-3K-60

HOUSING:

Cast aluminum. Adjustable shrouds with tension screws.

FINISH:

Architectural bronze. Custom powder coated colors available.

INTEGRATED LED:

3.5W, 60°, 2700K and 3000K color temperatures. 323Im at 27K, 351Im at 3K. 4.52VA.

LENS:

Clear tempered glass.

MOUNTING:

Stem threaded with 1/2" NPT. Heavy-duty slotted composite stake included. May be mounted into threaded hubs in junction boxes or mounting accessories.

WIRING:


Pre-wired with 5' pigtail of 18/2 cable.

WARRANTY:

10 years.



Custom sizes and configurations available.

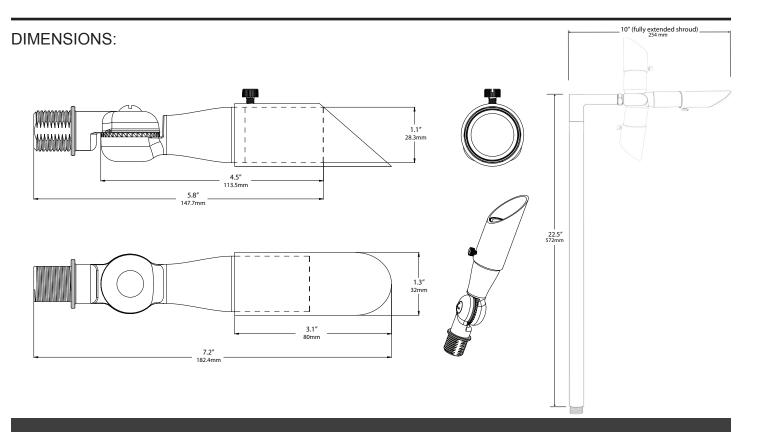

HQ: 10505 NW 112 Ave, Suite 18 | Miami, FL 33178 | Plant: 1430 Gould Blvd., Suite 3 | La Vergne, TN 37086 | 888. DAUER. LED Dauer Manufacturing.com