

Type:

Model:

BEVERLY LED MR16 Downlight

ORDERING CODE:

489982

SPECIFICATIONS

HOUSING:

Cast brass body and shroud with two O-rings.

FINISH:

Weathered brass. Custom powder coated colors available.

LENS:

No lens.

SOCKET/LAMP HOLDER:

One floating bi-pin socket with stainless steel retaining springs.

LAMP TYPE:

12V MR16. LED recommended. 30W halogen or 7W LED maximum.

MOUNTING:

90° adjustment knuckle. Stem threaded with 1/2" NPT. May be mounted into threaded hubs in junction boxes or mounting accessories.

WIRING:

Pre-wired with 5' pigtail of 18/2 cable.



WARRANTY:

Lifetime.



The Beverly downlight utilizes a 90° adjustment knuckle for the widest range of vertical tilt angles. Y-bracket mount included with additional mounting options available.

DIMENSIONS:

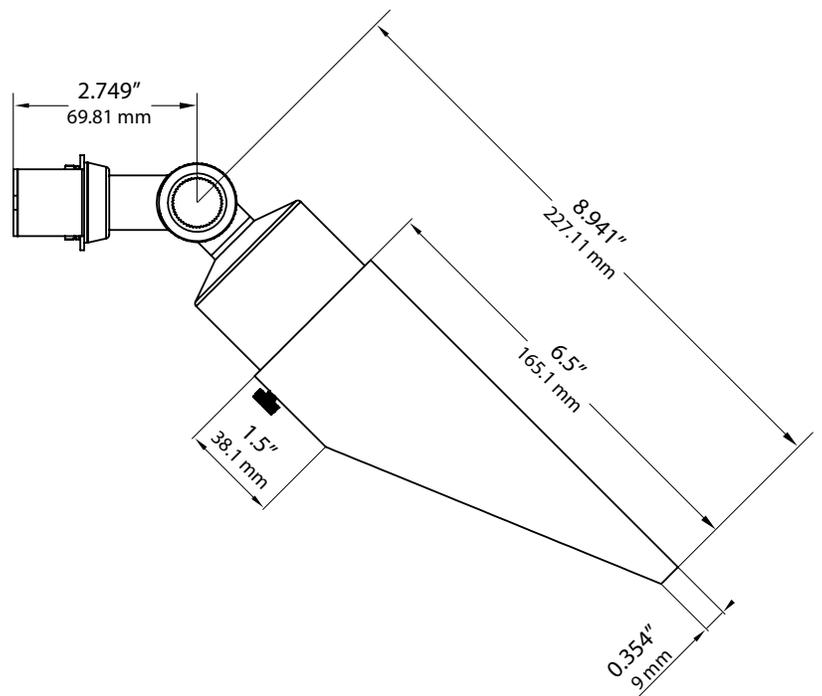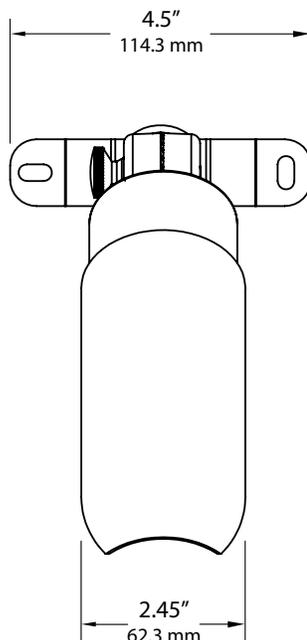

LED LAMP SPECIFICATIONS

LAMP TYPE:

12V Dauer MR16 lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 60°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K or 3000K. Decorative color light options include amber, blue, green, red and purple.

FIXTURE ORDERING INFORMATION

To order a lamped fixture with mounting options, select the appropriate choice from each column as in the following example:

EXAMPLE: 489982-4W-25-2700K-MY



FIXTURE	LAMP			MOUNTING	
	WATTAGE	BEAM SPREAD	COLOR TEMP.		
489982	2W	25° / 40° / 60°	2700K / 3000K	MY Y-bracket surface mount - included TH9 Tree Hugger Strap Kit 9"- Max 14" - 490330 TH15 Tree Hugger Strap Kit 15"- Max 22.5" - 490331 TH24 Tree Hugger Strap Kit 24"- Max 31.5" - 490332 TH36 Tree Hugger Strap Kit 36"- Max 46.5" - 490333 TH48 Tree Hugger Strap Kit 48"- Max 61.5" - 490334 TM Tree Mount - 490046 N Newhouse Brass Tree Mount J-Box - 490060 MSM Brass Micro Surface Mount - 490049 EM Round Electrical Mounting Plate 490043 RMP Rectangular Electrical Mounting Plate 490044	
	3W	25° / 40° / 60°	2700K / 3000K		
	4W	25° / 40° / 60°	2700K / 3000K		
	5W	15° / 25° / 40° / 60°			2700K / 3000K
		25°	Amber / Blue / Green / Red		
	5W	38°	Purple		
	6W	25° / 40° / 60°	2700K / 3000K		
	7W	15° / 30° / 45° / 60°	2700K / 3000K		