




KEY FEATURES | DFD321 MUSHROOM 11"

- Electronic Dimmable LED (120V Only)
- UL Listed for Damp Locations
- Ceiling or Wall Mount

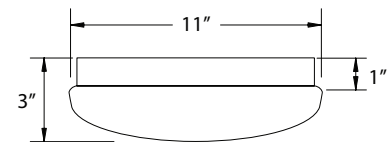

EXAMPLE # DFD321-LE800W-WWM

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS			
DFD321	DEDICATED 120V LED	ALUMINUM W-White	ACRYLIC W-White	M-Motion Sensor 120V only.			
	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE						
	LE800 - 13W, 80 CRI >88 Lumens Per Watt**				W-1020lm 3000K C-1280lm 4000K		
	LE1200 - 14W, 80 CRI >102 Lumens Per Watt**				W-1430lm 3000K C-1500lm 4000K		
	LE1800 - 22W, 80 CRI >88 Lumens Per Watt**				W-1950lm 3000K C-2130lm 4000K		
	DEDICATED 120V LED - LOW FLICKER 90 CRI						
	LT800 - 12W, 90 CRI >85 Lumens Per Watt**				W-1020lm 3000K C-1040lm 4000K		
	LT1200 - 16W, 90 CRI >86 Lumens Per Watt**				W-1370lm 3000K C-1400lm 4000K		
	LT1800 - 24W, 90 CRI >82 Lumens Per Watt**				W-1980lm 3000K C-2020lm 4000K		
	MULTI-VOLT 120-277V LED						
MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY							
L1300 - 17W, 80 CRI >75 Lumens Per Watt**	W-1278lm 3000K						
INCANDESCENT 120V							
INCANDESCENT, MEDIUM BASE, 120V							
I40-1 X 40W Max							
				LED LAMP, 3 YEAR WARRANTY, DIMMABLE LWE-A19/E26, 90CRI, 3000K LCE-A19/E26, 80CRI, 4000K			

Data per LM79/LM80/TM21 available upon request. Specification subject to change without notice.

DAUER's 120V LED Lamps and arrays were tested for compatibility with the below listed dimmers. The below compatibility chart can be used for guidance when selecting a dimmer and LED Lamp combination. Dimmers that do not appear on the chart may be compatible but have not been tested. Criteria includes level of dimmability and amount dimmer limits LED efficacy at dimmers 100% setting. Contact sales with questions.

All testing has been performed with a stable main supply. The quality of the existing installation and wiring may affect dimming performance. Since no assurance can be provided regarding these factors, it is a general recommendation to perform a test on site prior to installing LED Lamps.


Dimmer Compatibility Reference Key:

1 Best	2 Better	3 Good	X Non-Compatible
---------------	-----------------	---------------	-------------------------

Dimmer Manufacturer/ Model #	80CRI ARRAY				LOW FLICKER - 90CRI ARRAY				A19/E26
	L08-AC120R (LE800)	L12-AC120R (LE1200)	L18-AC120R (LE1800)	L26-AC120-7R (LE2600)	L08-AC120-2R9C (LT800)	L12-AC120-5R9C (LT1200)	L18-AC120-5R9C (LT1800)	L26-AC120-7R9C (LT2600)	LCE/LWE
LUTRON SELV-303P-WH	3	3	3	3	1	1	1	1	X
LUTRON S-600H-WH	1	1	1	1	X	X	X	X	X
LUTRON LG-603PH-AL	1	1	1	1	X	X	X	X	X
LEVITON IPL06-10Z	3	3	3	3	3	3	3	X	1
LUTRON NTLV-600	3	3	3	3	3	3	3	3	X
LEVITON 6631-LW	1	1	1	1	1	1	1	1	X
LUTRON CTC2-153P	1	1	X	X	2	3	3	X	X
LUTRON DVCL-153P	3	3	3	X	2	X	2	X	1
LUTRON TTC9-153P	X	X	X	X	3	3	3	X	X
LUTRON DIVA DVCL-153P	1	1	1	1	2	3	3	X	1
LUTRON MA-600-WH	3	3	3	3	X	X	X	X	X
LEVITON DECORA 6672	3	3	3	1	3	3	3	3	1
LEVITON 6674	3	1	1	1	3	3	X	X	1
LUTRON DV6200P-WH	1	1	1	1	X	X	X	X	X
LUTRON SKYLARK S-600P	1	1	1	1	X	X	X	X	X
LUTRON SKYLARK SELV-300P	3	3	3	3	1	1	1	1	X

EB - EMERGENCY BACKUP

- 135 Min. of Emergency Backup LED
- Test Switch/LED Charge Indicator
- 4W LED Backup Array
- NiCd, 3.6 VDC Battery
- 24hr Recharge Time
- Ambient Temp: 0°C to + 40°C
- 5yr Warranty

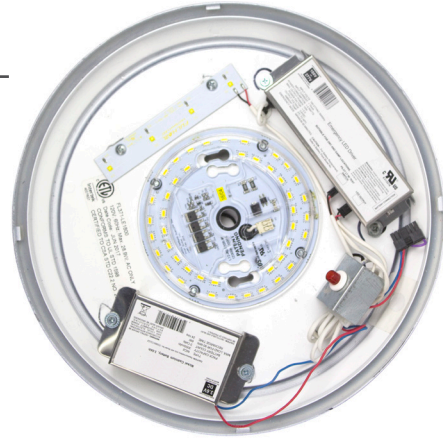

OUTDOOR FIXTURES EMERGENCY BACKUP OPTIONS



DFK391



DFL371



DFL372

INDOOR FIXTURES EMERGENCY BACKUP OPTIONS



DFD314



DFD324



DFM300