




### KEY FEATURES | DFD324 MUSHROOM 14"

- Electronic Dimmable LED (120V Only)
- UL Listed for Damp Locations
- Ceiling or Wall Mount

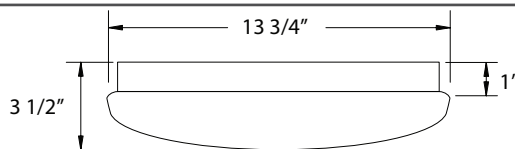

EXAMPLE # DFD324-I240-WW-LWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS	
DFD324	<b>DEDICATED 120V LED</b>	ALUMINUM W-White	ACRYLIC W-White	<b>M</b> -Motion Sensor 120V only . <b>EB</b> -Emergency Backup	
	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE				
	<b>LE1200</b> - 14W, 80 CRI				<b>W</b> -1430lm 3000K <b>C</b> -1500lm 4000K
	<b>LE1800</b> - 22W, 80 CRI				<b>W</b> -1950lm 3000K <b>C</b> -2130lm 4000K
	<b>LE2600</b> - 32W, 80 CRI				<b>W</b> -2700lm 3000K <b>C</b> -2750lm 4000K
	<b>DEDICATED 120V LED - LOW FLICKER 90 CRI</b>				
	<b>LT1200</b> - 16W, 90 CRI				<b>W</b> -1370lm 3000K <b>C</b> -1400lm 4000K
	<b>LT1800</b> - 24W, 90 CRI				<b>W</b> -1980lm 3000K <b>C</b> -2020lm 4000K
	<b>LT2600</b> - 31W, 90 CRI				<b>W</b> -2750lm 3000K <b>C</b> -2850lm 4000K
	<b>MULTI-VOLT 120-277V LED</b>				
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY				
<b>L1700</b> - 22W, 80 CRI	<b>W</b> -1704lm 3000K <b>C</b> -1824lm 4000K				
<b>INCANDESCENT 120V</b>		LED LAMP, 3 YEAR WARRANTY, DIMMABLE <b>LWE</b> -A19/E26, 90CRI, 3000K <b>LCE</b> -A19/E26, 80CRI, 4000K			
INCANDESCENT, MEDIUM BASE, 120V					
<b>I240-2 X 40W Max</b>					

Data per LM79/LM80/TM21 available upon request. Specification subject to change without notice.

DAUER's 120V LED Lamps and arrays were tested for compatibility with the below listed dimmers. The below compatibility chart can be used for guidance when selecting a dimmer and LED Lamp combination. Dimmers that do not appear on the chart may be compatible but have not been tested. Criteria includes level of dimmability and amount dimmer limits LED efficacy at dimmers 100% setting. Contact sales with questions.

All testing has been performed with a stable main supply. The quality of the existing installation and wiring may affect dimming performance. Since no assurance can be provided regarding these factors, it is a general recommendation to perform a test on site prior to installing LED Lamps.


**Dimmer Compatibility Reference Key:**

<b>1</b> Best	<b>2</b> Better	<b>3</b> Good	<b>X</b> Non-Compatible
---------------	-----------------	---------------	-------------------------

Dimmer Manufacturer/ Model #	80CRI ARRAY				LOW FLICKER - 90CRI ARRAY				A19/E26
	L08-AC120R (LE800)	L12-AC120R (LE1200)	L18-AC120R (LE1800)	L26-AC120-7R (LE2600)	L08-AC120-2R9C (LT800)	L12-AC120-5R9C (LT1200)	L18-AC120-5R9C (LT1800)	L26-AC120-7R9C (LT2600)	LCE/LWE
LUTRON SELV-303P-WH	3	3	3	3	1	1	1	1	X
LUTRON S-600H-WH	1	1	1	1	X	X	X	X	X
LUTRON LG-603PH-AL	1	1	1	1	X	X	X	X	X
LEVITON IPL06-10Z	3	3	3	3	3	3	3	X	1
LUTRON NTLV-600	3	3	3	3	3	3	3	3	X
LEVITON 6631-LW	1	1	1	1	1	1	1	1	X
LUTRON CTC2-153P	1	1	X	X	2	3	3	X	X
LUTRON DVCL-153P	3	3	3	X	2	X	2	X	1
LUTRON TTC9-153P	X	X	X	X	3	3	3	X	X
LUTRON DIVA DVCL-153P	1	1	1	1	2	3	3	X	1
LUTRON MA-600-WH	3	3	3	3	X	X	X	X	X
LEVITON DECORA 6672	3	3	3	1	3	3	3	3	1
LEVITON 6674	3	1	1	1	3	3	X	X	1
LUTRON DV6200P-WH	1	1	1	1	X	X	X	X	X
LUTRON SKYLARK S-600P	1	1	1	1	X	X	X	X	X
LUTRON SKYLARK SELV-300P	3	3	3	3	1	1	1	1	X

## EB - EMERGENCY BACKUP

- 135 Min. of Emergency Backup LED
- Test Switch/LED Charge Indicator
- 4W LED Backup Array
- NiCd, 3.6 VDC Battery
- 24hr Recharge Time
- Ambient Temp: 0°C to + 40°C
- 5yr Warranty

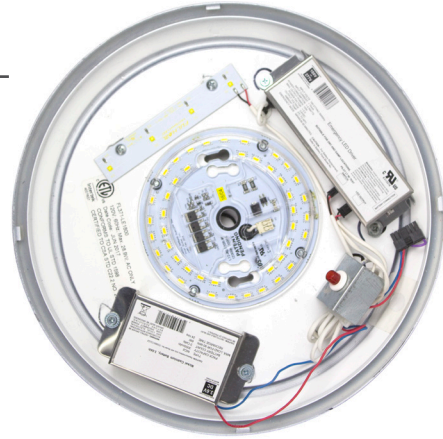

## OUTDOOR FIXTURES EMERGENCY BACKUP OPTIONS



DFK391



DFL371



DFL372

## INDOOR FIXTURES EMERGENCY BACKUP OPTIONS



DFD314



DFD324



DFM300