




KEY FEATURES | DFM300 MALIBU

- Electronic Dimmable LED (120V Only)
- UL Listed for Damp Locations
- Direct/Indirect Light
- Ceiling or Pendant Mount

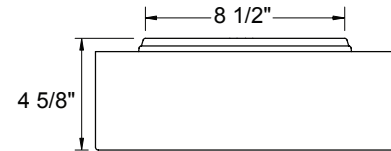

EXAMPLE # DFM300-LE1200W-NWM

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
DFM300	DEDICATED 120V LED	N-Brushed Nickel	ACRYLIC W-White	M-Motion Sensor 120V only. D-6"/13" Pendant Kit (KIT-DFM302) EB-Emergency Backup
	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE			
	LE1200 - 14W, 80 CRI W -1430lm 3000K >102 Lumens Per Watt** C -1500lm 4000K			
	LE1800 - 22W, 80 CRI W -1950lm 3000K >88 Lumens Per Watt** C -2130lm 4000K			
	LE2600 - 32W, 80 CRI W -2700lm 3000K >84 Lumens Per Watt** C -2750lm 4000K			
	DEDICATED 120V LED - LOW FLICKER 90 CRI			
	LT1200 - 16W, 90 CRI W -1370lm 3000K >86 Lumens Per Watt** C -1400lm 4000K			
	LT1800 - 24W, 90 CRI W -1980lm 3000K >82 Lumens Per Watt** C -2020lm 4000K			
	LT2600 - 31W, 90 CRI W -2750lm 3000K >90 Lumens Per Watt** C -2850lm 4000K			
	INCANDESCENT 120V			
INCANDESCENT, MEDIUM BASE, 120V				
I240-2 X 40W Max				

Data per LM79/LM80/TM21 available upon request. Specification subject to change without notice.

DAUER's 120V LED Lamps and arrays were tested for compatibility with the below listed dimmers. The below compatibility chart can be used for guidance when selecting a dimmer and LED Lamp combination. Dimmers that do not appear on the chart may be compatible but have not been tested. Criteria includes level of dimmability and amount dimmer limits LED efficacy at dimmers 100% setting. Contact sales with questions.

All testing has been performed with a stable main supply. The quality of the existing installation and wiring may affect dimming performance. Since no assurance can be provided regarding these factors, it is a general recommendation to perform a test on site prior to installing LED Lamps.


Dimmer Compatibility Reference Key:

1 Best	2 Better	3 Good	X Non-Compatible
---------------	-----------------	---------------	-------------------------

Dimmer Manufacturer/ Model #	80CRI ARRAY				LOW FLICKER - 90CRI ARRAY				A19/E26
	L08-AC120R (LE800)	L12-AC120R (LE1200)	L18-AC120R (LE1800)	L26-AC120-7R (LE2600)	L08-AC120-2R9C (LT800)	L12-AC120-5R9C (LT1200)	L18-AC120-5R9C (LT1800)	L26-AC120-7R9C (LT2600)	LCE/LWE
LUTRON SELV-303P-WH	3	3	3	3	1	1	1	1	X
LUTRON S-600H-WH	1	1	1	1	X	X	X	X	X
LUTRON LG-603PH-AL	1	1	1	1	X	X	X	X	X
LEVITON IPL06-10Z	3	3	3	3	3	3	3	X	1
LUTRON NTLV-600	3	3	3	3	3	3	3	3	X
LEVITON 6631-LW	1	1	1	1	1	1	1	1	X
LUTRON CTC2-153P	1	1	X	X	2	3	3	X	X
LUTRON DVCL-153P	3	3	3	X	2	X	2	X	1
LUTRON TTC9-153P	X	X	X	X	3	3	3	X	X
LUTRON DIVA DVCL-153P	1	1	1	1	2	3	3	X	1
LUTRON MA-600-WH	3	3	3	3	X	X	X	X	X
LEVITON DECORA 6672	3	3	3	1	3	3	3	3	1
LEVITON 6674	3	1	1	1	3	3	X	X	1
LUTRON DV6200P-WH	1	1	1	1	X	X	X	X	X
LUTRON SKYLARK S-600P	1	1	1	1	X	X	X	X	X
LUTRON SKYLARK SELV-300P	3	3	3	3	1	1	1	1	X

EB - EMERGENCY BACKUP

- 135 Min. of Emergency Backup LED
- Test Switch/LED Charge Indicator
- 4W LED Backup Array
- NiCd, 3.6 VDC Battery
- 24hr Recharge Time
- Ambient Temp: 0°C to + 40°C
- 5yr Warranty

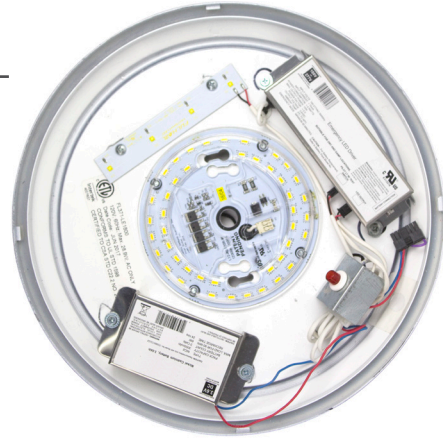

OUTDOOR FIXTURES EMERGENCY BACKUP OPTIONS



DFK391



DFL371



DFL372

INDOOR FIXTURES EMERGENCY BACKUP OPTIONS



DFD314



DFD324



DFM300