




DFD154

## KEY FEATURES | DFD154 DECO AREA


- Powder Coated Aluminum Body
- Polycarbonate Lens
- ETL Listed for Wet Locations
- Wall Mount Only
- Photocell Included
- Mounting Hardware Included



SEE SPEC SHEET  
FOR DIRECT BURIAL  
RESIDENTIAL POSTS



EXAMPLE # DFD154-LE500C-ZCP

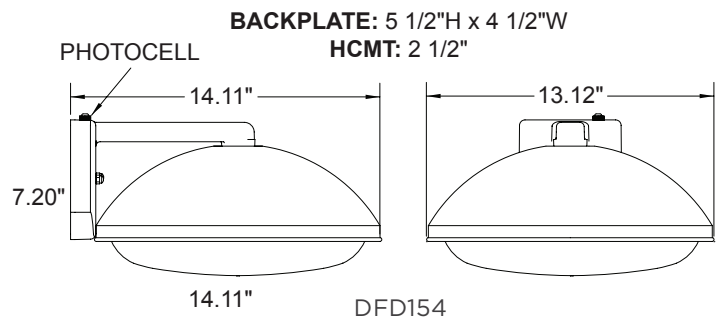

| STYLE # | LIGHT SOURCE                                                                                                                                                                                                                                | BODY            | DIFFUSER                                   |                                             |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------------------------------|---------------------------------------------|
| DFD154  | <p><b>DEDICATED 120V LED</b></p> <p>EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE</p> <p><b>LE500</b> - 52W, 80 CRI      <b>C-5000lm</b> 4000K<br/>&gt;96 Lumens Per Watt**</p> | <b>Z-Bronze</b> | <p>POLYCARBONATE</p> <p><b>C-Clear</b></p> | <b>P-Photocell Only</b> Photocell Included. |

Data per LM79/LM80/TM21 available upon request. Specification subject to change without notice.