





KEY FEATURES | DFK391 | DFK395 PROTEK

- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Ceiling or Wall Mount
- Mounting Hardware Included
- Knockouts for Conduit Installation

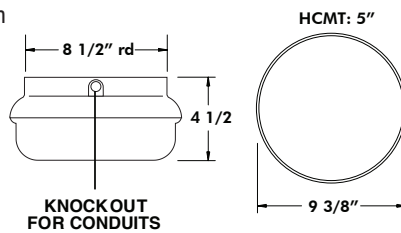

DFK391

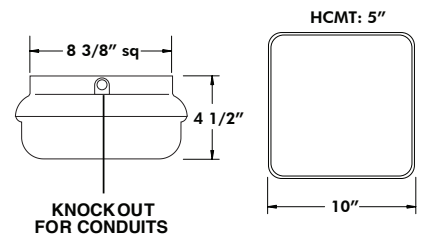

DFK395

EXAMPLE # DFK391-LE800W-BW-PLWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
DFK391 DFK395	DEDICATED 120V LED EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE800 - 13W, 80 CRI >88 Lumens Per Watt** LE1200 - 14W, 80 CRI >102 Lumens Per Watt** LE1800 - 22W, 80 CRI >88 Lumens Per Watt** W-1140lm 3000K C-1280lm 4000K W-1430lm 3000K C-1500lm 4000K W-1950lm 3000K C-2130lm 4000K	B-Black W-White	POLYCARBONATE W-White	P-Photocell 120V only. EB-Emergency Backup
	MULTI-VOLT 120-277V LED MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY L1800 - 22W, Power Input CRI 74 (TYP) >82 Lumens Per Watt** W-1704lm 3000K C-1824lm 4000K			EB-Emergency Backup
	INCANDESCENT 120V INCANDESCENT, MEDIUM BASE, 120V I240-2 X 40W Max			P-Photocell 120V only. LED LAMP, 3 YEAR WARRANTY, DIMMABLE LWE-A19/E26, 90CRI, 3000K LCE-A19/E26, 80CRI, 4000K

Data per LM79/LM80/TM21 available upon request. Specification subject to change without notice.

DAUER's 120V LED Lamps and arrays were tested for compatibility with the below listed dimmers. The below compatibility chart can be used for guidance when selecting a dimmer and LED Lamp combination. Dimmers that do not appear on the chart may be compatible but have not been tested. Criteria includes level of dimmability and amount dimmer limits LED efficacy at dimmers 100% setting. Contact sales with questions.

All testing has been performed with a stable main supply. The quality of the existing installation and wiring may affect dimming performance. Since no assurance can be provided regarding these factors, it is a general recommendation to perform a test on site prior to installing LED Lamps.


Dimmer Compatibility Reference Key:

1 Best	2 Better	3 Good	X Non-Compatible
---------------	-----------------	---------------	-------------------------

Dimmer Manufacturer/ Model #	80CRI ARRAY				LOW FLICKER - 90CRI ARRAY				A19/E26
	L08-AC120R (LE800)	L12-AC120R (LE1200)	L18-AC120R (LE1800)	L26-AC120-7R (LE2600)	L08-AC120-2R9C (LT800)	L12-AC120-5R9C (LT1200)	L18-AC120-5R9C (LT1800)	L26-AC120-7R9C (LT2600)	LCE/LWE
LUTRON SELV-303P-WH	3	3	3	3	1	1	1	1	X
LUTRON S-600H-WH	1	1	1	1	X	X	X	X	X
LUTRON LG-603PH-AL	1	1	1	1	X	X	X	X	X
LEVITON IPL06-10Z	3	3	3	3	3	3	3	X	1
LUTRON NTLV-600	3	3	3	3	3	3	3	3	X
LEVITON 6631-LW	1	1	1	1	1	1	1	1	X
LUTRON CTC2-153P	1	1	X	X	2	3	3	X	X
LUTRON DVCL-153P	3	3	3	X	2	X	2	X	1
LUTRON TTC9-153P	X	X	X	X	3	3	3	X	X
LUTRON DIVA DVCL-153P	1	1	1	1	2	3	3	X	1
LUTRON MA-600-WH	3	3	3	3	X	X	X	X	X
LEVITON DECORA 6672	3	3	3	1	3	3	3	3	1
LEVITON 6674	3	1	1	1	3	3	X	X	1
LUTRON DV6200P-WH	1	1	1	1	X	X	X	X	X
LUTRON SKYLARK S-600P	1	1	1	1	X	X	X	X	X
LUTRON SKYLARK SELV-300P	3	3	3	3	1	1	1	1	X

EB - EMERGENCY BACKUP

- 135 Min. of Emergency Backup LED
- Test Switch/LED Charge Indicator
- 4W LED Backup Array
- NiCd, 3.6 VDC Battery
- 24hr Recharge Time
- Ambient Temp: 0°C to + 40°C
- 5yr Warranty

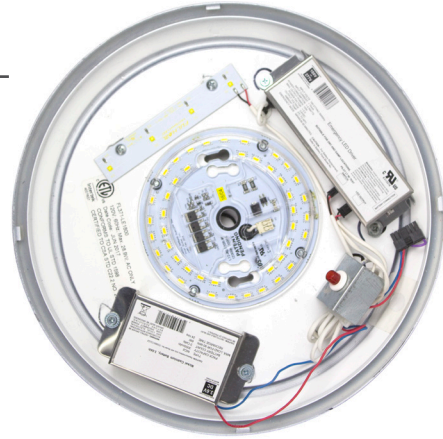

OUTDOOR FIXTURES EMERGENCY BACKUP OPTIONS



DFK391



DFL371



DFL372

INDOOR FIXTURES EMERGENCY BACKUP OPTIONS



DFD314



DFD324



DFM300