





DFP221

KEY FEATURES | DFP221 PRINCETON POST

- Fade & Rust Resistant Composite Construction
- UL Listed for Wet Locations
- Fits 3" Diameter Post



SEE SPEC SHEET
FOR DIRECT BURIAL
RESIDENTIAL POSTS

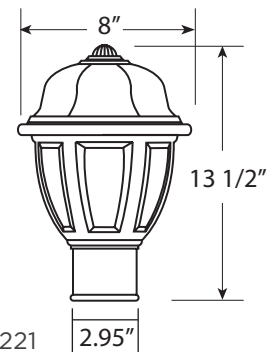

DFP221



EXAMPLE # DFP221-I60-BC-LWE

STYLE #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
DFP221	DEDICATED 120V LED	B-Black W-White	ACRYLIC C-Clear	N/A
	EOS LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE800 - 13W, 80 CRI W-1140lm 3000K >88 Lumens Per Watt** C-1280lm 4000K			
	INCANDESCENT 120V			
	INCANDESCENT, MEDIUM BASE, 120V I60-1 X 60W Max			LED LAMP, 3 YEAR WARRANTY DIMMABLE LWE-A19/E26, 90CRI, 3000K LCE-A19/E26, 80CRI, 4000K

Data per LM79/LM80/TM21 available upon request. Specification subject to change without notice.