



DRPL-008

## PRODUCT OVERVIEW/DRPL-008

This attractive, newly redesigned heavy-duty bollard features an aluminum housing, providing corrosion and tamper resistance. Ideal for lighting pedestrian walkways, as well as accenting the exterior grounds of office and apartment buildings, hotel and parks. A solid foundation withstands the elements, driver options work in even the worst weather conditions.

Optional mounting and Kelvin color\* with adder.



## KEY FEATURES

### LISTING

- UL- and CUL-listed for wet locations

### HOUSING

- Consisting of an extruded aluminium alloy body
- Standard 4kV Surge

### FINISH

- UV stabilized powder coated finish

### LENS

- High-impact polycarbonate diffuser

### OPTIONS


- Anodized aluminum reflector
- Finish - Bronze

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture.

Actual production units may vary from the values reported here by up to +10%.

## SPECIFICATION

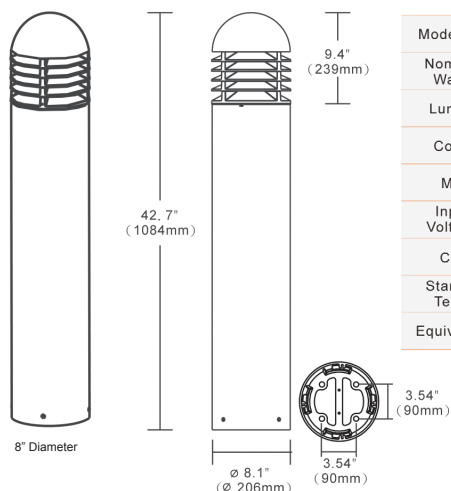

Model No.	▶	DRPL-008
Nominal Watts	▶	40
Lumen	▶	740 lm
Color	▶	5000K
MA	▶	950MA
Input Voltage	▶	120~277V
CRI	▶	70+
Starting Temp	▶	-40°C
Equivalent	▶	100W MH