



CRAWLEY
DRPL-10B-C

DUKE
DRPL-10B-S

PRODUCT OVERVIEW

This attractive, newly redesigned heavy-duty bollard feature an aluminum construction housing, providing corrosion and tamper resistance ideal for lighting pedestrian walkways, as well as accenting the exterior grounds of office and apartment buildings, hotel and parks. A solid foundation withstands the elements, driver options work in even the worst weather conditions.



KEY FEATURES

LISTING

- UL- and CUL-listed for wet locations

HOUSING

- Consisting of an extruded aluminium alloy body
- Standard 4kV Surge

FINISH

UV stabilized powder coated finish

LENS

- High-impact polycarbonate diffuser

OPTIONS

- Anodized aluminum reflector
- Finish - Bronze

APPLICATIONS

	Hotels
	Commercial Buildings
	Schools & Colleges

• Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote. **DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

PRODUCT DESCRIPTION



• Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote. •DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

PERFORMANCE DATA

Model No.	Nominal Watts	Dist. Type	Lumen*	Efficacy*
DRPL-10B-C/S	18 W	Type V	2035 lm*	113 lm/w*
	36 W	Type V	3960 lm*	110 lm/w*
* Lumen and efficacy are based on 5000K				

SPECIFICATIONS


Example: DRPL-10B018UNV750-XS-C

Model No.	Nominal Watts	Input Voltage	CRI	Color Temp	Option	Feature	Finish	Starting Temp
DRPL-10B	018=18W	UNV=120-277V	7=70+	40=4000K	XS= 10kV Surge	C=Cylinder	BN=Bronze	-40°C
	036=36W			50=5000K	2S= 20kV Surge	S=Sphere		





• Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote. •DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



DIMENSIONS

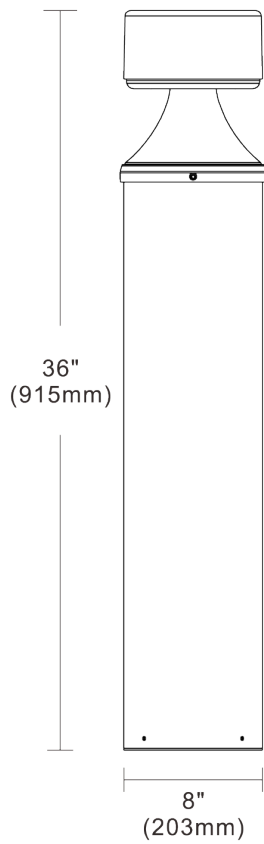

CRAWLEY
DRPL-10B-C

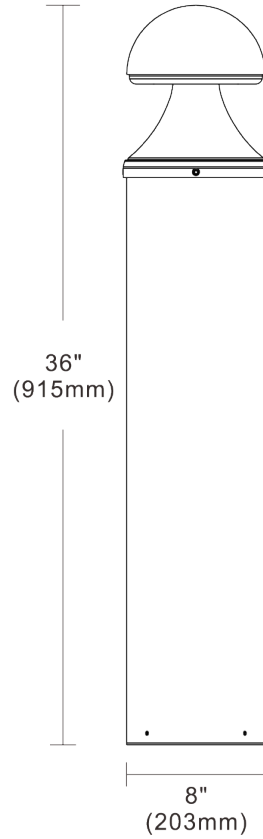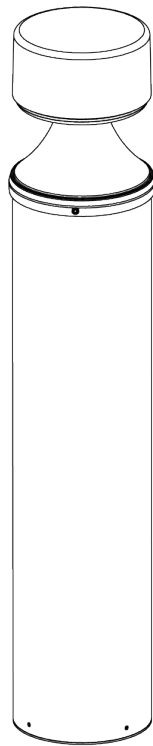

DUKE
DRPL-10B-S

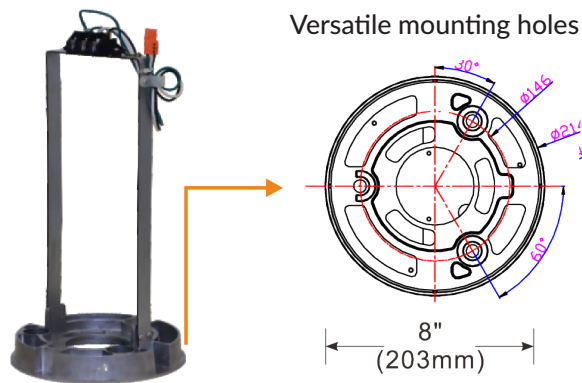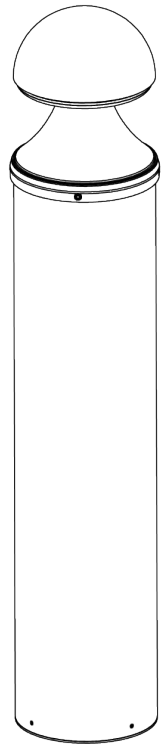

• Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote. •DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.