



ATWATER  
DRPL-5510

KINGSLEY  
DRPL-5520

## PRODUCT OVERVIEW

This attractive and newly redesigned heavy-duty bollard features an aluminum constructed housing. It provides corrosion and tamper resistance that is not only ideal for lighting pedestrian walkways, but also for accenting the exterior ground of office and apartment buildings, hotels and parks. A solid foundation withstands the elements and driver even in the worst weather conditions. The upgraded color tuning switch allows easy access to a range of CCTs based on different environments.



## KEY FEATURES

### LISTING

- UL- and CUL-listed for wet locations

### HOUSING

- Consisting of an extruded aluminium alloy body
- Standard 4kV Surge

### FINISH

UV stabilized powder coated finish

### LENS

- High-impact polycarbonate diffuser

### OPTIONS

- Anodized aluminum reflector
- Finish - Bronze
- Built-in color adjustable control ranging from 3000K to 5000K

## APPLICATIONS

	Hotels
	Commercial Buildings
	Schools & Colleges

• Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote. \*\*DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

**PRODUCT DESCRIPTION**

Extruded aluminum tube provides strength and durability as well as protects and conceals the component wiring

Terminal block provided on the base bracket for easy installation

Quick disconnect located near the terminal block for simple connection to the LED driver



Easy access to the control switch for a range of CCTs and wattages to choose from



Versatile mounting plate allows for easy installation and replacement for any project or development



LED compartment is air tight to prevent fogging and condensation build up and keep water out

Aluminum reflector designed to reduce glare and to produce an even distribution

Clear UV resistant polycarbonate lens allows for optimal light transmission and protects the light engine compartment from harsh environments

Driver is mounted under the LED compartment for easy replacement and to protect water from accumulating in the base of the bollard. Torx security screws secure the LED compartment to the base to deter vandalism



GRPL-5510



GRPL-5510S



GRPL-5520



GRPL-5520S



• Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote. •DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

## PERFORMANCE DATA

Model No.	Nominal Watts	Dist. Type	Lumen*	Efficacy*
DRPL-5510 (S)	30 / 20 / 10W	Type V	3997 lm*	129 lm/w*
DRPL-5520 (S)	30 / 20 / 10W	Type V	1252 lm*	42 lm/w*

\* Lumen and Efficacy are based on highest wattage 5000K

## SPECIFICATIONS


Example: DRPL-5510 / 5520 / 5510S / 5520S

Model No.	Nominal Watts	Input Voltage	CRI	Color Temp	Finish	Starting Temp
DRPL-5510 DRPL-5520 DRPL-5510S DRPL-5520S	030=30W	HV3=120-347V	8=80+	30=3000 K 40=4000 K 50=5000 K	BN=Bronze	-40°C



• Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote. •DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

## DIMENSIONS

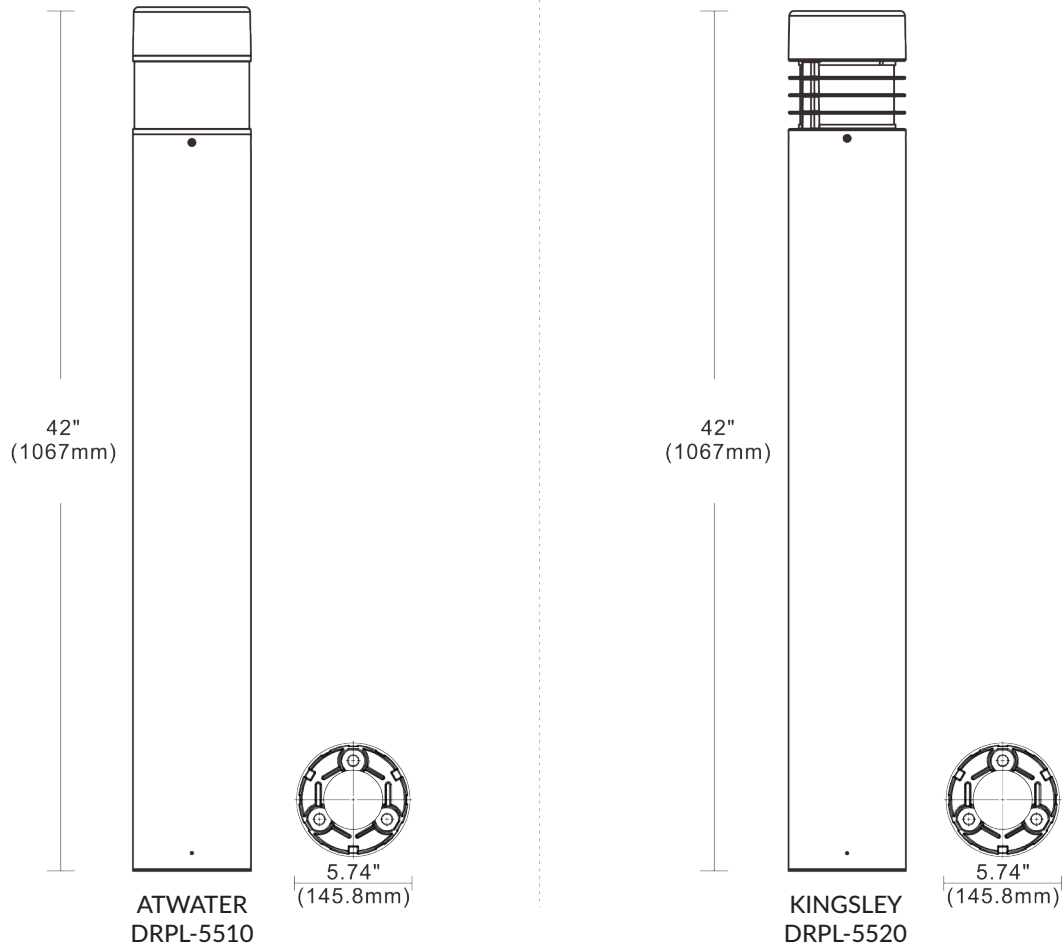

• Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote. •DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to  $\pm 10\%$ .