



PRODUCT OVERVIEW

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, meeting rooms, and workshops.



KEY FEATURES

LISTING

- UL and cUL listed

HOUSING

- Housing made of high quality steel with high reflectance paint, providing high lumen output.

AMBIENT TEMPERATURE

- Suitable for use in -40°C to +40°C

EFFICACY

- Up to 130 lumens per watt (see individual wattage data) CCT AND CRI
- 3000K, 4000K and 5000K CCT available, 80CRI

LENS

- Precision and high reflectance lens producing superior uniformity

ELECTRICAL

- Voltage: 120-277V standard, Class 2 constant current Drivers with 90% power factor, <20% TH D. Driver efficiency (>90% standard); 50/60Hz
- 2KV-4KV Surge
- Dimming 0-1 0V driver Standard
- Occupancy sensor (PIR) optional

FINISHES

- Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.



APPLICATIONS

	Supermarkets & Retail
	Hotels & Restaurants
	Commercial Buildings
	Schools & Colleges
	Offices & Showrooms


PERFORMANCE DATA

Model No.	System Watts	Lumens*	Efficacy*
DLED-WL4	37W	4312 lm*	117 lm/W*
DLED-WL4-U/D	36W	4378 lm*	122 lm/W*
DLED-WL6	56W	6577 lm*	117 lm/W*
DLED-WL6-U/D	55W	6666 lm*	122 lm/W*
DLED-WL8	73W	8624 lm*	118 lm/W*
DLED-WL8-U/D	72W	8733 lm*	122 lm/W*

*Lumen and efficacy are based on 5000K

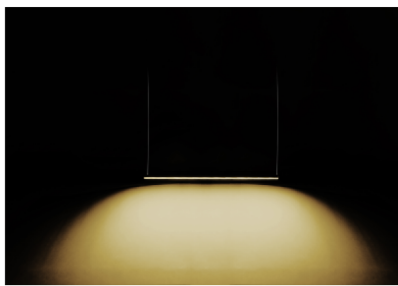

DLED-WL4




DLED-WL4-U/D



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

PRODUCT DESCRIPTION

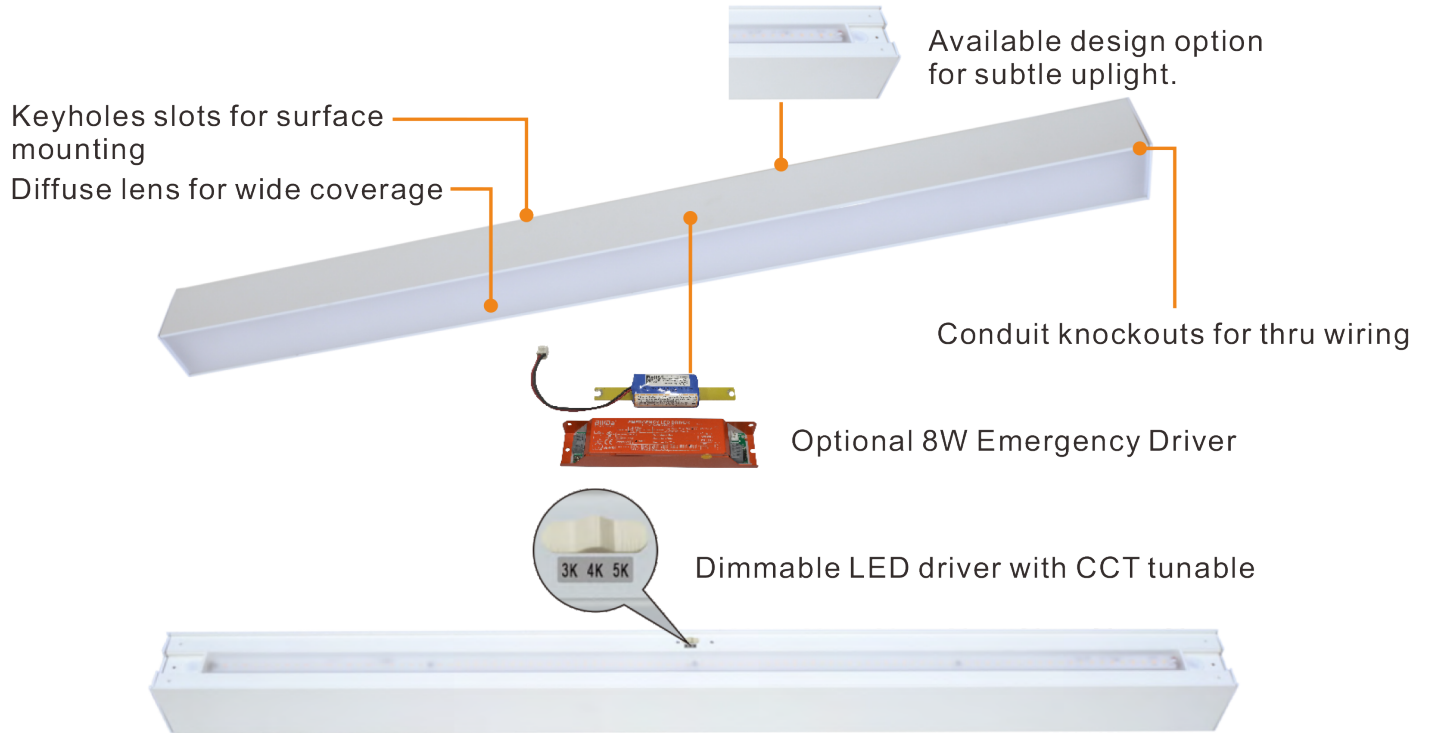

CONNECTABLE DESIGN AVAILABLE



Step 1: Remove the end cap from each fixture



Step 2: Insert one of the fixture into the connecting adapter to secure it



Step 3: Following step 2, inserting the other fixture into the other side of the adapter



Step 4: Use 4 screws to secure the fixture onto the connecting plate




* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

PRODUCT DESCRIPTION


PENDANT MOUNT

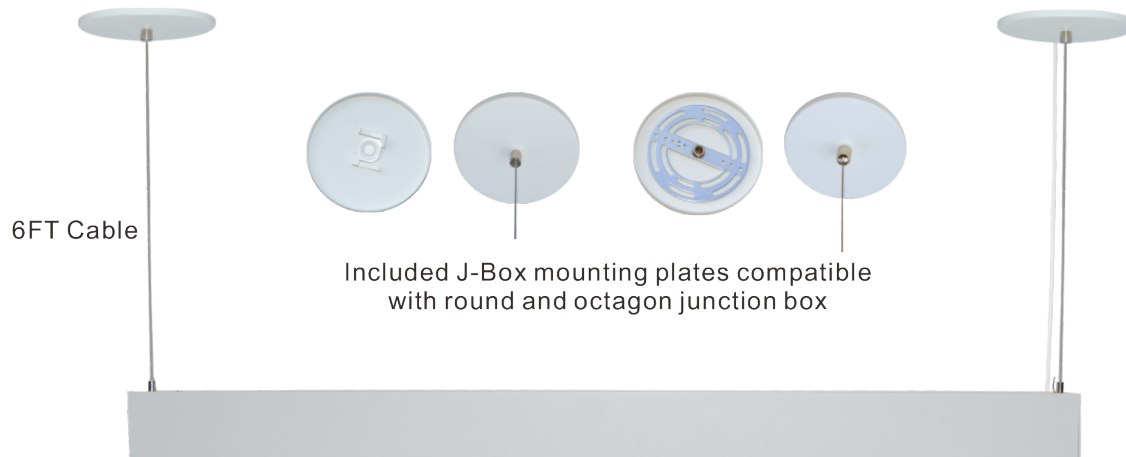

SURFACE MOUNT (QUICK MOUNT PLATE)



Included Quick Mount Plate for easy installation



Level Bubble




Uninstall the mounting bracket from fixture base plate by unscrewing the 2 hex socket studs.




Following the template, secure the base plate onto the fixture



Make sure two base plates are secured on each fixture



Lift the fixture up and tilt it slightly toward the quick mount plate as figure D shown, hook the fixture base plate with the mounting bracket.



Screw tight the bracket and fixture.



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

SPECIFICATION

Example: DLED-WL


Model No.	System Watts	Input Voltage	CRI	Color* Temp	Finish	Option
DLED-WL4	37W	WL4/ WL8	8=80+	30=3000 K 40=3000 K 50=5000 K	WH=White	BLANK = No Sensor EM = Emergency Driver
DLED-WL4-U/D	36W	UNV= 120-277VAC				
DLED-WL6	56W	WL4/WL6				
DLED-WL6-U/D	55W	HNV= 120-347VAC				
DLED-WL8	73W					
DLED-WL8-U/D	72W					

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.



** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

***WL4 120-277V is not tunable



DIMENSION

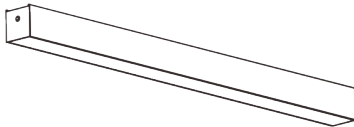


DLED-WL4-D/DLED-WL4-UD

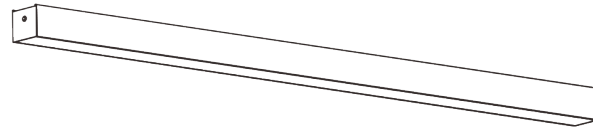

DLED-WL6-D/DLED-WL6-UD

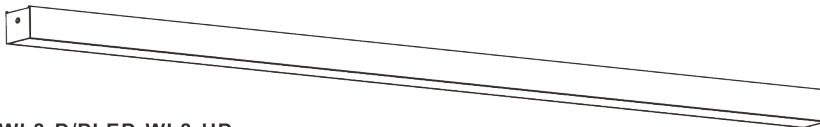

DLED-WL8-D/DLED-WL8-UD



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.