



DLED-ST-P

PRODUCT OVERVIEW/DLED-ST-P

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, meeting rooms, and workshops.



KEY FEATURES

LISTING

- UL- and CUL-listed for wet locations

HOUSING

- Housing made of high quality steel with high reflectance paint, providing high lumen output.


AMBIENT TEMPERATURE

- Suitable for use in -40°C to +40°C

APPLICATIONS

	Retail & Supermarkets
	Hotels & Restaurants
	Commercial Buildings
	Offices & Showrooms
	Schools & Colleges

PRODUCT DESCRIPTION

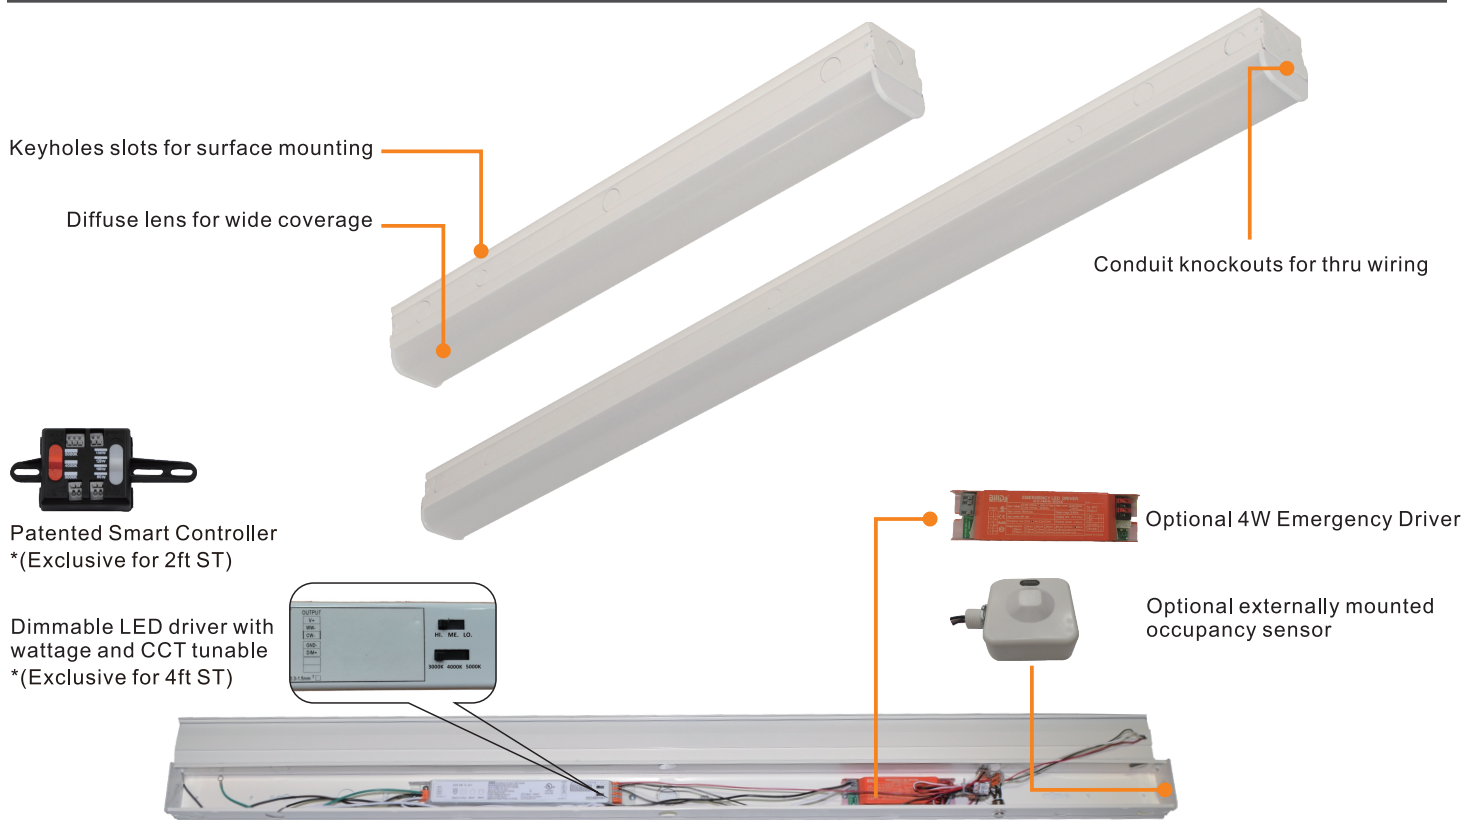

EFFICACY

- Up to 130 lumens per watt (see individual wattage data)

CCT AND CRI

- 3000K, 4000K and 5000K CCT available, 80CRI

LENS

- Precision and high reflectance lens producing superior uniformity

ELECTRICAL

- Voltage: 120-277V standard, Class 2 constant current Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard);50/60Hz

- 2KV-4KV Surge.
- Dimming 0-10V driver Standard.
- Occupancy sensor (PIR) optional.

FINISHES

- Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.



PERFORMANCE DATA

Model No.	System Watts	Lumens*	Efficacy*	Linkable
DLED-ST2-20P	7/14/20W	2585 lm*	129 lm/W*	2ft
DLED-ST4-45P	20/31/44W	5683 lm*	129 lm/W*	4ft connect up to 8ft

*Lumen and efficacy are based on highest wattage 5000K

SPECIFICATION

Example: DLED-ST-P




Model No.	System Watts	Input Voltage	CRI	Color Temp	Finish	Option
DLED-ST2-20P	7W 14W 20W	UNV= 120-277VAC	8=80+	30=3000 K 40= 4000 K 50=5000 K	WH=White	FAO = Tunable Smart Controller BLANK = No Sensor OS =Occupancy Sensor EM = Emergency Driver
DLED-ST4-45P	20W 31W 44W					

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

LINE DRAWING & DIMENSIONS

DLED-ST2-20P




24.1"
612mm

2.65"
67.4mm

3.03"
77mm

LINE DRAWING & DIMENSIONS

DLED-ST4-45P

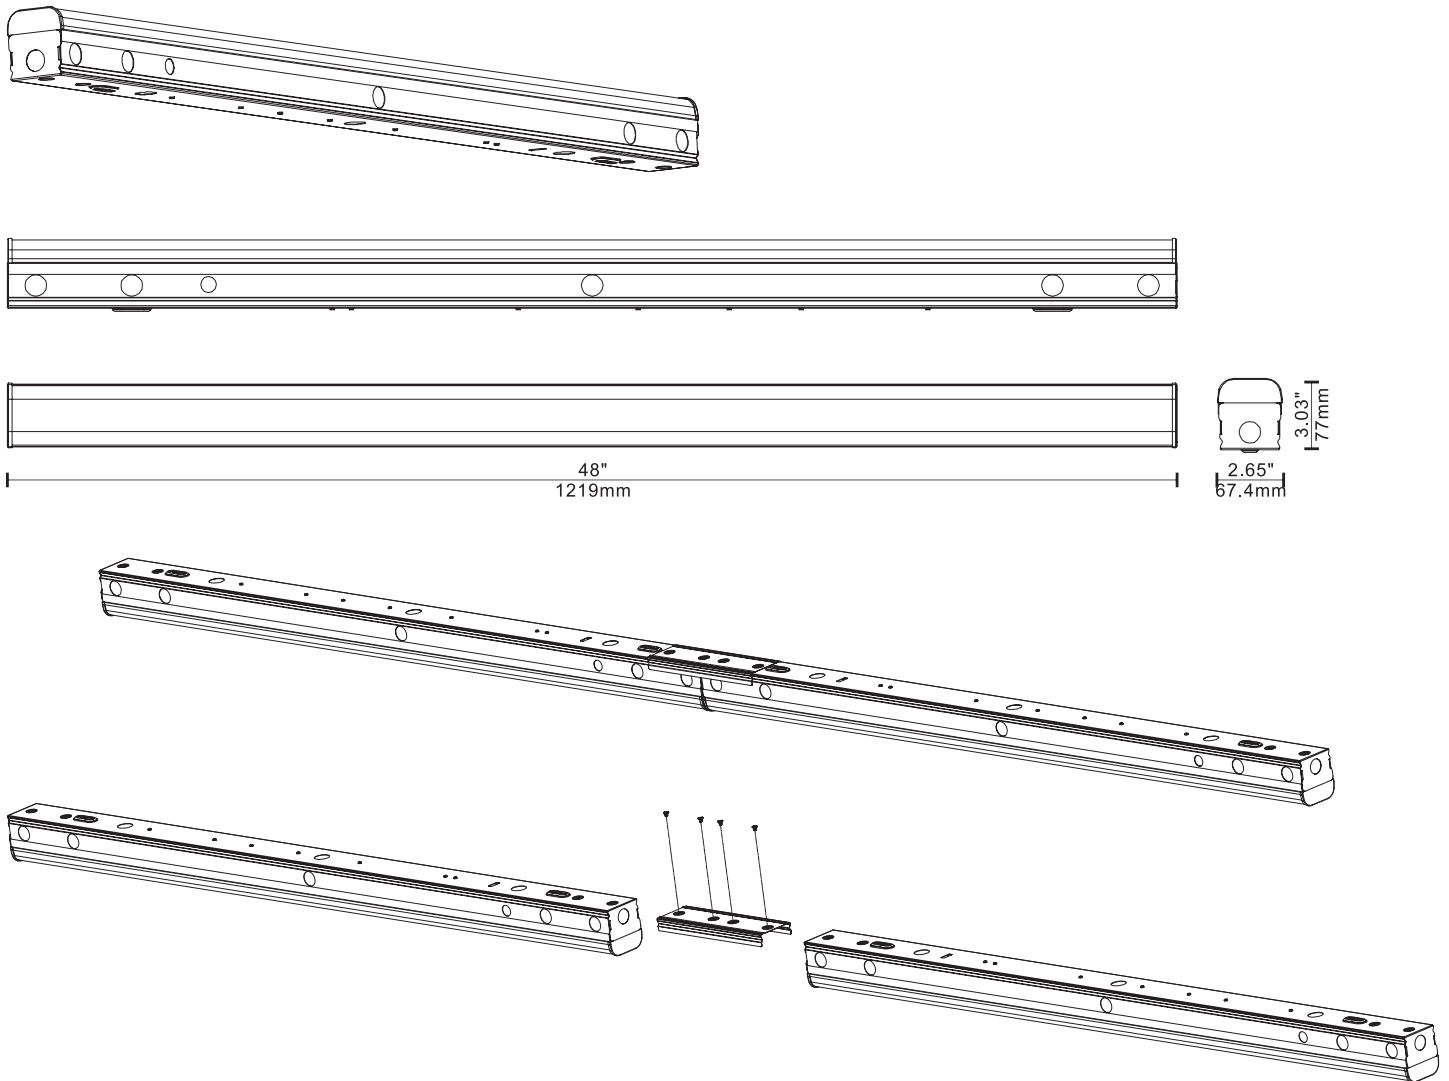

Circuit Diagram